

Fiber Optical Attenuator

OPCU Series

Features:

- Low insertion loss
- Low back reflection loss
- Stable attenuation in a wide wavelength range
- Various connector types: FC, SC
- Custom defined specifications
- Precise dimension
- Compatible with NTT standard
- Good durability

Applications:

- Telecommunication Networks
- Instrumentation
- LAN/WAN
- CATV
- Multimedia
- Test equipment



Specifications: OPC-UXX---XXXXXX

ATTENUATOR				
Attenuation (dB)	5,10,15,20			
Connector type	FC		SC	
Polish type	PC	APC	PC	APC
Return Loss (1310 ±20nm)	≥ 50db	≥ 60db	≥ 50db	≥ 60db
Wave length	1310,1550±20nm			


- Bellcore: GR-910-CORE
- Temp Range : -40℃ to +85℃
- Durability: <0.2db change after 500 cycles

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT II) 252, SHANG YING ROAD, KUEI SAN SHIANG, TAOYUAN SHIEN 333, TAIWAN R.O.C.
TEL: +886-3-3591968 FAX: +886-3-3591991

<http://www.deltaww.com>

Dimension:

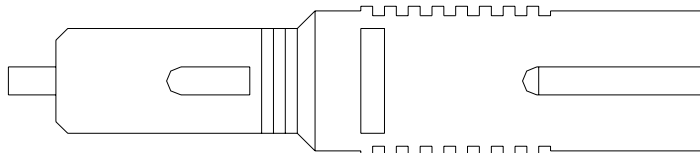

Order Information:

OPC ATTENUATOR Model Name

OPC - U X X X X - X X X XX

Attenuator

00:Delta Standard

A0:OEM/ODM Customer Code

Connector type

0: None

1: FC/PC

2: FC/SPC

3: FC/UPC

4: FC/APC

5: SC/PC

6: SC/SPC

7: SC/UPC

8: SC/APC

9: ST

A: LC/MU

Reserved

Reserved

Wavelength

W3: 1310nm

W5: 1550nm

Wb: 1310&1550nm

XX : others

Attenuation

00: Adaptor / Connector

01: 1.0 dB

02: 2.0 dB

03: 3.0 dB

05: 5.0 dB

07: 7.0 dB

10: 10.0 dB

15: 15.0 dB

20: 20.0 dB

25: 25.0 dB

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT II) 252, SHANG YING ROAD, KUEI SAN SHIANG, TAOYUAN SHIEN 333, TAIWAN R.O.C.

TEL: +886-3-3591968 FAX: +886-3-3591991

<http://www.deltaww.com>