

# Multimode 850 nm 1X9 Fiber Optic Transceiver for Gigabit Ethernet

DC/DC (3.3V) **OPT-1250A2F1A**

## FEATURES

- Compliant with IEEE802.3z/D2 Gigabit Ethernet (1000BASE-SX) Specification
- SC Duplex Multimode Transceiver
- Industrial Standard 1x9 Footprint, Cost Effective Design
- 850 nm Vertical Cavity Surface Emitting Laser (VCSEL) Source Technology
- Data Link up to 500 Meters in 50/125 MMF, 220 Meters in 62.5/125 MMF.
- Single + 3.3V Power Supply and PECL Logic Interface
- Signal detection function (TTL/PECL output)
- Class 1 FDA and IEC laser safety compliant

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Storage temperature	T <sub>S</sub>	-40		85	°C	
Lead soldering temperature	T <sub>SOLD</sub>			260	°C	
Lead soldering time	t <sub>SOLD</sub>			10	sec.	
Supply voltage	V <sub>CC</sub>	0		6	V	

### Recommended Operating Conditions:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Ambient Operating Temperature	T <sub>A</sub>	0		70	°C	
Supply voltage	V <sub>CC</sub>	3.135		3.465	V	
Transmitter Differential Input Voltage	V <sub>D</sub>	0.3		1.6	V	
Data Output Load	R <sub>DL</sub>		50		Ω	

 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:	
	<b>OPT-1250A2F1B</b>				
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:	REV:
	Alston.huang	Teddy Kuo	Y.Y.Tsai		

# Multimode 850 nm 1X9 Fiber Optic Transceiver for Gigabit Ethernet

## Transmitter Electro-Optical Performance Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Supply current	I <sub>cc</sub>			180	mA	
Launched power(avg.)	P <sub>O</sub>	-9.5		-4	dBm	Note(1)
Optical extinction ratio		9			dB	Note(1)
Center wavelength	$\lambda_c$	830	850	860	nm	
Spectral width(RMS)	$\sigma$			0.85	nm rms	
Optical risetime	t <sub>r</sub>			0.26	ns	Note(2)
Optical falltime	t <sub>f</sub>			0.26	ns	Note(2)
Relative Intensity Noise	RIN			-117	DB/Hz	

Note(1).The maximum optical output power complies with the IEEE 802.3z/D2 specification, and is class 1 laser eye safe.

Note(2).These are unfiltered 20-80% values.

## Receiver Electro-Optical Performance Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Supply current	I <sub>cc</sub>			130	mA	
Data output differential voltage	V <sub>D</sub>	0.5	0.7	1.23	V	
Optical input sensitivity(avg.)	P <sub>IN</sub>			-17	dBm	Note(1)
Optical input saturation(avg.)	P <sub>SAT</sub>	-3			dBm	Note(1)
Optical wavelength	$\lambda$		850		nm	
Output Data risetime	t <sub>r</sub>			0.4	ns	Note(2)
Output Data falltime	t <sub>f</sub>			0.4	ns	Note(2)
Signal detect-Assert	P <sub>A</sub>			-18	dBm	
Signal detect-Deassert	P <sub>D</sub>	-30			dBm	
Signal detect-Hysteresis	P <sub>A</sub> -P <sub>D</sub>	0.5			dB	

Note(1).With BER better than or equal to  $1 \times 10^{-12}$ , measured in the center of the eye opening with  $2^{23}-1$  NRZ PRBS

Note(2).These are 20%~80% values

 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:	
	OPT-1250A2F1B				
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:	REV:
Alston.huang	Teddy Kuo	Y.Y.Tsai			




# Multimode 850 nm 1X9 Fiber Optic Transceiver for Gigabit Ethernet

**TYPE : B (Protruding Shield)**

## Mechanical Dimensions

Unit : mm

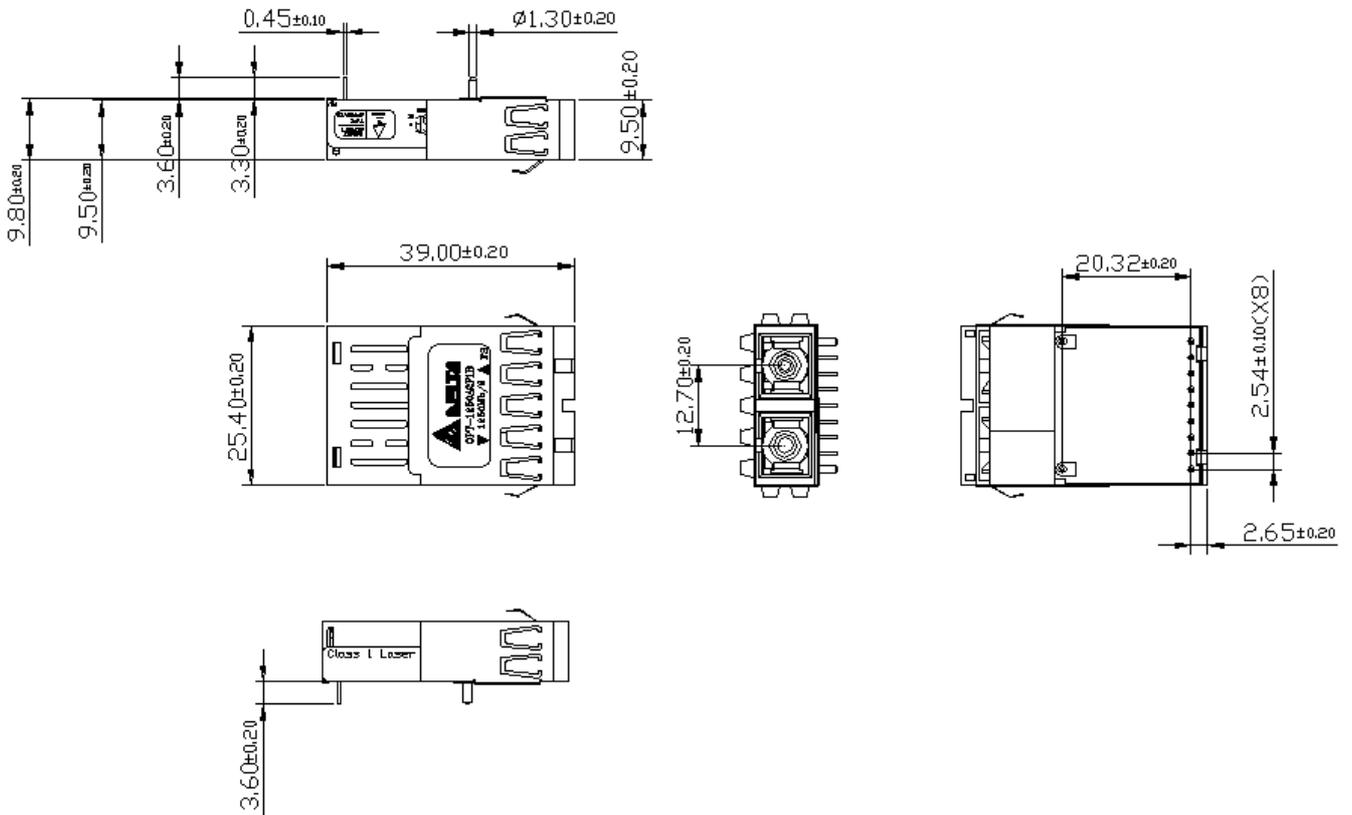

 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:	
	OPT-1250A2F1B				
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:	REV:
Alston.huang	Teddy Kuo	Y.Y.Tsai			

# Multimode 850 nm 1X9 Fiber Optic Transceiver for Gigabit Ethernet

Test Item	Reference	Qty'	Evaluation
(#1) Electromagnetic Interference EMC	FCC Class B EN 55022 Class B CISPR 22	5	(1) Satisfied with electrical characteristics of product spec.  (2) No physical damage
(#2) Immunity : Radio Frequency Electromagnetic Field	EN 61000-4-3 IEC 1000-4-3	5	
(#3) Immunity : Electrostatic Discharge to the Duplex SC Receptacle	EN 61000-4-2 IEC 1000-4-2 IEC 801.2	5	
(#4) Electrostatic Discharge to the Electrical Pins	MIL-STD-883C Method 3015.4  EIAJ#1988.3.2B Version 2, Machine model	5	

 <b>DELTA ELECTRONICS, INC.</b>	TITLE OPT-1250A2F1B			DATE:
	WRITTEN Alston.huang	CHECKED Teddy Kuo	APPROVED Y.Y.Tsai	DOCUMENT NO:
				REV :