



O2-A2 Oxygen Sensor



Technical Specification

Figure 1 O2-A2 Schematic Diagram


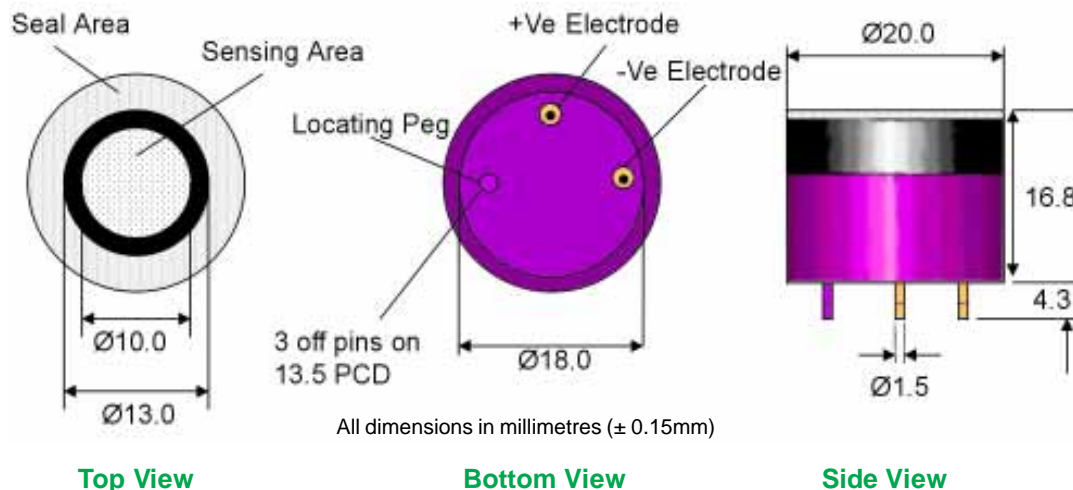


Table 1 O2-A1 Specification

PERFORMANCE	Output	μA @ 22°C, 20.9% O ₂	85 to 120
	Response time	t ₉₀ (s) from 20.9% to 0% O ₂ (47Ω)	< 10
	Zero current	μA @ 99.999% N ₂ , 22°C	< 2
	Pressure sensitivity	(% change of output)/(% change of pressure) @ 20kPa	< 0.1
	Linearity	% O ₂ deviation @ 10% O ₂	< 0.6
	Hysteresis	% O ₂ change after 16 cycles: 0 to 20.9% O ₂ @ 22°C	< 0.2
	Hand aspirator response	% O ₂ change during aspiration (typical)	19 to 22.5
LIFETIME	Output drift	% change in output @ 3 months	< 2
	Operating life	months until 85% original output in 20.9% O ₂	> 24
ENVIRONMENTAL	Humidity Sensitivity	% O ₂ change: 0% to 95% rh @ 40°C	< 0.7
	CO ₂ sensitivity	% change in output / % CO ₂ @ 5% CO ₂	< 0.1
PHYSICAL DIMENSIONS	Diameter	mm (including label) (± 0.1 mm)	20
	Height	mm (including foam ring) (± 0.1 mm)	16.8
	Weight	g	16
KEY SPECIFICATIONS	Temperature range	°C	-20 to 55
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous (0 to 99% rh short term)	5 to 95
	Storage period	months @ 3 to 20°C (store in sealed pot)	6
	Load resistor	Ω (recommended)	47 to 100

NOTE: all sensors tested and stored at ambient environments unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.



O2-A2 Performance Data



Technical Specification

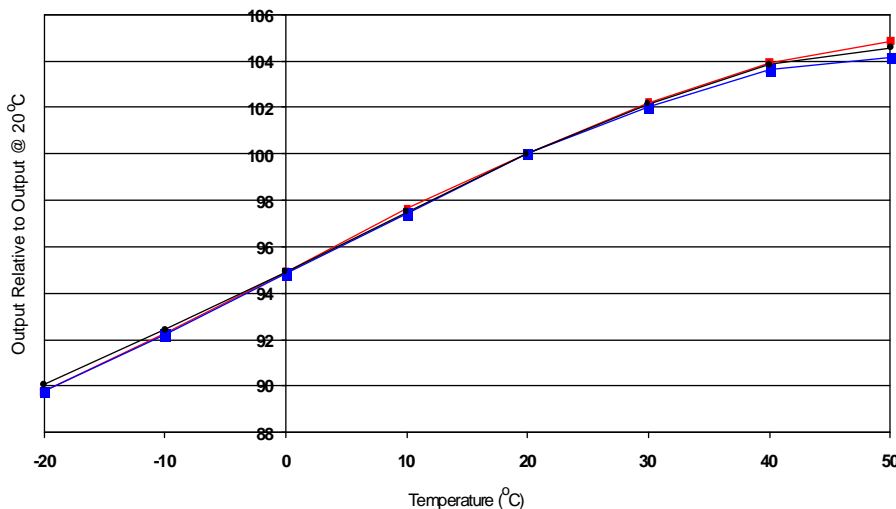


Figure 2 Temperature Performance

Figure 2 shows the variation in sensitivity caused by changes in temperature. All capillary oxygen sensors will show some variation in signal output with temperature and the typical response of an O2-A2 is shown.

(See Application Note AAN 110-01)

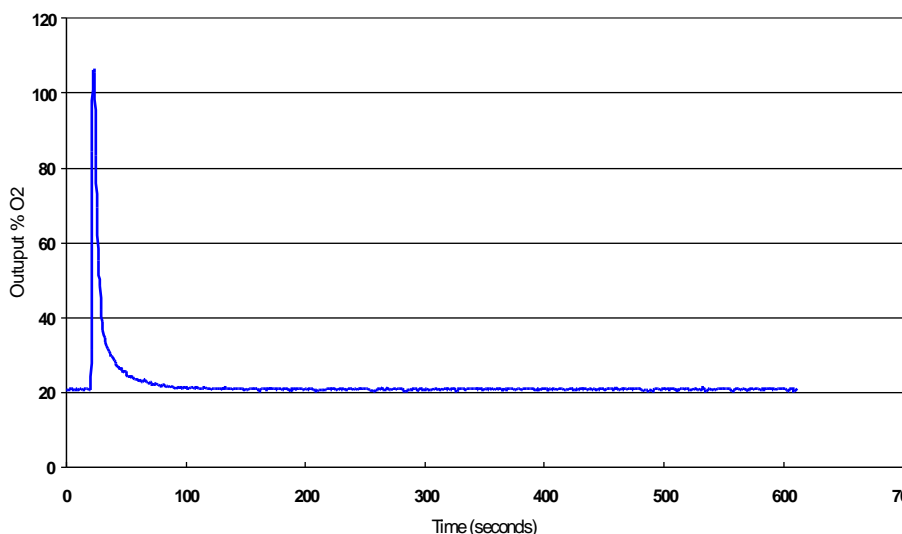


Figure 3 Pressure Pulse Performance

Step changes in pressure can cause a temporary signal transient. Positive pressure gives a output signal increase whilst negative pressure causes the output signal to decrease. Typical transient response for an O2-A2 sensor exposed to a 10kPa pressure pulse is shown. (See Application Note AAN 110-01)

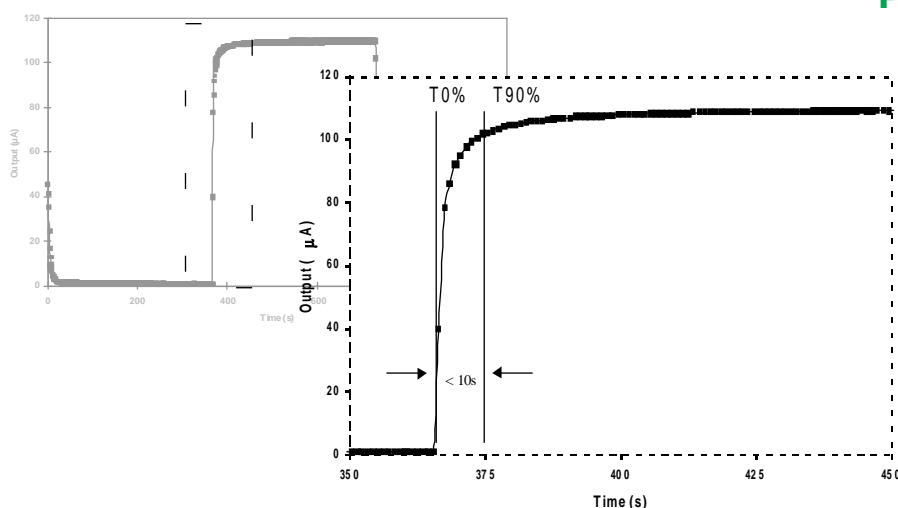


Figure 4 t₉₀ Response

Figure 4 shows the time for an O2-A2 sensor to reach 90% of its maximum output (t₉₀ response time). - typical times for O2-A2 sensors are < 10 seconds (47 Ω resistor).

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it
(©ALPHASENSE LTD) Doc. Ref. TDS/O2A2/101