


Advanced Specification

50-60A DC/DC Power Modules

48V Input, 2.5V Output

- *High efficiency 88% Typ (50A) at full load*
- *High power density, 51.7 W/in³, (2.5V @ 60A)*
- *Fast dynamic response, 200 μ s, ± 200 mVpeak Typ*
- *Low output ripple, 80 mVp-p Typ*
- *Parallelable with no external components*
- *Wide input voltage range (36-75V)*
- *1,500Vdc isolation voltage*
- *Max case temperature +100°C*
- *Designed to meet UL 1950 and EN 60950*

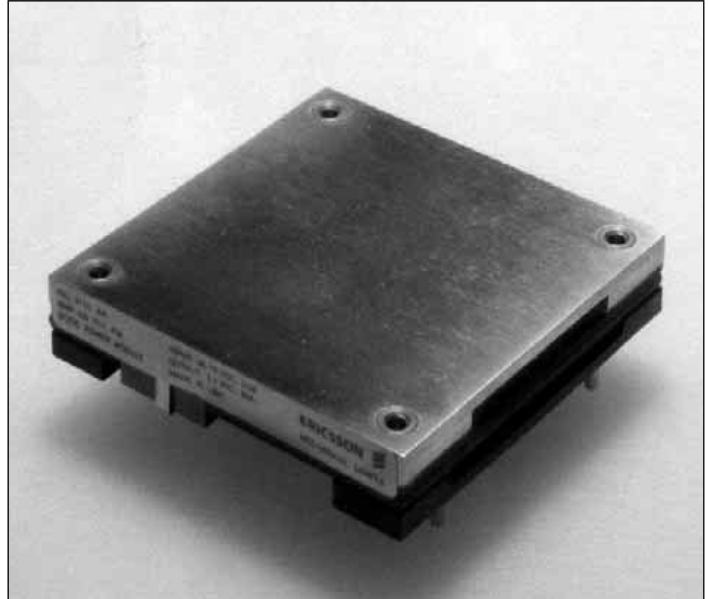

The PKL series represents another one of Ericsson's "industry first" achievements in the continued development of our "Third Generation" of high-density, high-efficiency power modules. This module packs 51.7 W/in³ at 87% efficiencies (2.5V @ 60A) in an industry standard footprint that has been enhanced to include two additional output pins for motherboard connection reliability. These breakthrough features come from using the most advanced patented topology utilizing integrated magnetics and synchronous rectification on a low-resistivity multilayer PCB.

This product features fast dynamic response times and low output ripple, which are important parameters when supplying low-voltage logics. The PKL series also is especially suited for limited board space and high dynamic load applications.

Ericsson's PKL Power Module has been designed with the converging "New Telecoms" market in mind, by specifying the input voltage range in accordance with ETSI specifications. The PKL series also offers over-voltage protection, under-voltage protection, over-temperature protection, soft-start, and is short circuit proof.

These modules are manufactured on highly automated manufacturing lines. Ericsson's world-class quality commitment is reflected in our standard five-year warranty. Ericsson Microelectronics has been an ISO 9001 certified supplier since 1991.

For a complete product program, please reference the back cover.

General

Connections

Designation	Function
-INPUT	Negative input. Connected to base plate
CASE REMOTE	Remote control (primary).
ON/OFF	To turn-on and turn-off the output
+INPUT	Positive input
-OUTPUT	Negative output, (two pins)
-SENSE	Negative remote sense
TRIM	Output voltage adjust
+SENSE	Positive remote sense
+OUTPUT	Positive output, (two pins)

Note: If the remote sense is not needed the -Sen should be connected to -Out and +Sen should be connected to +Out.

Weight

100 grams

Case

Aluminum baseplate with metal standoffs.


Pins

Pin material: Copper Alloy
Pin plating: Tin/Lead over Nickel.

Input $T_C < T_{Cmax}$

Characteristics		Conditions		min	typ	max	Unit
V_I	Input voltage range			36		75	Vdc
V_{Ioff}	Turn-off input voltage	Ramping from higher voltage		31	33		Vdc
V_{Ion}	Turn-on input voltage	Ramping from lower voltage			34	36	Vdc
C_I	Input capacitance			3.5			μF
$I_{I\max}$	Maximum input current	$V_I = V_{I\min}$	125 W 150 W			5.5 6.5	A
P_{Ii}	Input idling power		$I_O = 0$		6		W
P_{RC}	Input stand-by power (turned off with RC)	$V_I = 50V$	RC open		0.6		W
TRIM	Maximum input voltage on trim pin					6	Vdc

Mechanical Data

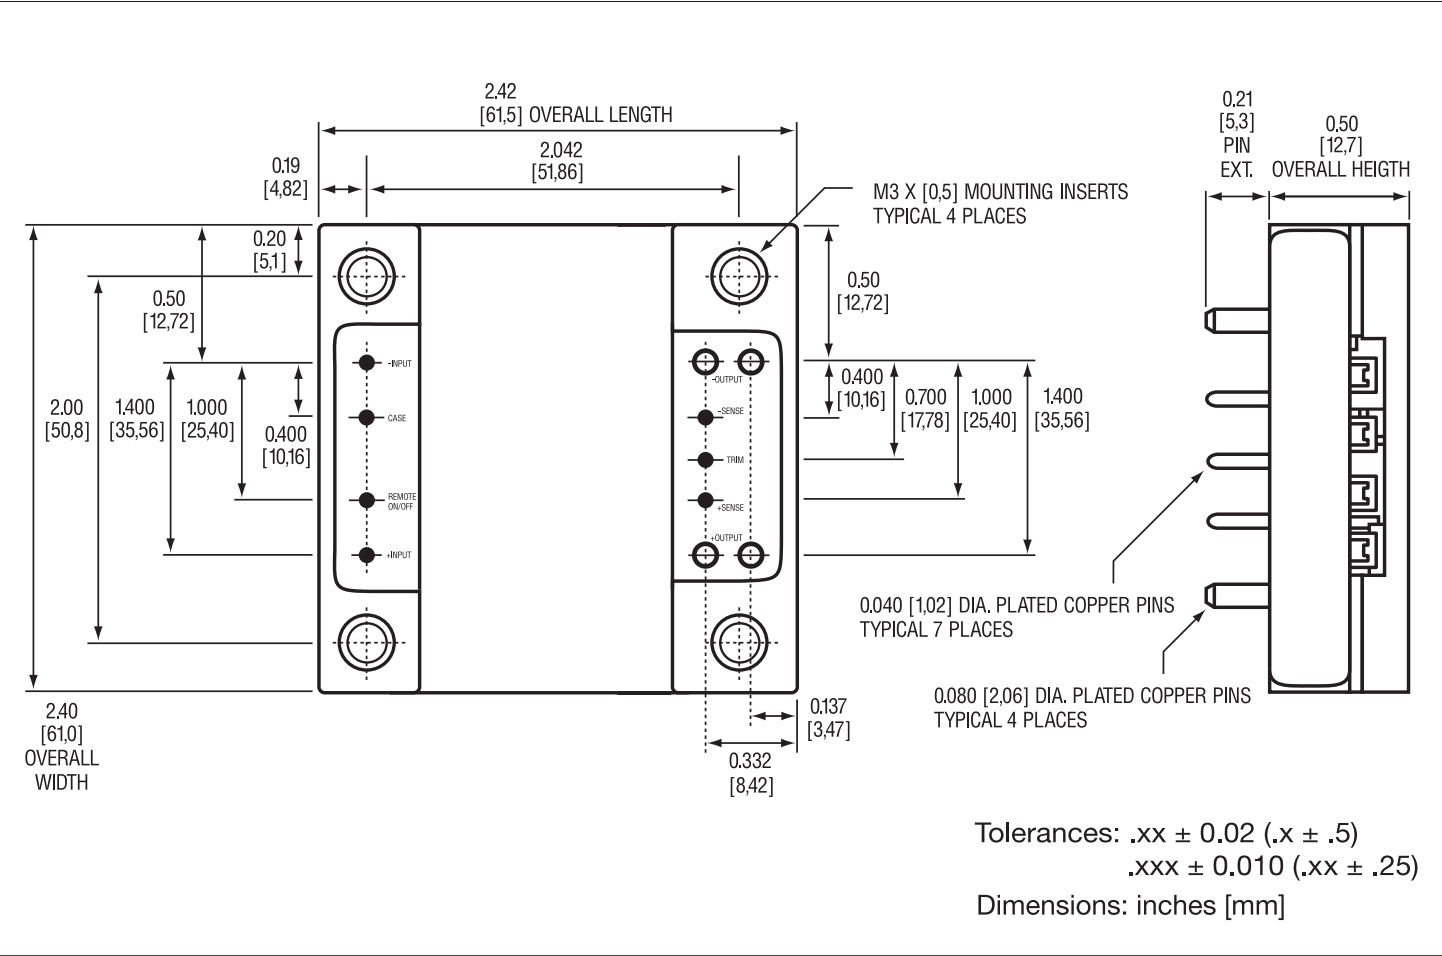

PKL 4119A PI/PKL 4119 PI $T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...75\text{ V dc}$ unless otherwise specified.

Output

Characteristics		Conditions	Device	Output			Unit
				min	typ	max	
V_{OI}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{O\text{max}}$	All	2.45	2.50	2.55	V
	Output adjust range	$I_O = 0$ to $I_{O\text{max}}$	All	2.0		2.75	V
I_O	Output current		PKL 4119A PI PKL 4119 PI	0 0		60 50	A
V_O	Output voltage tolerance band	$I_O = 0$ to $I_{O\text{max}}$	All	2.38		2.63	V
	Line regulation	$I_O = I_{O\text{max}}$	All		5	15	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to $I_{O\text{max}}$	All		5	15	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{O\text{max}}$ $dl/dt = 1\text{A}/\mu\text{s}$	All		± 200		mV_{peak}
t_{tr}	Load transient recovery time		All		200		μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{O\text{nom}}$	All		20	30	ms
I_{lim}	Current limit threshold	$V_O = 0.96 V_{O\text{nom}}$ @ $T_C < 100^{\circ}\text{C}$	PKL 4119A PI PKL 4119 PI	61 51	64.5 54.5	72 62	A
I_{SC}	Short circuit current		PKL 4119A PI PKL 4119 PI		65 55	79 69	A
V_{Oac}	Output ripple and noise	$I_O = I_{O\text{max}}$ $f \leq 20\text{ MHz}$	All		80	150	mVp-p
SVR	Supply voltage rejection (ac)	$f < 1\text{kHz}$	All	-50			dB
OVP	Over voltage protection	$V_{in} = 50\text{V}$	All	3.0	3.5	3.9	V

Miscellaneous

Characteristics		Conditions	Device	min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{O\text{max}}$	PKL 4119A PI PKL 4119 PI		88 89		%
P_d	Power dissipation	$I_O = I_{O\text{max}}$, $V_I = 53\text{V}$	PKL 4119A PI PKL 4119 PI		20.5 15.4		W

Absolute Maximum Ratings

Characteristics		min	max	Unit
T_C	Case temperature @ max output power	-40	+100	$^{\circ}\text{C}$
T_S	Storage temperature	-40	+125	$^{\circ}\text{C}$
V_I	Continuous input voltage	-0.5	+80	Vdc
V_{ISO}	Isolation voltage (input to output test voltage)	1,500		Vdc
V_{RC}	Remote control voltage		12	Vdc
I^2t	Inrush transient		1	A^2s

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as “no destruction limits,” are normally tested with one parameter at a time exceeding the limits of output data or electrical characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Product Program

V_I	V_O/I_O	P_{Omax}	Ordering Number
48/60 V	2.5V/60A	150W	PKL 4119A PI
48/60 V	2.5V/50A	125W	PKL 4119 PI

The PKL 4000 DC/DC power modules will be available with the different options listed in the Product Options table.

Please check with the factory for availability.

Product Options

Option	Suffix	Example
Negative remote on/off logic Ericsson Unique Trim, (i.e. V_{out} Adjust)	–	PKL 4119A PI
Positive remote on/off logic	P	PKL 4119A PIP
Lead length of 0.145" \pm 0.010"	LA	PKL 4119A PILA

Ericsson Microelectronics' Sales Offices:

Brazil:	Phone: +55 11 681 0040	Fax: +55 11 681 2051
Denmark:	Phone: +45 33 883 109	Fax: +45 33 883 105
Finland:	Phone: +358 9 299 4098	Fax: +358 9 299 4188
France:	Phone: +33 1 4083 7720	Fax: +33 1 4083 7741
Germany:	Phone: +49 211 534 1516	Fax: +49 211 534 1525
Great Britain:	Phone: +44 1793 488 300	Fax: +44 1793 488 301
Hong Kong:	Phone: +852 2590 2356	Fax: +852 2590 7152
Italy:	Phone: +39 2 7014 4203	Fax: +39 2 7014 4260
Japan:	Phone: +81 3 5216 9091	Fax: +81 3 5216 9096
Norway:	Phone: +47 66 841 906	Fax: +47 66 841 909
Russia:	Phone: +7 095 247 6211	Fax: +7 095 247 6212
Spain:	Phone: +34 91 339 1858	Fax: +34 91 339 3145
Sweden:	Phone: +46 8 721 6258	Fax: +46 8 721 7001
United States:	Phone: +1 877 374 2642	Fax: +1 972 583 8355

Information given in this data sheet is believed to be accurate and reliable. No responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Inc. These products are sold only according to Ericsson Inc.'s general conditions of sale, unless otherwise confirmed in writing.

The contents of this document are subject to revision without notice due to continued progress in design and manufacturing.

Ericsson Inc.
Microelectronics
701 North Glenville Drive
Richardson, Texas 75081
Phone: 877-ERICMIC
www.ericsson.com/micro

Advanced Specification

AE/LZT 108 3973 R1
© Ericsson Inc., April 2000