

PC419K

Compact Surface Mounted, Bi-directional Linear Output Type Photocoupler

■ Features


1. Bi-directional linear output
2. High breakdown voltage
(V_{BR} : 120V)
3. Low collector dark current
(I_d : MAX. 10nA)
4. High isolation voltage between input and output (V_{iso} : 3 750V_{rms})

■ Applications

1. Board testers
2. Programmable controllers
3. Analog switch
4. Hybrid substrates which require high density mounting

■ Outline Dimensions

(Unit : mm)

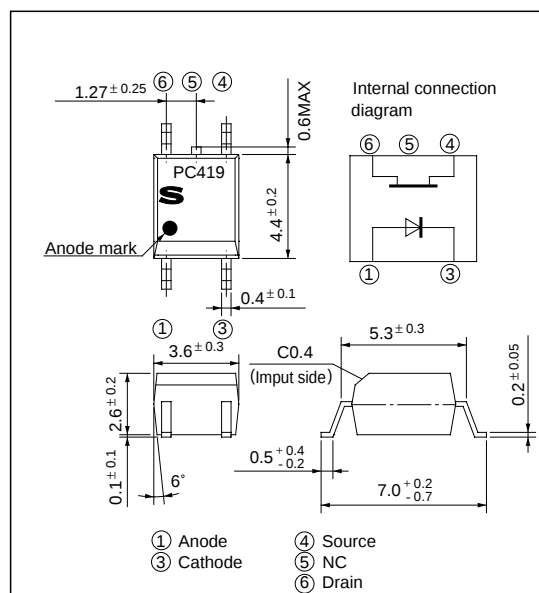

■ Package Specifications

Model No.	Package specifications	Diameter of reel	Tape width
PC419K	Taping package (Net : 3 000pcs.)	φ 370mm	12mm
PC419KT	Taping package (Net : 750pcs.)	φ 178mm	12mm
PC419KZ	Sleeve package (Net : 100pcs.)	-	-


■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Reverse voltage	V_R	6	V
	*1Power dissipation	P	70	mW
Output	Output current	I_O	10	mA
	Breakdown voltage	V_{BR}	120	V
	*1Power dissipation	P_O	100	mW
Total power dissipation		P_{tot}	120	mW
*1Isolation voltage		V_{iso}	3 750	V _{rms}
Operating temperature		T_{opr}	- 25 to + 100	°C
Storage temperature		T_{stg}	- 40 to + 125	°C
*2Soldering temperature		T_{sol}	260	°C

*1 AC for 1 minute, 40 to 60% RH

*2 10 seconds or less, 0.2mm or more from the root of lead.



" In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device."

■ Electro-optical Characteristics

(T_a = 25°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 16mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 6V	-	-	10	μA
	Terminal capacitance	C _{t1}	V = 0, f = 1kHz	-	50	250	pF
Output	*3Breakdown voltage	V _{BR}	I ₄₆ = 100 μA, I _F = 0	120	-	-	V
	*3Collector dark current	I _d	V ₄₆ = 100V, I _F = 0	-	-	10	nA
	*3OFF-state resistance	R _{OFF}	V ₄₆ = 100V, I _F = 0	10 ¹⁰	-	-	Ω
	Terminal capacitance	C _{t2}	V ₄₆ = 0, f = 1MHz	-	-	25	pF
Transfer characteristics	*3ON-state resistance	R _{ON}	I _F = 16mA, I ₄₆ = 100 μA	-	-	200	Ω
	Isolation resistance	R _{ISO}	DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹	-	Ω
	Floating capacitance	C _f	V = 0, f = 1MHz	-	-	2.5	pF
	Turn-on time	t _{on}	I _F = 16mA, V ₄₆ = 5V	-	-	65	μs
	Turn-off time	t _{off}		-	-	65	

*3 Applies to forward and reverse directions between terminals 4 and 6.

Fig. 1 Forward Current vs. Ambient Temperature

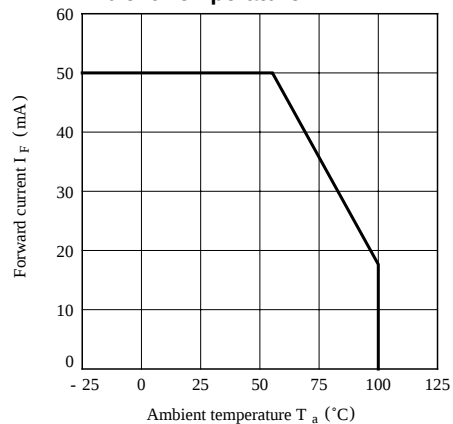


Fig. 2 Power Dissipation vs. Ambient Temperature

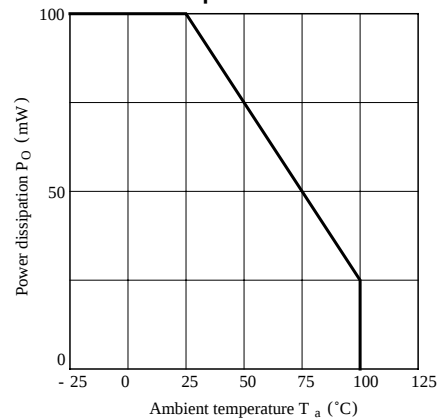


Fig. 3 Peak Forward Current vs. Duty Ratio

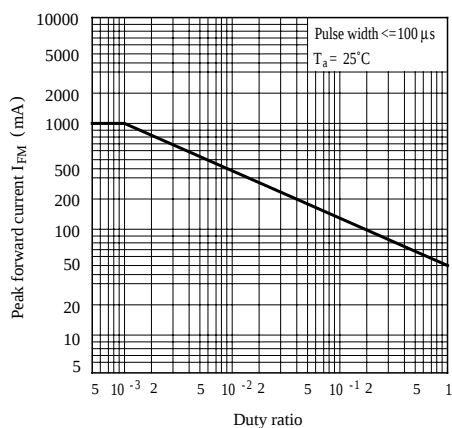


Fig. 4 Forward Current vs. Forward Voltage

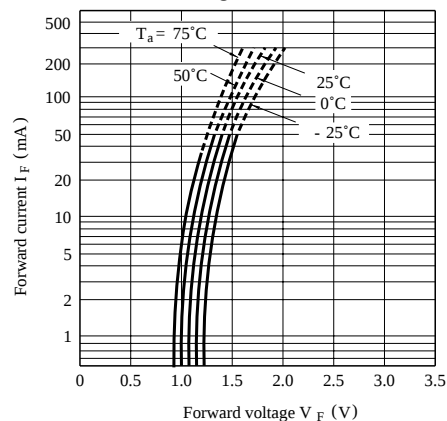


Fig. 5 Output Current vs. Output Voltage

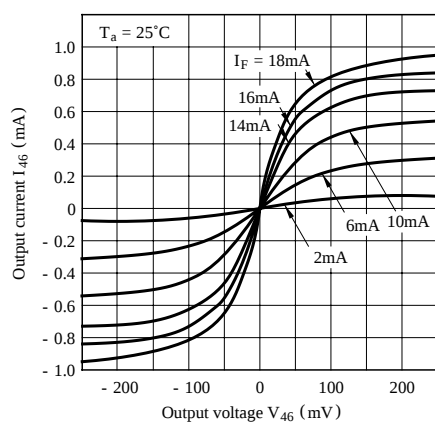


Fig. 6 ON-state Resistance vs. Forward Current

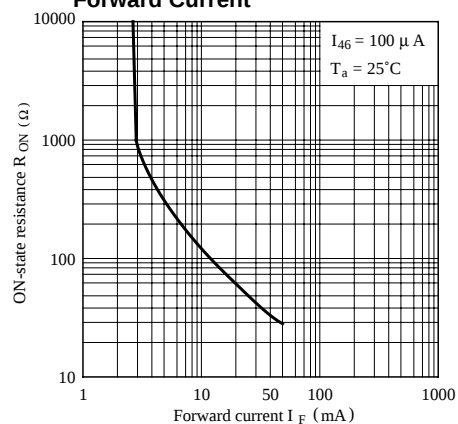


Fig. 7 Relative ON-state Resistance vs. Ambient Temperature


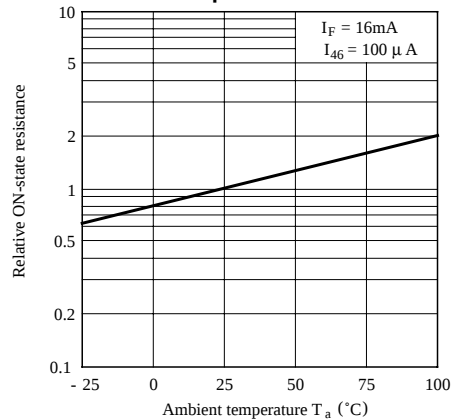


Fig. 8 Relative Collector Dark Current vs. Ambient Temperature

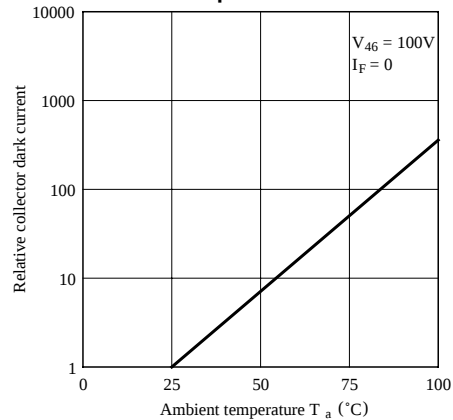

● Please refer to the chapter "Precautions for Use".