


PC Series

Phase Comparator (Detector)

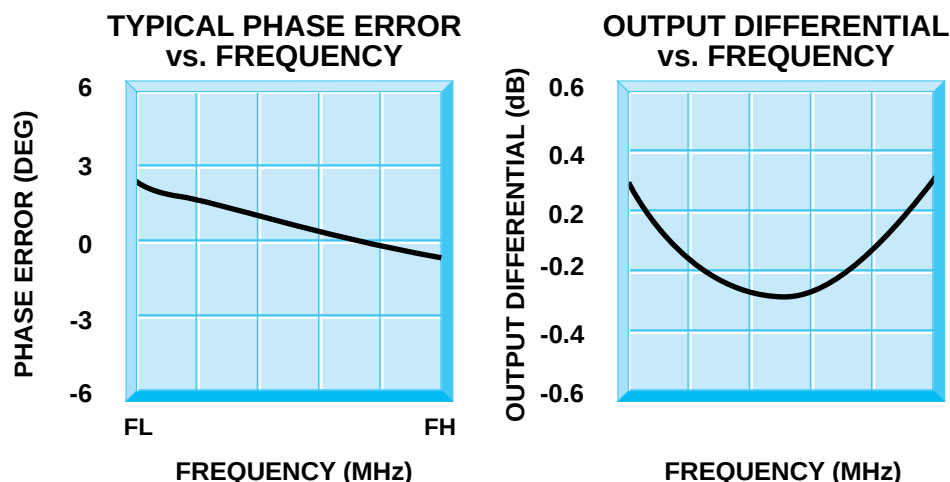

Guaranteed Specifications (-54° to +85°C)

Input Levels:	
Signal	0 dBm Max.
Ref. Nominal	-10 dBm Max.
Input Impedance	50 Ohms
Output Voltage	150 to 170 MV
	(Sine & Cosine 5K for specified input)
DC Offset Voltage	3 MV Max.
	(Sine & Cosine Output)
Phase Range	0 to 360°
Phase Error	Below 250 MHz $\pm 3^\circ$
	Above 250 MHz $\pm 5^\circ$
Amplitude Differential	0.5 dB Max.
	(Between Sine & Cosine Outputs)


Product Selection Guide

Part No.	Frequency Range MHz
PC-10	7 to 14
PC-15	10 to 20
PC-20	14 to 28
PC-30	20 to 40
PC-45	30 to 60
PC-60	40 to 80
PC-70	55 to 90
PC-100	70 to 140
PC-120	80 to 160
PC-150	100 to 200
PC-200	150 to 300
PC-240	160 to 320
PC-300	225 to 400
PC-375	360 to 390


SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328

Mechanical Outline

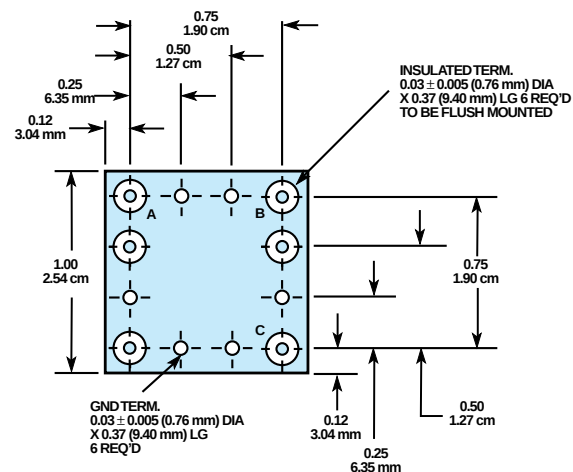


FP8 Package

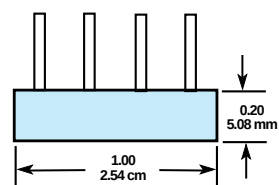

P Package

Functional Schematic

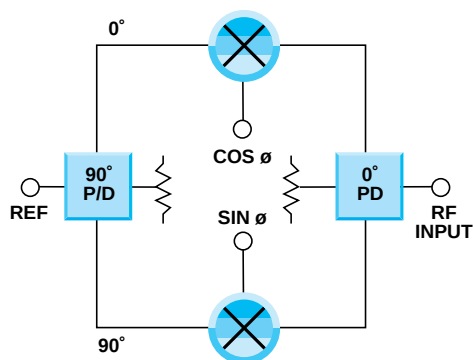

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION
28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328