

# APOLLO PM601

With its rich built-in AGP 2X graphics capabilities, flexible 66/100/133 MHz system bus settings, and support for PC100/133 SDRAM, the VIA Apollo PM601 chipset delivers new levels of scalability and performance on a cost-effective, integrated chipset platform designed for the specific needs of the Value PC and Internet Appliance market segments.


The VIA Apollo PM601 pairs the rich AGP graphics capabilities of the Trident Blade3D graphics engine with such advanced features as 133MHz Front Side Bus and 133MHz SDRAM support to deliver unrivaled flexibility and performance in an affordable yet highly-integrated chipset. With its flexible 66/100/133MHz FSB settings, the VIA Apollo PM601 is designed to optimize the performance of a full range of Intel® Pentium® III, Intel® Celeron™, and VIA Cyrix® III processors. Its support for PC133 SDRAM ensures ample memory bandwidth for the most demanding software and Internet applications at minimal additional cost. A wide range of additional integrated features provide OEMs and System Assemblers further flexibility for reducing the cost of building innovative Value PCs and Internet Appliances without sacrificing features and performance. These include an integrated 10/100 BaseT Ethernet controller, AC-97 audio, MC-97 modem, Super I/O, hardware monitoring capabilities, and support for four USB ports, ATA-100, and advanced power management.



VT8601



VT8231

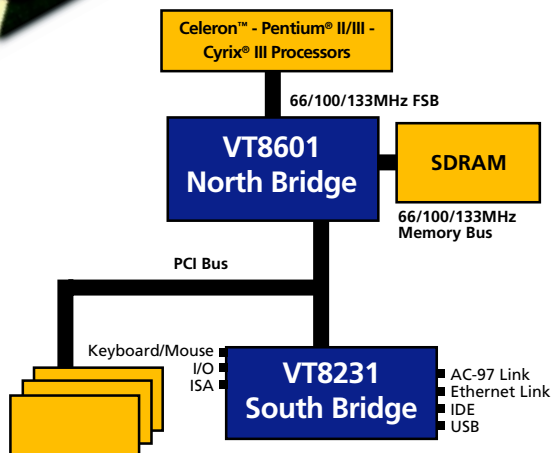

## Integrated North Bridge Architecture

### Processor Interface

2D/3D GUI  
DVD Video  
Compensator

PC Interface  
Controller

DRAM  
Controller

## Integrated South Bridge Architecture

IDE

PC Interface  
Controller

AC-97  
Audio/Modem

Super I/O

CPU  
Monitoring

Ethernet  
Controller

PM

KBC

RTC

SMB

# APOLLO PM601

## FEATURE COMPARISON

Features	VIA Apollo PM601	Intel 810E	Intel 810
North Bridge	VT8601	82810E	82810
Processor Support	Intel Celeron™ Pentium® II/III VIA Cyrix® III	Intel Celeron™ Pentium® II/III	Intel Celeron™ Pentium® II/III
Front Side Bus Settings	66/100/133MHz	66/100/133MHz	66/100MHz
Integrated 2D/3D	Trident Blade3D - AGP 2X	i752 - AGP 2X	i752 - AGP 2X
Memory Bus Setting	66/100/133MHz	66/100MHz	66/100MHz
Max. Memory	1.5GB	512MB	512MB
Memory Type	PC66/100/133 SDRAM VC SDRAM	PC66/100 SDRAM	PC66/100 SDRAM
South Bridge	VT8231	82801AA	82801AA
Integrated Audio/Modem	AC-97/MC-97	AC-97/MC-97	AC-97/MC-97
Integrated Network controller	10/100 Base-T Ethernet	N	N
Integrated IO / IOAPIC	Y/Y	N/Y	N/Y
IDE	ATA 33/66/100	ATA 33/66	ATA 33/66
USB	4 ports	2 ports	2 ports
Integrated Hardware Monitoring	Y	N	N
Power Management	ACPI/OnNow PMM	ACPI/OnNow PMM	ACPI/OnNow PMM

## BENEFITS OF APOLLO PM601

### Extremely cost effective platform

The VIA Apollo PM601's highly integrated design enables OEMs and system builders to offer extremely cost effective PCs by eliminating numerous previously discrete PC components.

### Flexible Front Side Bus settings optimized for both value and mainstream processors

The VIA Apollo PM601's 66/100/133MHz Front Side Bus is optimized for a full range of Intel® Celeron™, Intel® Pentium® III, and VIA Cyrix® III processors, allowing OEMs and system builders to choose the processor that best fits their target price point.

### Rich AGP graphics capabilities at minimal extra cost

Trident's compact, cost competitive Blade3D AGP engine was designed specifically for integrated chipsets to provide a rich graphical experience when surfing the web or running your favorite software applications.

### High-speed PC133 performance at minimal extra cost

PC133's 33% extra bandwidth comes with little or no price premium over PC100.

All trade names used herein are the property of their respective owners.

## FEATURES

- Supports Intel® Celeron™, Pentium® III, and VIA Cyrix® III processors
- 66/100/133MHz FSB settings
- Integrated Trident Blade3D AGP 2X graphics core
- Support for PC133 SDRAM as well as PC66/100 SDRAM and Virtual Channel memory
- Integrated AC-97, MC-97 Audio/Modem
- Integrated 10/100 Base-T Ethernet controller
- Integrated Super I/O and IOAPIC
- Support for ATA 33/66/100
- Support for CRT, LCD or TV display
- 4 USB ports, UHCI compliant
- Integrated hardware monitoring
- Advanced mobile power management features
- 510 BGA VT8601 North Bridge
- 352 BGA VT8231 South Bridge

### VIA Technologies, Inc.

Offices  
USA  
1045 Mission Ct.,  
Fremont, CA 94539  
USA  
tel: (510)683-3300  
fax: (510)683-3301

Taiwan, ROC  
8F, #533, Chung-cheng Rd.,  
Hsin Tien, Taipei,  
Taiwan, ROC  
tel: (886-2)2218-5452  
fax: (886-2)2218-5453  
email: mkt@via.com.tw

[www.viatech.com](http://www.viatech.com)

