

SATELLITE DISHES



DESCRIPTION


A wide range of models for collective or individual TV reception systems.

The parabolic reflectors are designed to achieve high gain, ensuring a high level of resistance to weather conditions.


Manufactured in aluminium with a polyester coating.

Mast or wall mounting.

Base for pole
PPA 220

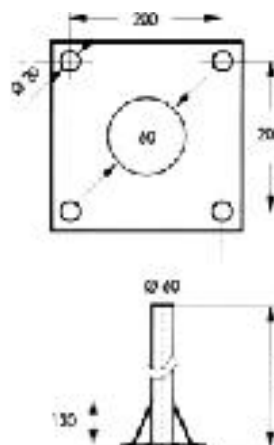

Wall-pole support
PPS 100

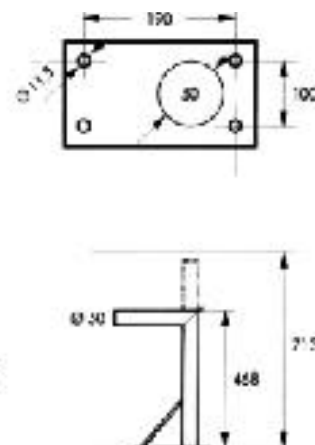

TECHNICAL SPECIFICATIONS

MODEL		PO 035	PO 063	PO 080	DPO 100*
Reference		86034	86063	86080	86103
Diameter	cm	35 x 38	63 x 69	80 x 86	100 x 106
Type of reflector		OFFSET			
Material		ALUMINIUM			
Coating		POLYESTER			
Type of fixing		Wall	Wall/Mast		Mast
Mast diameter	mm	40 ÷ 63			50 ÷ 62
Elevation	°<)	30 ÷ 55	0 ÷ 70	0 ÷ 70	5 ÷ 72
Offset angle	°<)	22,5			
Azimuth	°<)	180			
LNB fixing Ø	mm	23 ÷ 40			
Frequency range	GHz	10 ÷ 12,75			
Gain (11,7 GHz)	dB	32	36,5	38,5	41,60
Efficiency	%	>60			
Beam width (-3dB)	°<)	4,7	2,8	2,4	2,1
F/D relation		0,65	0,62	0,62	0,63
Wind speed	Maximum 160 Km/h	Kg	23	52	80
	Operating 100 Km/h	Kg	7	14	26
Packing dimensions	mm	435 x 410 x 143	750 x 660 x 150	940 x 875 x 185	1120 x 1055 x 195
Weight	Kg	2	5,4	8,4	13,4

* Pole not included. See accessories.

ACCESSORIES

MODEL	REFERENCE	DESCRIPTION
PPS 100	86101	Wall-pole support Ø 50 mm.
PPA 200	86104	Base for pole 200 x 200 mm. Ø 60 mm.
—	86033	Mast fixing adapter for PO 035