

Feature

- ◆ Designed to meet IEEE802.3u requirement.
- ◆ Primary inductance 350μH min. with 8mA DC Bias
- ◆ Designed for Level One's LXT974/975/980.
- ◆ Designed to meet IR 235°C peak requirement.

Specifications

Parameter	Condition	Min.	Typ.	Max	Unit
Inductance	Pin(39-40)&Pin(36-37)	350	*Note 1		μH
Turn Ratio	Pin(4-5) : (39-40)		2 : 1		
	Pin(1-2) : (36-37)		1 : 1		
Insertion Loss	@1-100MHz			-1.0	dB
Return Loss	@1-30MHz	-16			dB
	@30-60MHz		*Note 2		dB
	@60-80MHz	-10			dB
Cross Talk	@1-60MHz	-40			dB
	@60-100MHz	-38			dB
CMRR	@1-60MHz	-45/-40			dB
	@60-100MHz	-40/-35			dB
Voltage Isolation	1 minute	1500			Vrms

Note 1: measured at 8mA_{dc} over operating temperature 0~70°C

Note 2: Greater than 16-20 log(f/30 MHz)dB


Description

The PH406066 is a magnetic module that is specifically designed for the implementation of analog interface in Fast Ethernet application. With a minimum inductance of 350uH under all network operating conditions, the PH406066 minimize the baseline wander effect which can cause receiver error , particularly in less robust design , at long line length.


The PH406066 integrated high impedance common mode choke and will significantly suppress common mode and differential mode noise which may contribute to radiated and conducted emission.

The PH406066 provide high voltage isolation to protect against static charge on the twisted pair line.


Schematic

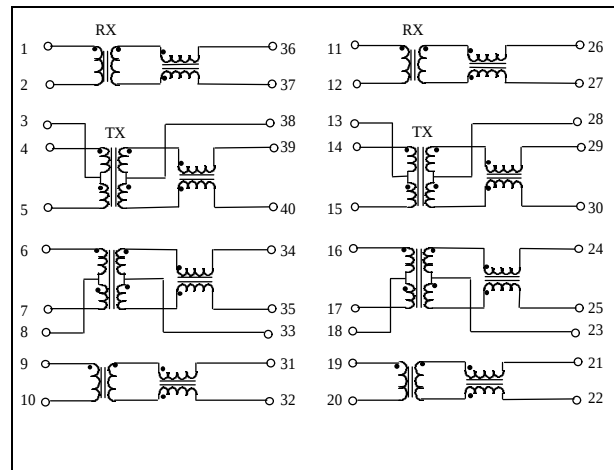


Typical Application

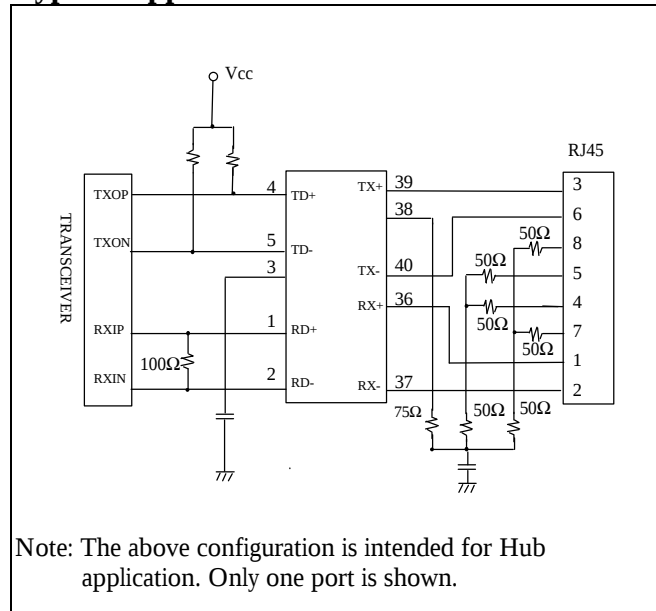


Dimension

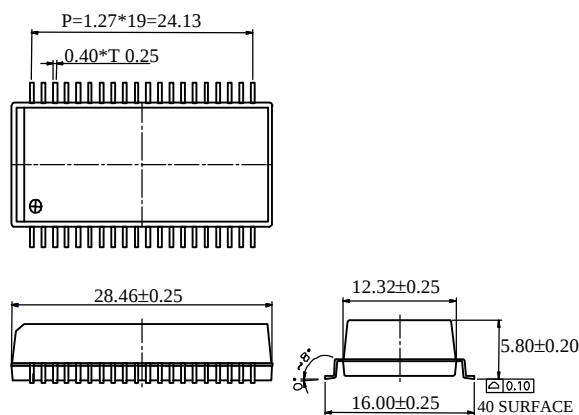

Reflow Soldering Profile

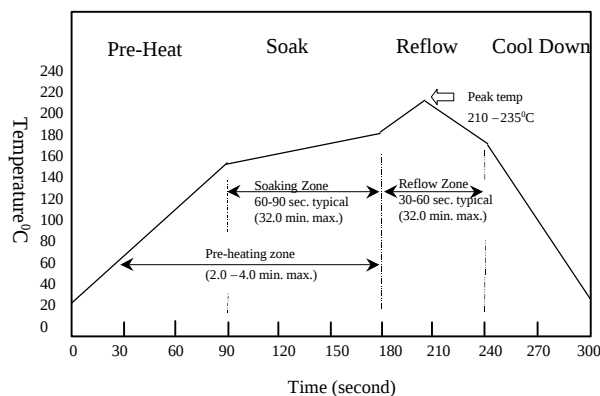

Tape & Reel Applications

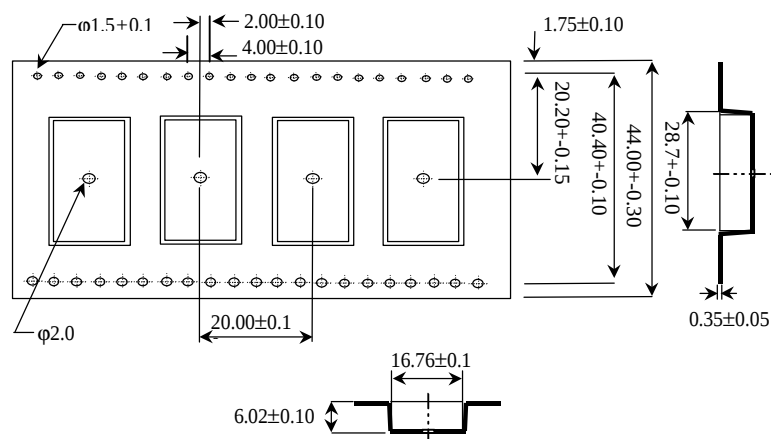

Weight 4.2 grams typ
 Tape & Reel ... 400 PCS/reel
 Tube16 PCS/tube

For more information

Headquarters

Taiwan :
 Tel: 886-7-7458587
 Fax: 886-7-7459120

Asia

Taiwan :
 Tel: 886-2-27962878
 Fax: 886-2-27912635
 Email: dennis@ycl.com.tw

USA

Santa Clara :
 Tel : (408)7273827
 Fax: (408)7273857
 Email: dennis@ycl.com.tw

EUROPE

Paris :
 Tel : (33)247443901
 Fax : (33)247447806
 Email: mab007@calva.net
 Email: brbsarl@aol.com