

ISDN-S interfaced Transformer

Model No.: PI163152

YCL


Feature:

1. Designed to meet CCITT I.430 requirements.
2. Designed to meet IR 235°C Peak requirement.


Specifications: At 25°C.

1. Primary Inductance(Lp): 22mH min @ 10Khz/200mV.
2. Leakage Inductance(LL): 5μH max. @ 10Khz/200mV.
3. DCR: Pri. = 3.0Ω max. Sec. = 5.0Ω max.
4. Cww: 110pF max.
5. Cd: 80pF max.
6. Isolation: 2,000Vrms min for 1minute.
7. Turn Ratio: 1CTS:2CTS

Dimension: mm(inch)±0.25(0.010)

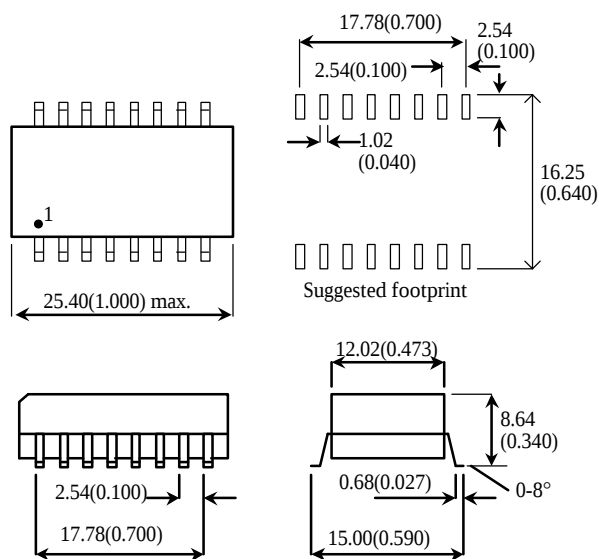

Schematic:

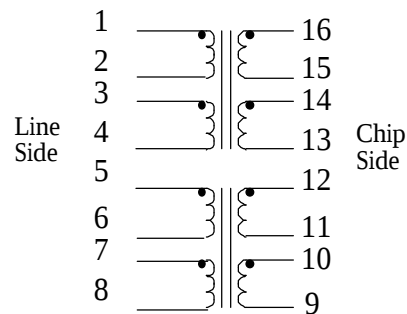

Co-Planarity: 0.100(0.004)typ.

Prepared: Frank Lee
Drawing no.: PI163152

Approved: Plank Wu
REV: 1

Date: Aug 28, 1998.
Page: 1 / 1