

ISDN-S interfaced Transformer

YCL

Model No.: PI163153


Feature:

Designed to meet CCITT I.430 requirements.
Designed to meet IR 235°C Peak requirement.


Specifications: At 25 degree C.

1. Primary Inductance(L_p): 22mH min @ 100Khz/200mV.
2. Leakage Inductance(L_L): 5 μ H max. @ 100Khz/200mV.
3. DCR: Pri. = 3.0 Ω max. Sec. = 6.5 Ω max.
4. Cww: 60pF max.
5. Cd: 120pF max.
6. Isolation: 2,000Vrms min for 1minute.
7. Turn Ratio: 1CTS:2.5CTS

Dimension: mm(inch) $\pm 0.25(0.010)$

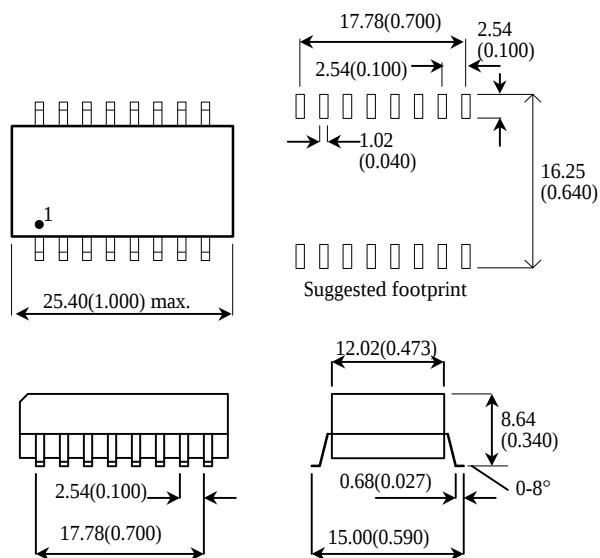

Schematic:

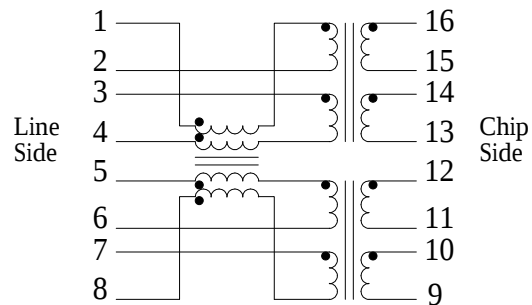

Co-Planarity: 0.100(0.004)typ.