

6 Pin SOIC Package

SIDACtor[®]
Solid State Overvoltage Protection

**Preliminary
Balanced
Line Protector
Pxxx3U_**

Features

- Balanced “Y” configuration (US Patent 4,905,119)
- 500A surge current rating meets all GR1089 and FCC Part 68 surge immunity requirements
- Meets UL and IEC 60950 Creepage and Clearance requirements
- Utilizes patented ion implant technology (US Patent 5,479,031) for peerless performance
- Glass passivated for superior reliability




Description

Teccor's new Balanced Protector is designed to offer Teccor customers a surface mount alternative to our traditional modified TO-220 package. Based on a 6-pin SOIC package, Teccor's Balanced Protector is built using Teccor's patented "Y" (US Patent 4,905,119) configuration and is available in surge current ratings of up to 500A.

Available in standard or custom voltage configurations, Teccor's Balanced Protector can help provide a simple solution for complex regulatory requirements.

Example Circuit

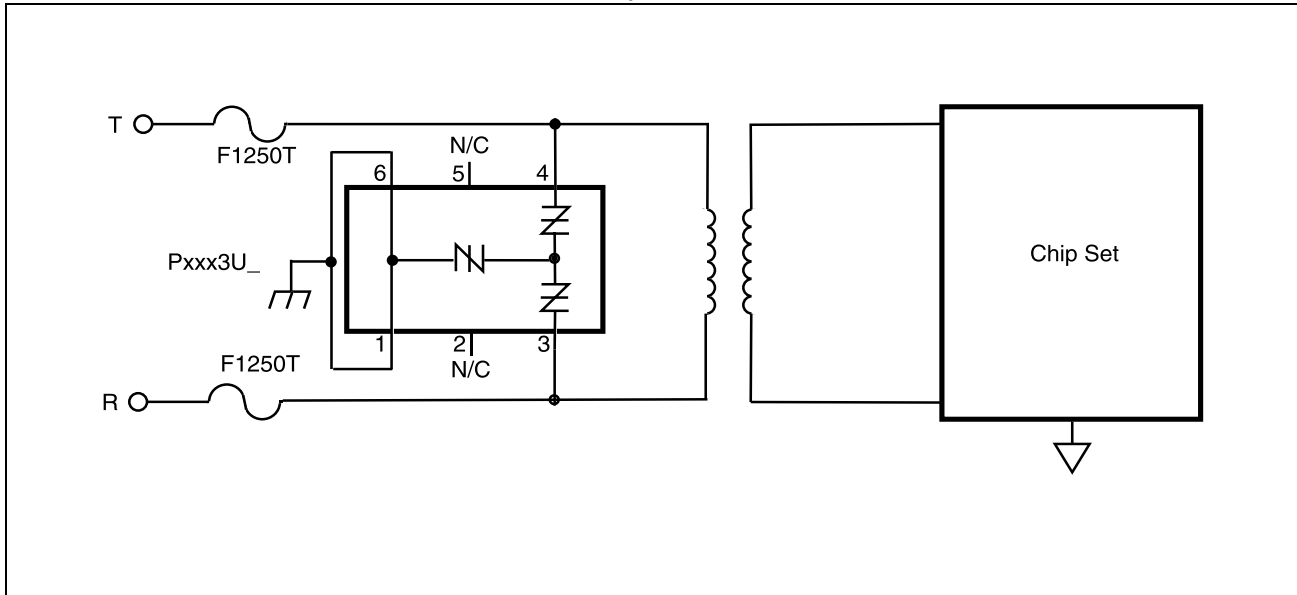

Electrical Specifications

Pxxx3U_

Part Number	V _{DRM} Volts	V _S Volts	V _T Volts	I _{DRM} μ Amps	I _S mAmps	I _T Amps	I _H mAmps	C _O pF
P1553U_	130	180	10	5	800	1	120	40
P1803U_	150	210	10	5	800	1	120	40
P2103U_	170	250	10	5	800	1	120	40
P2353U_	200	270	10	5	800	1	120	40
P2703U_	230	300	10	5	800	1	120	30
P3203U_	270	350	10	5	800	1	120	30
P3403U_	300	400	10	5	800	1	120	30
P5103U_	420	600	10	5	800	1	120	30

Notes:

- V_{DRM} and V_S ratings are between Tip, Ring and Ground
- V_{DRM} is measured at I_{DRM} and V_S is measured at 100V/ μ s
- Isolation between unused opposing pins (e.g. 1 to 6) is $\geq 1600V_{RMS}$
- Special voltage ratings (V_S & V_{DRM}), configurations, and holding currents (I_H) are available upon request
- Thermal resistance: junction to ambient is 85°C/W
- C_O is for A and B rated components. C_O for C rated components is 2x listed value


Surge Ratings

Series	I_{PP} 2x10 μ s Amps	I_{PP} 8x20 μ s Amps	I_{PP} 10x160 μ s Amps	I_{PP} 10x560 μ s Amps	I_{PP} 10x1000 μ s Amps	I_{TSM} 60Hz Amps	di/dt Amps/ μ s
A	200	150	100	60	50	20	500
B	250	250	150	100	80	30	500
C	500	400	200	150	100	50	500


Notes:

- Surge ratings apply from -40°C to +80°C
- Surge ratings are repetitive and are guaranteed for the life of the product


V-I Characteristics

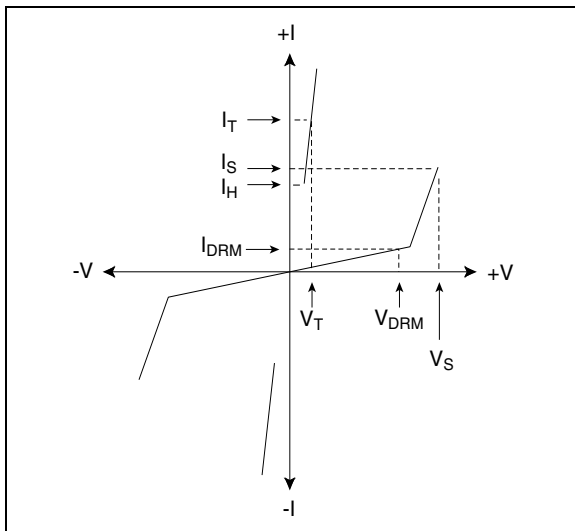


t_r, t_d Pulse Wave-form

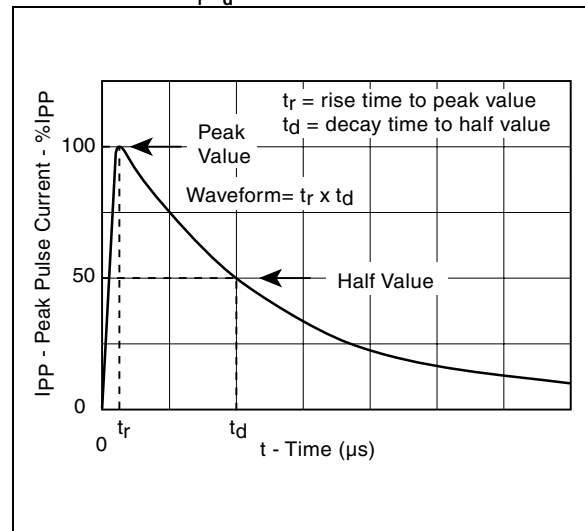


Normalized V_S Change vs.
Junction Temperature

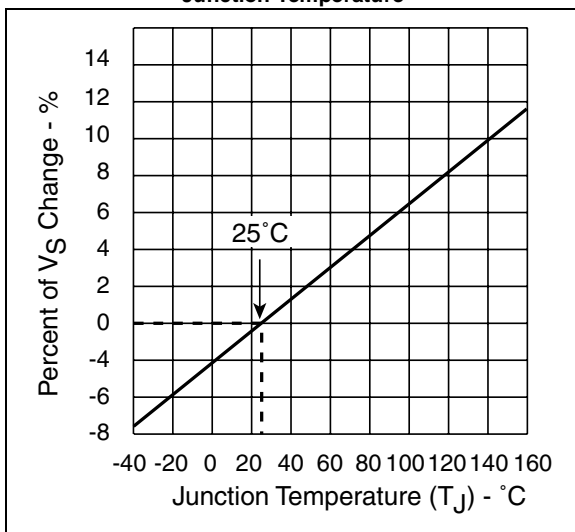


Normalized DC Holding Current vs.
Case Temperature

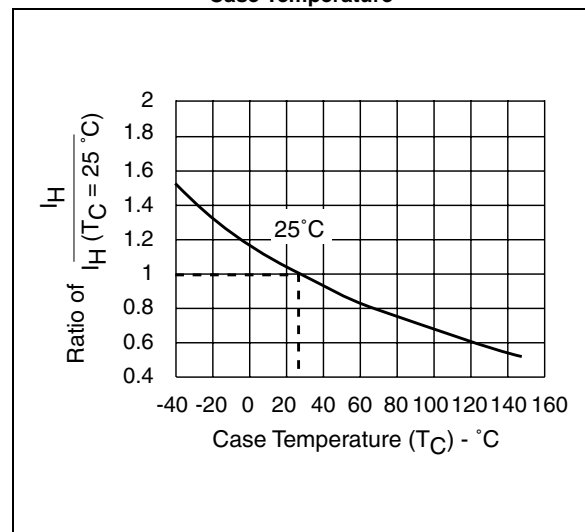


Package and Layout Dimensions

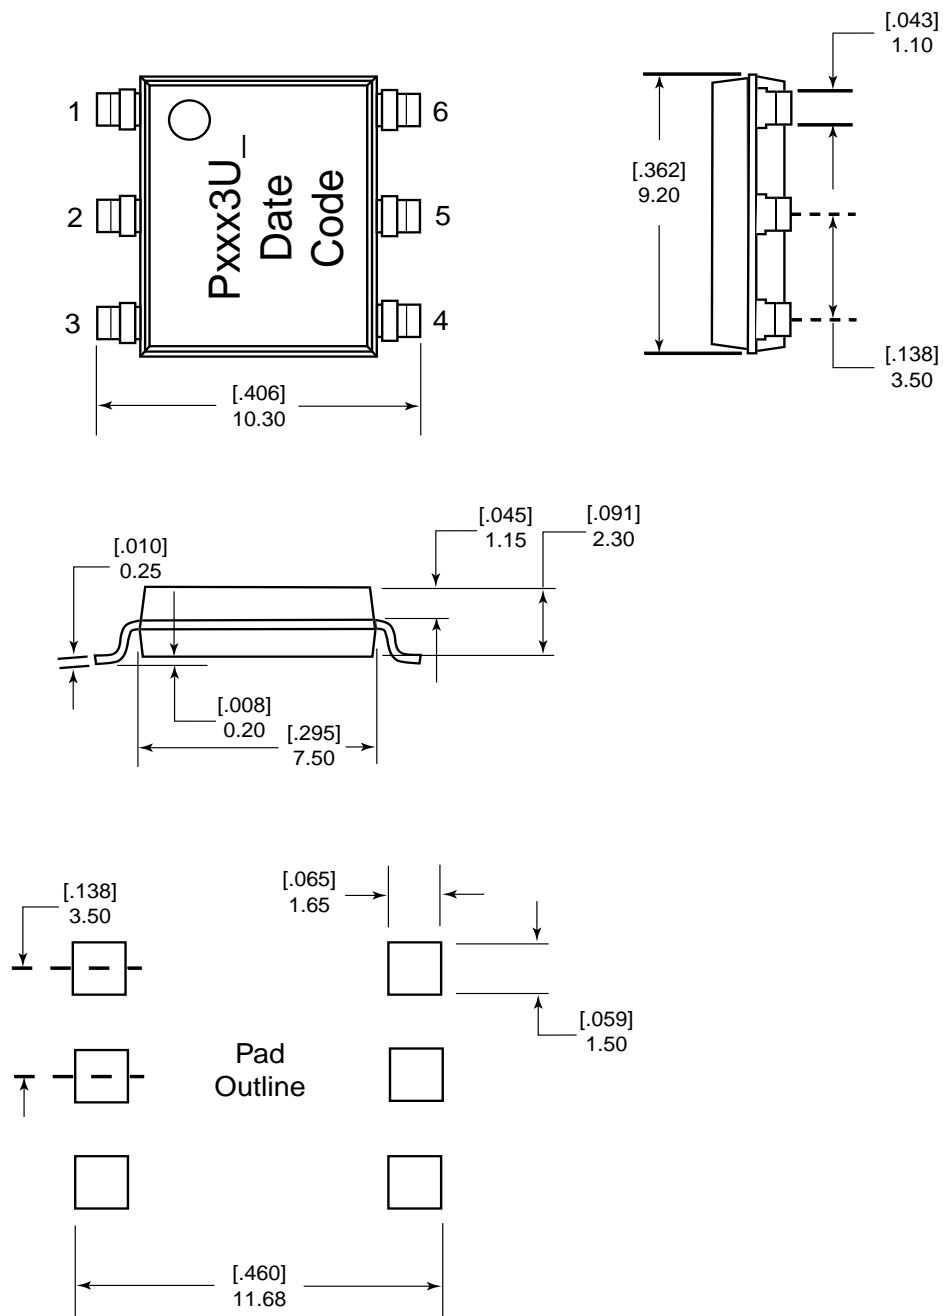

Tape and Reel Packing Specifications

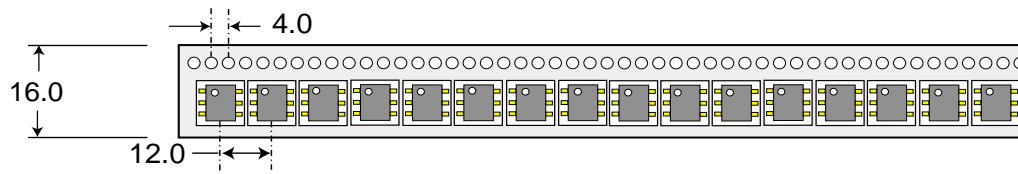

Dimensions
are in mm

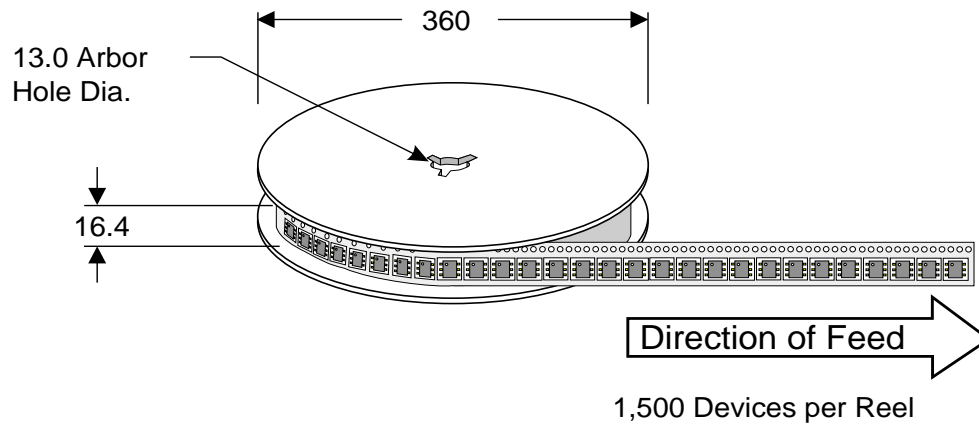

TECCOR ELECTRONICS

1800 Hurd Drive
Irving, Texas 75038-4385
United States of America

Phone: +1 972-580-7777

Fax: +1 972-550-1309

Web site: <http://www.teccor.com>

E-mail: sidactor.techsales@teccor.com

Please contact the factory for further information.

Data Sheet: Pxxx3U_ - 051401

Teccor Electronics is the proprietor of the trademarks
SIDACtor®, Batrax®, and TeleLink®.

Teccor Electronics SIDACtor® TVS product is covered
by these and other U.S. Patents: 4,685,120 - 4,827,497
- 4,905,119 - 5,479,031 - 5,516,705

An Invensys company