




OUTLINE DIMENSION & BLOCK DIAGRAM

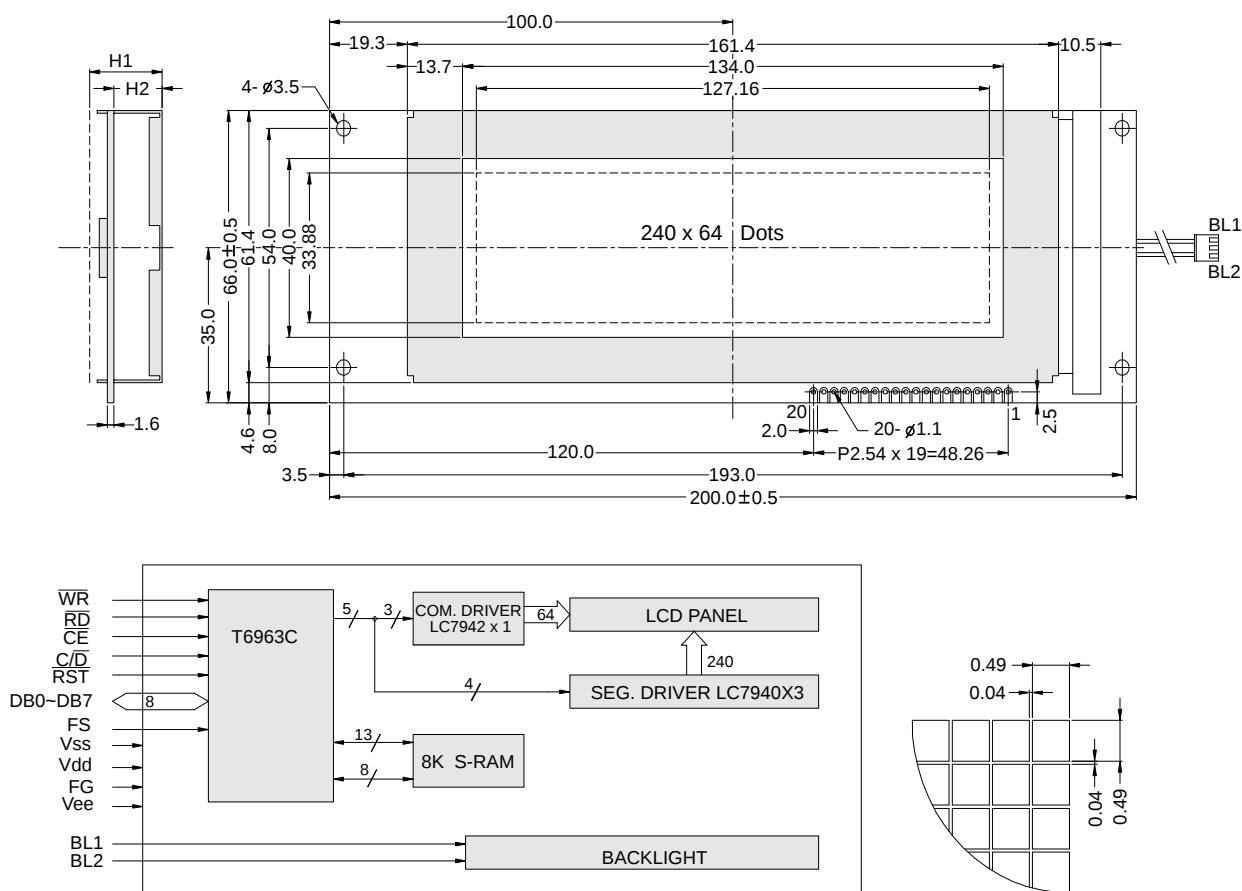

The tolerance unless classified ± 0.3mm

MECHANICAL SPECIFICATION

Overall Size	200.0 x 66.0	Module	H2 / H1
View Area	134.0 x 40.4	W / O B/L	- / -
Dot Size	0.49 x 0.49	EL B/L	- / -
Dot Pitch	0.53 x 0.53	CCFL B/L	16.0 / 23.0

PIN ASSIGNMENT

Pin no.	Symbol	Function
1	FG	Frame ground
2	Vss	Power supply(GND)
3	Vdd	Power supply(+)
4	Vee	Negative voltage input
5	WR	Data write
6	RD	Data read
7	CE	Chip enable
8	C/D	Command / data select
10	RST	Reaet
11-18	DB0-DB7	Data bus line
19	FS	Font select
9/20	NC	No Connection

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7.0	V
LCD driving supply voltage	Vdd-Vee	25°C	0	22.0	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typical	Max.	Units
Power supply voltage	Vdd-Vss	25°C	4.5	—	5.5	V
LCD operation voltage	Vop	Top	N	W	N	W
		-10°C	—	14.3	—	15.1
		0°C	—	—	—	—
		25°C	—	13.2	—	14.0
		50°C	—	—	—	—
		60°C	—	12.0	—	12.8
LCM current consumption (No B/L)	Idd	Vdd=5V	—	10	—	mA
Backlight current consumption	LED/edge	VB/L=4.2V	—	—	—	mA
	LED/array	VB/L=4.2V	—	—	—	mA

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED,EL Backlight feature, other Specs not available on catalog is under request.

