



1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Features :

- Fast response time
- High photo sensitivity
- Small junction capacitance

■ Description :

- PD28-21B/L68/F8 is a high speed and high sensitive PIN photodiode miniature SMD package which is molded in a black plastic with flat top view lens. The device is spectrally matched to infrared emitting diode.

■ Applications :


- High speed photo detector
- Copier
- Camera
- Optoelectronic switch
- Infrared applied system

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PD	Silicon	Black

1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Package Dimensions :

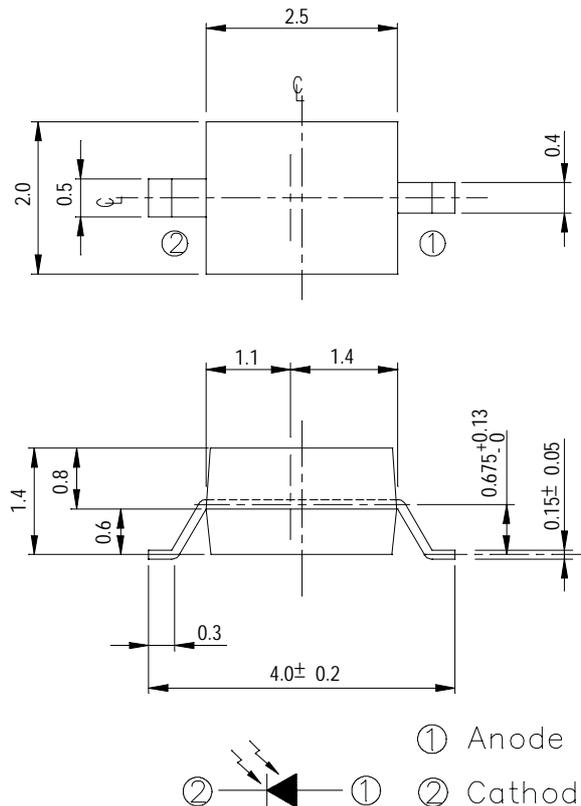

■ Notes :

1. All dimensions are in millimeter.
2. General Tolerance: $\pm 0.1\text{mm}$
3. Lens color : Black .
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
6. When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Absolute Maximum Ratings at T_A = 25°C

Parameter	Symbol	Rating	Unit	Notice
Reverse Voltage	V _R	32	V	
Operating Temperature	T _{opr}	-25 ~ +85	°C	
Storage Temperature	T _{stg}	-40 ~ +85	°C	
Lead Soldering Temperature	T _{sol}	260	°C	
Power Dissipation at(or below) 25°C Free Air Temperature	P _c	150	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Rang of Spectral Bandwidth	λ _{0.5}	----	730-1200	----	nm	----
Wavelength of Peak Sensitivity	λ _p	----	980	----	nm	----
Open-Circuit Voltage	V _{OC}	----	0.42	----	V	E _e =5mW/cm ² λ _p =940nm
Short- Circuit Current	I _{SC}	----	1.5	----	μA	
Reverse Light Current	I _L	----	1.5	----	μA	E _e =1mW/cm ² λ _p =940nm V _R =5V
Dark Current	I _D	----	----	10	nA	E _e =0mW/cm ² V _R =10V
Reverse Breakdown Voltage	B _{VR}	32	170	----	V	E _e =0mW/cm ² I _R =100 μA
Total Capacitance	C _t	----	5	----	pF	E _e =0mW/cm ² f=1MHZ V _R =5V
Rise Time	t _r	----	6	----	nS	R _L =1000Ω V _R =10V
Fall Time	t _f	----	6	----		



1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Typical Electrical/Optical/Characteristics Curves :

Fig. 1 Power Dissipation vs. Ambient Temperature

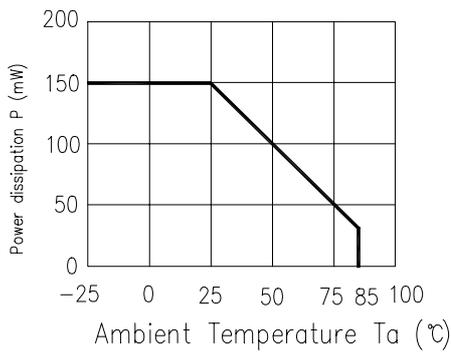


Fig.2 Spectral Sensitivity

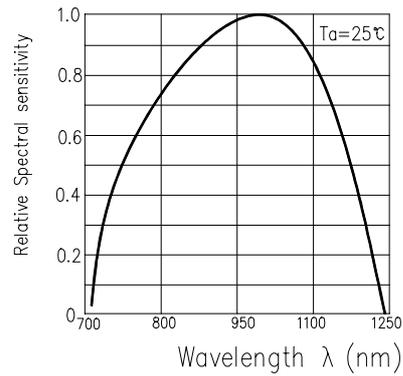


Fig.3 Dark Current vs. Ambient Temperature

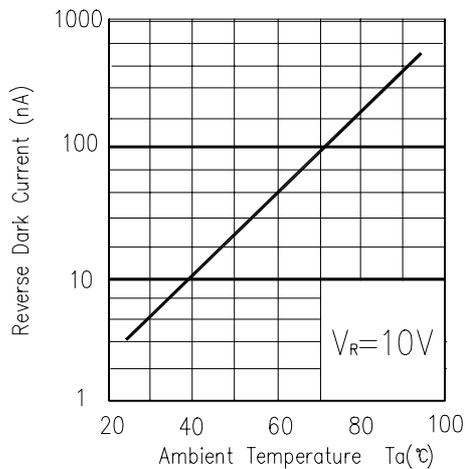


Fig.4 Reverse Light Current vs. E_e

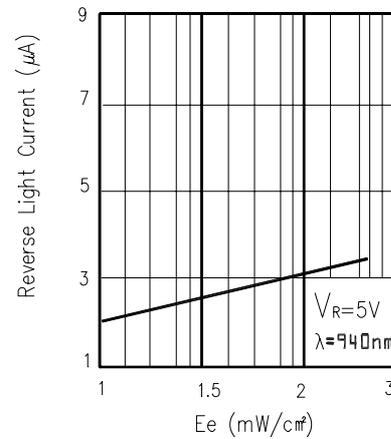


Fig.5 Terminal Capacitance vs. Reverse Voltage


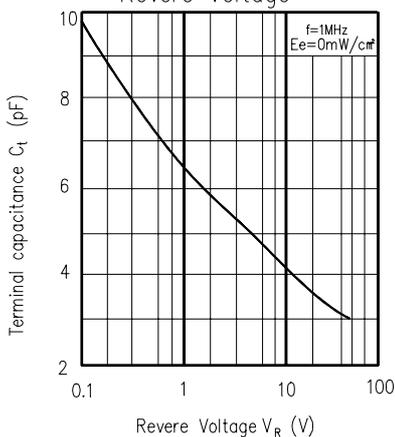


Fig.6 Responce Time vs. Load Resistance



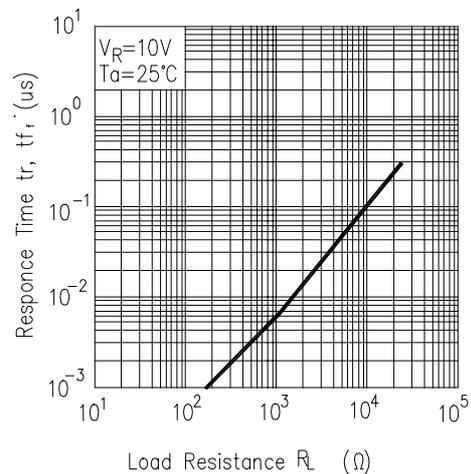

1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10secs	22 pcs		0/1
2	Temperature Cycle	H : +85°C 30 min  L : -55°C 30 min	50 cycle	22 pcs	$I_L \leq L \times 0.8$ L:Lower specification limit	0/1
3	Thermal Shock	H : +100°C 5 min  L : -10°C 5 min	50 cycle	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	$V_R=5V$	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1


1.3mm Axial Flat Top PIN Photodiode

MODEL NO : PD28-21B/L68/F8

■ Test Method For Reverse Light Current

Condition: $E_e=1\text{mW}/\text{cm}^2$, $V_R=5\text{V}$

Test Item: Reverse Light Current (Unit: μA)

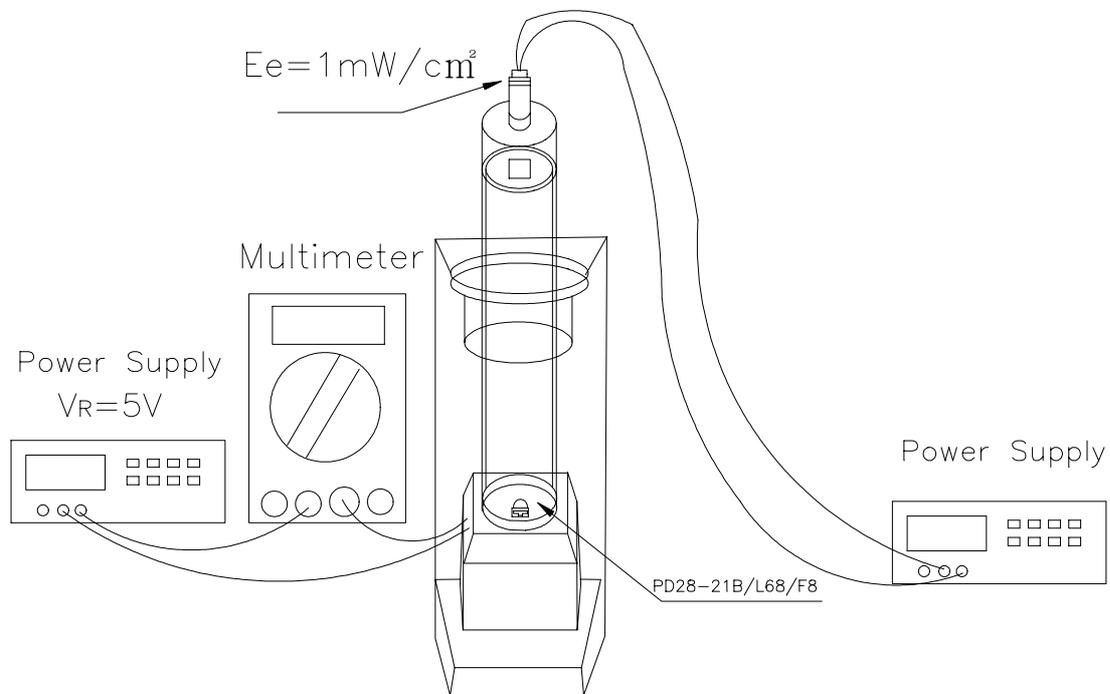




DEVICE NUMBER : DPD-028-079 REV : 1.0
ECN : _____ PAGE : 7/7

1.3mm Axial Flat Top PIN Photodiode


MODEL NO : PD28-21B/L68/F8

■ Packing Specifications


1. Bag

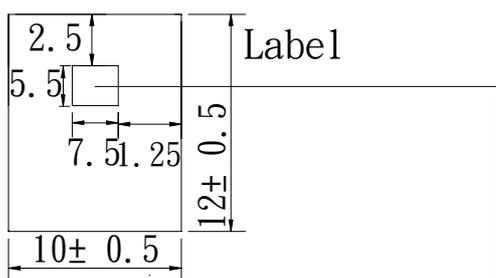

2. Box

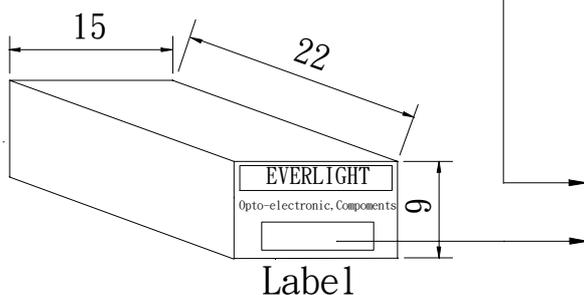

3. Carton

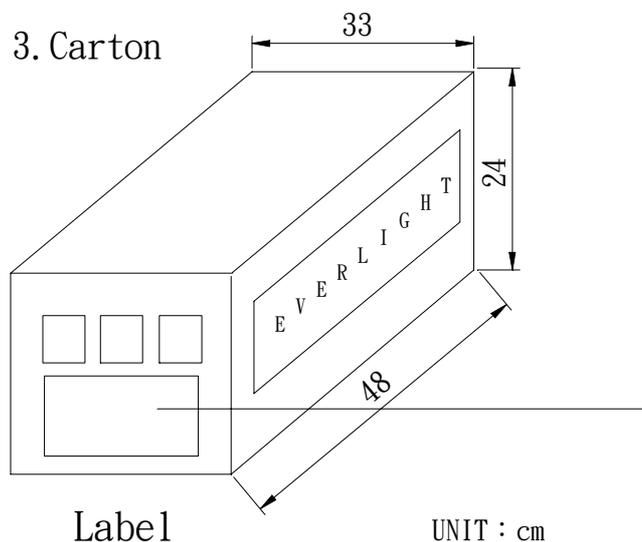

UNIT : cm



CPN:

P/N:



PD28-21B/L68/F8

QTY:



LOT NO:

CAT:

HUE:

REF:

MADE IN TAIWAN

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

1. 1000 Pcs/1Volume , 1Volume/1Bag

2. 10Bags/1Carton