

### Product Features

- Maximum rated frequency: 133 MHz
- Low cycle-to-cycle jitter
- Input to output delay, less than 200ps
- Internal feedback allows outputs to be synchronized to the clock input
- 5V tolerant input\*
- Operates at 3.3V  $V_{DD}$
- Space-saving Packages:  
150-mil SOIC (W)  
173-mil TSSOP (L)

\* CLKIN must reference the same voltage thresholds for the PLL to deliver zero delay skewing


### Functional Description

The PI6C240x is a PLL based, zero-delay buffer, with the ability to distribute five outputs on PI6C2405, nine outputs on PI6C2409 of up to 133MHz at 3.3V. All the outputs are distributed from a single clock input CLKIN and output OUT0 performs zero delay by connecting a feedback to PLL.


PI6C2409 has two banks of four outputs that can be controlled by the selection inputs, SEL1 & SEL2. It also has a powersparing feature: when input SEL1 is 0 and SEL2 is 1, PLL is turned off and all outputs are referenced from CLKIN. PI6C2405 is an 8-pin version of PI6C2409 without selection inputs. PI6C240X is available in high drive and industrial environment versions.

An internal feedback on OUT0 is used to synchronize the outputs to the input; the relationship between loading of this signal and the outputs determines the input-output delay. PI6C240X are characterized for both commercial and industrial operation


### Block Diagram: PI6C2409

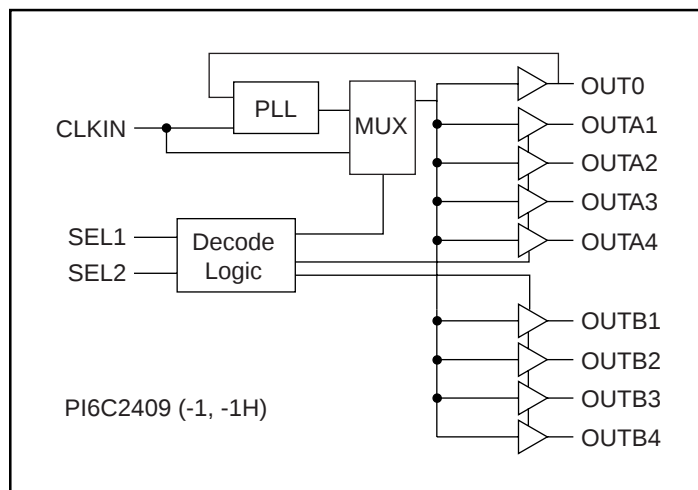


### Pin Configuration PI6C2409

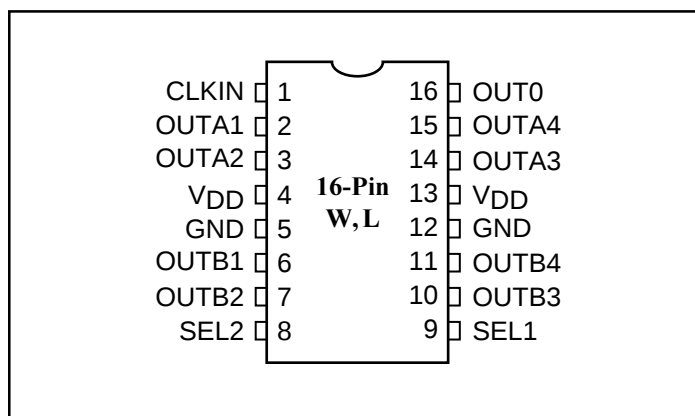

### Block Diagram: PI6C2405

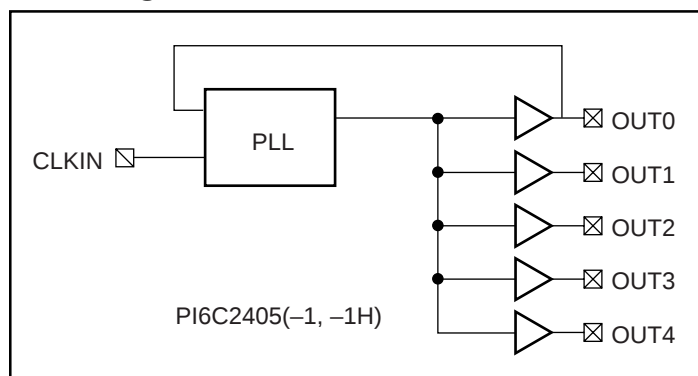

### Pin Configuration: PI6C2405

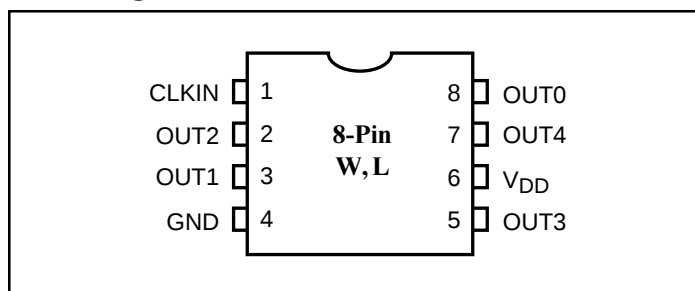

### Input Select Decoding for PI6C2409

| SEL2 | SEL1 | OUTA [1-4] | OUTB [1-4] | Output Source (OUT0) | PLL |
|------|------|------------|------------|----------------------|-----|
| 0    | 0    | 3-State    | 3-State    | PLL                  | ON  |
| 0    | 1    | PLL        | 3-State    | PLL                  | ON  |
| 1    | 0    | CLKIN      | CLKIN      | CLKIN                | OFF |
| 1    | 1    | PLL        | PLL        | PLL                  | ON  |

### Pin Description for PI6C2409


| Pin          | Signal          | Description                                           |
|--------------|-----------------|-------------------------------------------------------|
| 1            | CLKIN           | Input clock reference frequency (weak pull-down)      |
| 2, 3, 14, 15 | OUTA[1-4]       | Clock outputs, Bank A (weak pull-down)                |
| 4, 13        | V <sub>DD</sub> | 3.3V supply                                           |
| 5, 12        | GND             | Ground                                                |
| 6, 7, 10, 11 | OUTB[1-4]       | Clock outputs, Bank B (weak pull-down)                |
| 8            | SEL2            | Select input, bit 2 (weak pull-up)                    |
| 9            | SEL1            | Select input, bit 1 (weak pull-up)                    |
| 16           | OUT0            | Clock Output , internal PLL feedback (weak pull-down) |

### Pin Description for PI6C2305

| Pin        | Signal          | Description                                          |
|------------|-----------------|------------------------------------------------------|
| 1          | CLKIN           | Input clock reference frequency (weak pull-down)     |
| 2, 3, 5, 7 | OUT[1-4]        | Clock outputs, (weak pull-down)                      |
| 4          | GND             | 3.3V supply                                          |
| 6          | V <sub>DD</sub> | Ground                                               |
| 8          | OUT0            | Clock output, internal PLL feedback (weak pull-down) |

### Zero Delay and Skew Control

CLKIN Input to OUTx Delay vs. Difference in Loading between OUT0 pin and OUTx pins

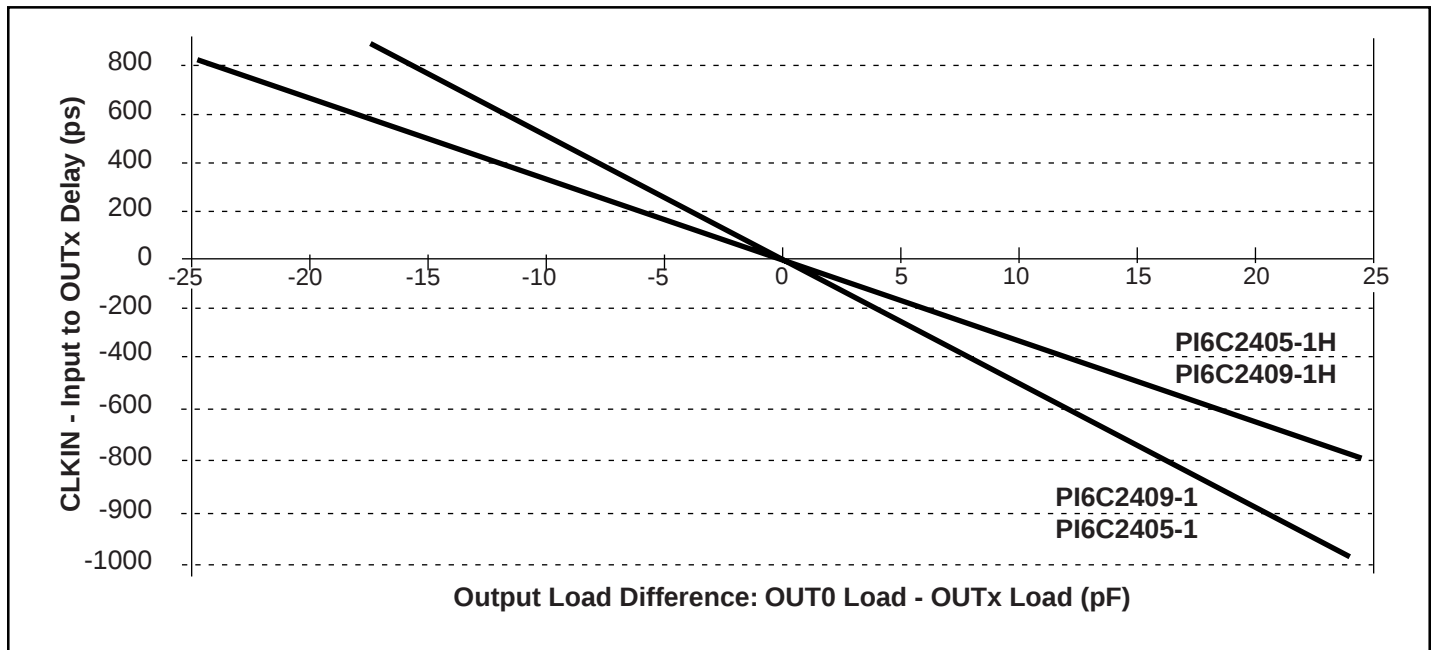

The relationship between loading of the OUT0 signal and other outputs determines the input-output delay. Zero delay is achieved when all outputs, including feedback, are loaded equally.

### Maximum Ratings

|                                                               |                          |
|---------------------------------------------------------------|--------------------------|
| Supply Voltage to Ground Potential .....                      | -0.5V to +7.0V           |
| DC Input Voltage (Except CLKIN) .....                         | -0.5V to $V_{DD} + 0.5V$ |
| DC Input Voltage CLKIN .....                                  | -0.5 to 7V               |
| Storage Temperature .....                                     | -65°C to +150°C          |
| Maximum Soldering Temperature (10 seconds) .....              | 260°C                    |
| Junction Temperature .....                                    | 150°C                    |
| Static Discharge Voltage (per MIL-STD-883, Method 3015) ..... | >2000V                   |

### Operating Conditions ( $V_{CC} = 3.3V \pm 0.3V$ )

| Parameter | Description                               | Min. | Max. | Units |
|-----------|-------------------------------------------|------|------|-------|
| $V_{DD}$  | Supply Voltage                            | 3.0  | 3.6  | V     |
| $T_A$     | Commerical Operating Temperature          | 0    | 70   | °C    |
|           | Industrial Operating Temperature          | -40  | 85   |       |
| $C_L$     | Load Capacitance, below 100 MHz           | —    | 30   | pF    |
|           | Load Capacitance, from 100 MHz to 133 MHz | —    | 15   |       |
| $C_{IN}$  | Input Capacitance                         | —    | 7    |       |

**DC Electrical Characteristics for Industrial Temperature Devices**

| Parameter                  | Description         | Test Conditions                                                   | Min. | Max.  | Units |
|----------------------------|---------------------|-------------------------------------------------------------------|------|-------|-------|
| V <sub>IL</sub>            | Input LOW Voltage   |                                                                   |      | 0.8   | V     |
| V <sub>IH</sub>            | Input HIGH Voltage  |                                                                   | 2.0  |       |       |
| I <sub>IL</sub>            | Input LOW Current   | V <sub>IN</sub> = 0V                                              |      | 50.0  | μA    |
| I <sub>IH</sub>            | Input HIGH Current  | V <sub>IN</sub> = V <sub>DD</sub>                                 |      | 100.0 |       |
| V <sub>OL</sub>            | Output LOW Voltage  | I <sub>OL</sub> = 8mA (–1); I <sub>OL</sub> = 12mA (–1H)          |      | 0.4   | V     |
| V <sub>OH</sub>            | Output HIGH Voltage | I <sub>OH</sub> = –8mA (–1); I <sub>OH</sub> = –12mA (–1H)        | 2.4  |       |       |
| I <sub>DD</sub> (PI6C2309) | Bypass, PLL OFF     | SEL1 = 0, SEL2 = 1                                                |      | 25.0  | μA    |
| I <sub>DD</sub>            | Supply Current      | Unloaded outputs 100 MHz, Select inputs at V <sub>DD</sub> or GND |      | 54.0  | mA    |
|                            |                     | Unloaded outputs 66 MHz, CLKIN                                    |      | 39.0  |       |

**AC Electrical Characteristics for Industrial Temperature Devices**

| Parameters         | Name                                                           | Test Conditions                                                      | Min. | Typ. | Max. | Units |
|--------------------|----------------------------------------------------------------|----------------------------------------------------------------------|------|------|------|-------|
| F <sub>O</sub>     | Output Frequency                                               | 30pF load (–1, –1H)                                                  | 10.0 |      | 100  | MHz   |
|                    |                                                                | 20pF load, (–1H)                                                     |      |      | 133  |       |
|                    |                                                                | 15pF load, (–1, –1H)                                                 |      |      |      |       |
| t <sub>DC</sub>    | Duty Cycle <sup>(1)</sup><br>(–1 )                             | Measured at V <sub>DD</sub> /2, F <sub>OUT</sub> <66.67MHz 30pF load | 40.0 | 50   | 60.0 | %     |
|                    |                                                                | Measured at V <sub>DD</sub> /2, F <sub>OUT</sub> <45MHz 15pF load    | 45.0 |      | 55.0 |       |
|                    | Duty Cycle <sup>(1)</sup> (–1H)                                | Measured at V <sub>DD</sub> /2, F <sub>OUT</sub> <133MHz 15pF load   | 40.0 |      | 60.0 |       |
|                    |                                                                | Measured at V <sub>DD</sub> /2V, F <sub>OUT</sub> <45MHz 30pF load   | 45.0 |      | 55.0 |       |
| t <sub>R</sub>     | Rise Time <sup>(1)</sup> (–1, –2, –3, –4,)                     | Measured between 0.8V and 2.0V, 30pF load                            |      |      | 2.2  | ns    |
|                    |                                                                | Measured between 0.8V and 2.0V, 15pF load                            |      |      | 1.50 |       |
|                    | Rise Time <sup>(1)</sup> (–1H)                                 | Measured between 0.8V and 2.0V, 30pF load                            |      |      | 1.50 |       |
| t <sub>F</sub>     | Fall Time <sup>(1)</sup> (–1)                                  | Measured between 0.8V and 2.0V, 30pF load                            |      |      | 2.50 |       |
|                    |                                                                | Measured between 0.8V and 2.0V, 15pF load                            |      |      | 1.50 |       |
|                    | Fall Time <sup>(1)</sup> (–1H)                                 | Measured between 0.8V and 2.0V, 30pF load                            |      |      | 1.25 |       |
| t <sub>SK(O)</sub> | Output to Output Skew<br>(–1, –1H) <sup>(1)</sup>              | All outputs equally loaded                                           |      |      | 200  | ps    |
| t <sub>0</sub>     | Delay, CLKIN Rising Edge<br>to OUT0 Rising Edge <sup>(1)</sup> | Measured at V <sub>DD</sub> /2                                       |      | 0    | ±200 |       |
| t <sub>SK(D)</sub> | Device-to-Device Skew <sup>(1)</sup>                           | Measured at V <sub>DD</sub> /2 on OUT0 pins of devices               |      | 0    | 600  |       |
| t <sub>SLEW</sub>  | Output Slew Rate <sup>(1)</sup>                                | Measured between 0.8V & 2.0V on –1H device<br>using Test Crt #2      | 1    |      |      | V/ns  |
| t <sub>JIT</sub>   | Cycle-to-Cycle Jitter <sup>(1)</sup><br>(–1, –1H)              | Measured at 66.67 MHz, loaded 30pF load                              |      |      | 200  | ps    |
|                    |                                                                | Measured at 133 MHz, loaded 15pF load                                |      |      | 100  |       |
| t <sub>LOCK</sub>  | PLL Lock Time <sup>(1)</sup>                                   | Stable power supply, valid clocks<br>presented on CLKIN pin          |      |      | 1.0  | ms    |

**Notes:** 1. See Switching Waveforms on page 6.

### DC Electrical Characteristics for Commercial Temperature Devices

| Parameter                  | Description         | Test Conditions                                                      | Min. | Max. | Units |
|----------------------------|---------------------|----------------------------------------------------------------------|------|------|-------|
| V <sub>IL</sub>            | Input LOW Voltage   | —                                                                    | —    | 0.8  | V     |
| V <sub>IH</sub>            | Input HIGH Voltage  | —                                                                    | 2.0  | —    |       |
| I <sub>IL</sub>            | Input LOW Current   | V <sub>IN</sub> = 0V                                                 | —    | 50   | μA    |
| I <sub>IH</sub>            | Input HIGH Current  | V <sub>IN</sub> = V <sub>DD</sub>                                    | —    | 100  |       |
| V <sub>OL</sub>            | Output LOW Voltage  | I <sub>OL</sub> = 8mA (–1); I <sub>OL</sub> = 12mA (–1H)             | —    | 0.4  | V     |
| V <sub>OH</sub>            | Output HIGH Voltage | I <sub>OH</sub> = –8mA (–1); I <sub>OH</sub> = –12mA (–1H)           | 2.4  | —    |       |
| I <sub>DD</sub> (PI6C2309) | Bypass, PLL off     | SEL1 = 0 SEL2 = 1                                                    | —    | 25   | μA    |
| I <sub>DD</sub>            | Supply Current      | Unloaded outputs, 66.67 MHz, Select inputs at V <sub>DD</sub> or GND | —    | 39   | mA    |
| I <sub>DD</sub>            | Supply Current      | Unloaded outputs 100 MHz Select Inputs @ V <sub>DD</sub> or GND      | —    | 54   |       |

### AC Electrical Characteristics for Commercial Temperature Device


| Parameters         | Name                                                                        | Test Conditions                                                    | Min. | Typ. | Max. | Units |
|--------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------|------|------|------|-------|
| F <sub>O</sub>     | Output Frequency                                                            | 30pF load (–1, –1H)                                                | 10   |      | 100  | MHz   |
|                    |                                                                             | 20pF load, (–1H)                                                   |      |      | 133  |       |
|                    |                                                                             | 15pF load, (–1, –1H)                                               |      |      |      |       |
| t <sub>DC</sub>    | Duty Cycle <sup>(1)</sup> (–1H)                                             | Measured at V <sub>DD</sub> /2, F <sub>O</sub> < 66MHz, 30pF       | 45   | 50   | 55   | %     |
|                    | Duty Cycle (–1)                                                             | Measured at V <sub>DD</sub> /2, F <sub>O</sub> < 66MHz, 30pF       | 40   | 50   | 60   |       |
| t <sub>R</sub>     | Rise Time <sup>(1)</sup> @30pF                                              | Measured between 0.8V and 2.0V                                     |      |      | 2.2  | ns    |
|                    | Rise Time <sup>(1)</sup> @15pF                                              |                                                                    |      |      | 1.5  |       |
|                    | Rise Time <sup>(1)</sup> @30pF (–1H)                                        |                                                                    |      |      | 1.5  |       |
| t <sub>F</sub>     | Fall Time <sup>(1)</sup> @30pF                                              |                                                                    |      |      | 2.2  |       |
|                    | Fall Time <sup>(1)</sup> @15pF                                              |                                                                    |      |      | 1.5  |       |
|                    | Fall Time <sup>(1)</sup> @30pF (–1H)                                        |                                                                    |      |      | 1.25 |       |
| t <sub>SK(O)</sub> | Output to Output Skew <sup>(1)</sup> (–1, –1H)                              | All outputs equally loaded, V <sub>DD</sub> /2                     |      |      | 200  | ps    |
| t <sub>0</sub>     | Input to Output Delay, CLKIN Rising Edge to OUT0 Rising Edge <sup>(1)</sup> | Measured at V <sub>DD</sub> /2                                     |      | 0    | ±200 |       |
| t <sub>SK(D)</sub> | Device to Device Skew <sup>(1)</sup>                                        | Measured at V <sub>DD</sub> /2 on OUT0 pins of devices             |      | 0    | 600  |       |
| t <sub>SLEW</sub>  | Output Slew Rate <sup>(1)</sup>                                             | Measured between 0.8V and 2.0V on –1H device using Test Circuit #2 | 1    |      |      | V/ns  |
| t <sub>JIT</sub>   | Cycle-to-Cycle Jitter <sup>(1)</sup> (–1, –1H)                              | Measured at 66.67 MHz, loaded 30pF outputs                         |      |      | 200  | ps    |
|                    |                                                                             | Measured at 133 MHz, loaded 15pF outputs                           |      |      | 100  |       |
| t <sub>LOCK</sub>  | PLL Lock Time <sup>(1)</sup>                                                | Stable power supply, valid clocks presented on CLKIN pins          |      |      | 1.0  | ms    |

#### Notes:


1. See Switching Waveforms on page 6

## Switching Waveforms


Duty Cycle Timing




All Outputs Rise/Fall Time




Output-Output Skew

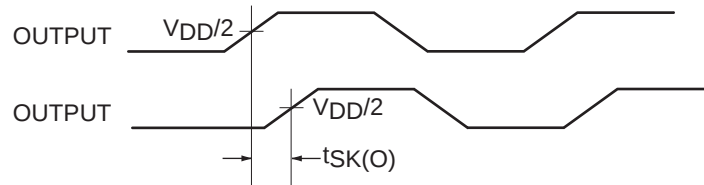


Device-Device Skew

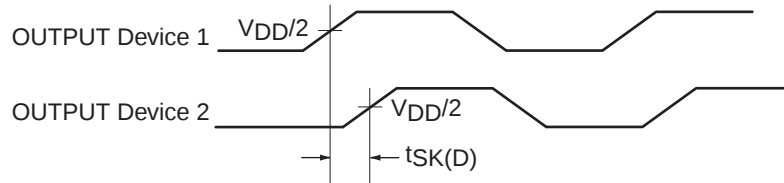

Input-Output Propagation Delay

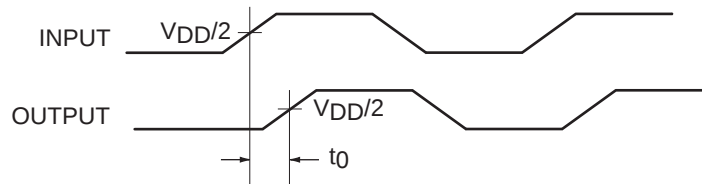


Test Circuit 1

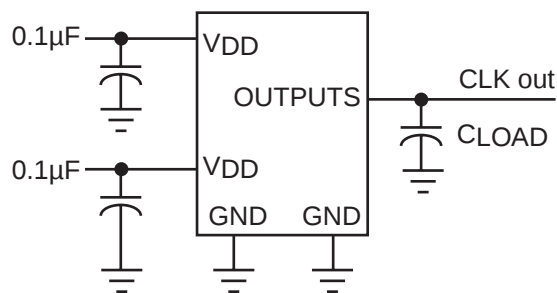


Test Circuit for all parameters except  $t_{SLEW}$

Test Circuit 2

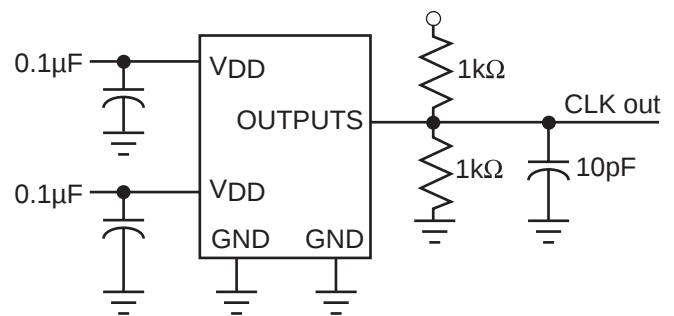


Test Circuit for  $t_{SLEW}$ , Output slew rate on -1H device


### 8-Pin SOIC (W) Package

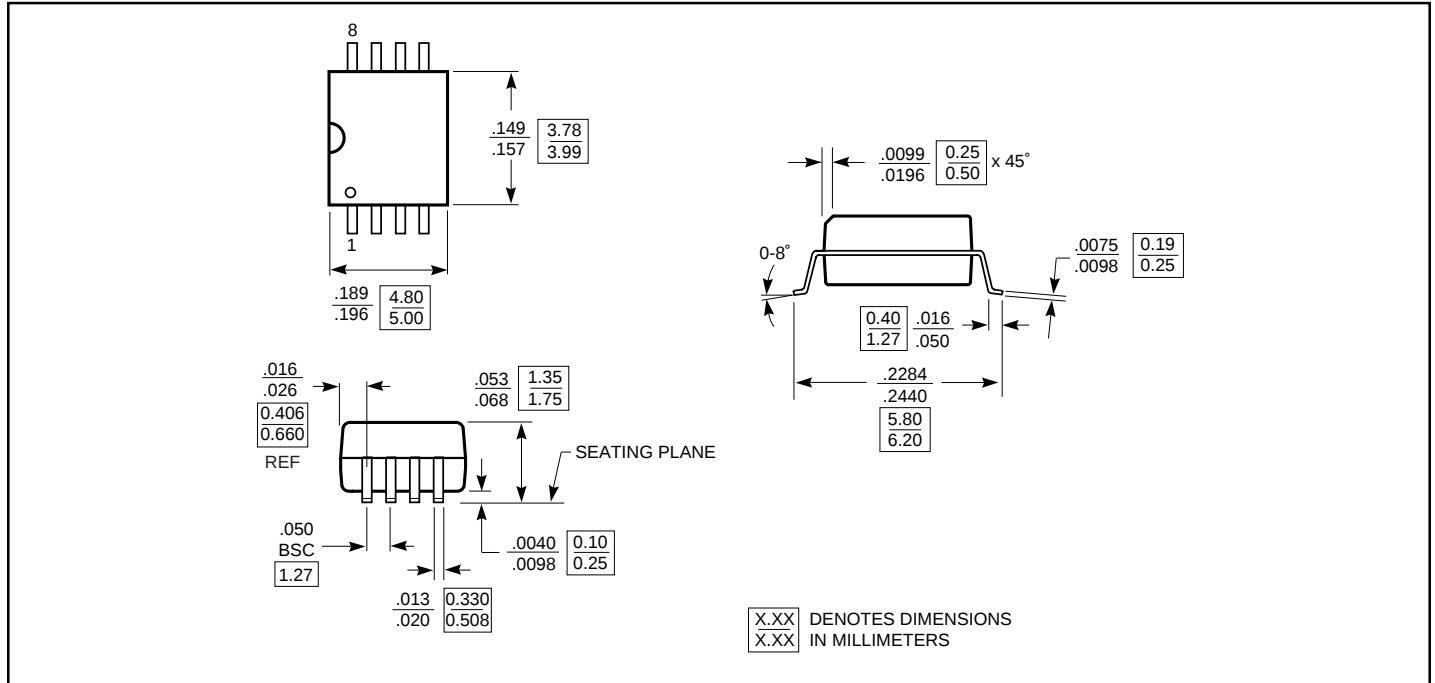


### 16-Pin SOIC (W) Package

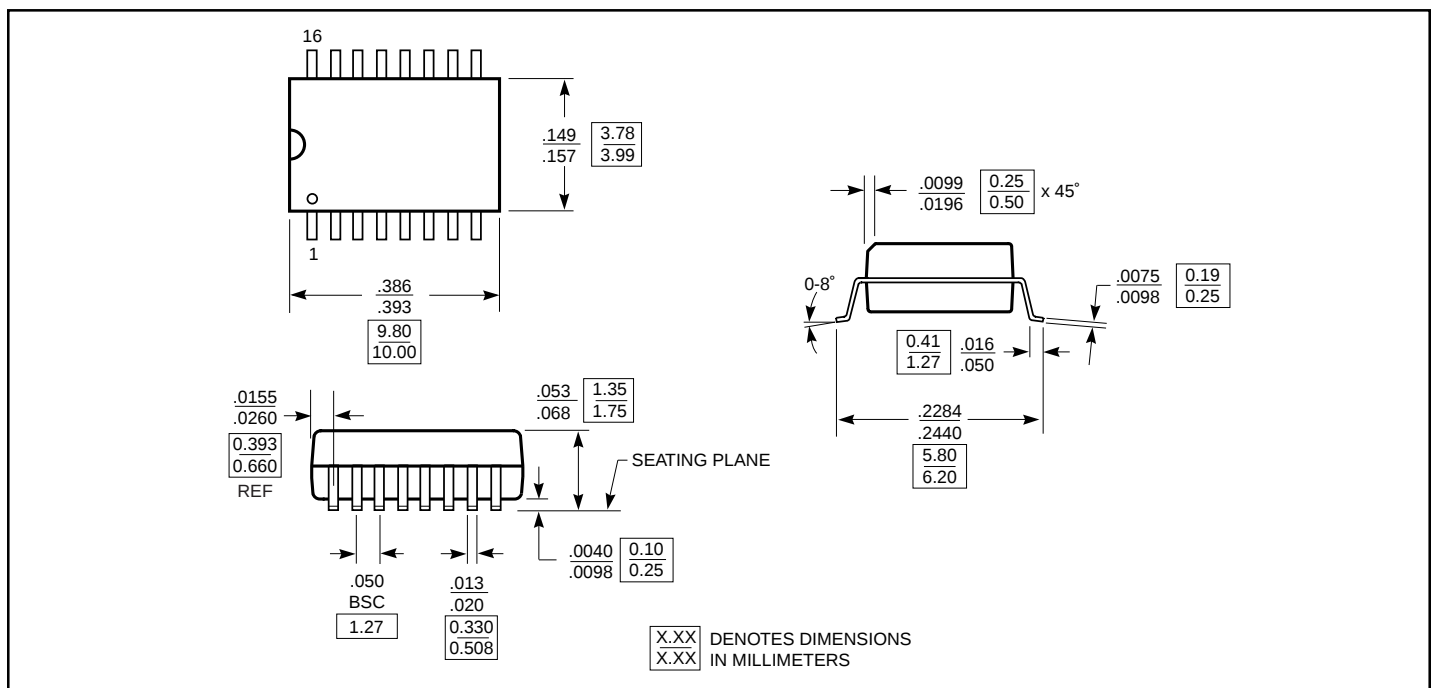

## 8-Pin TSSOP (L) Package

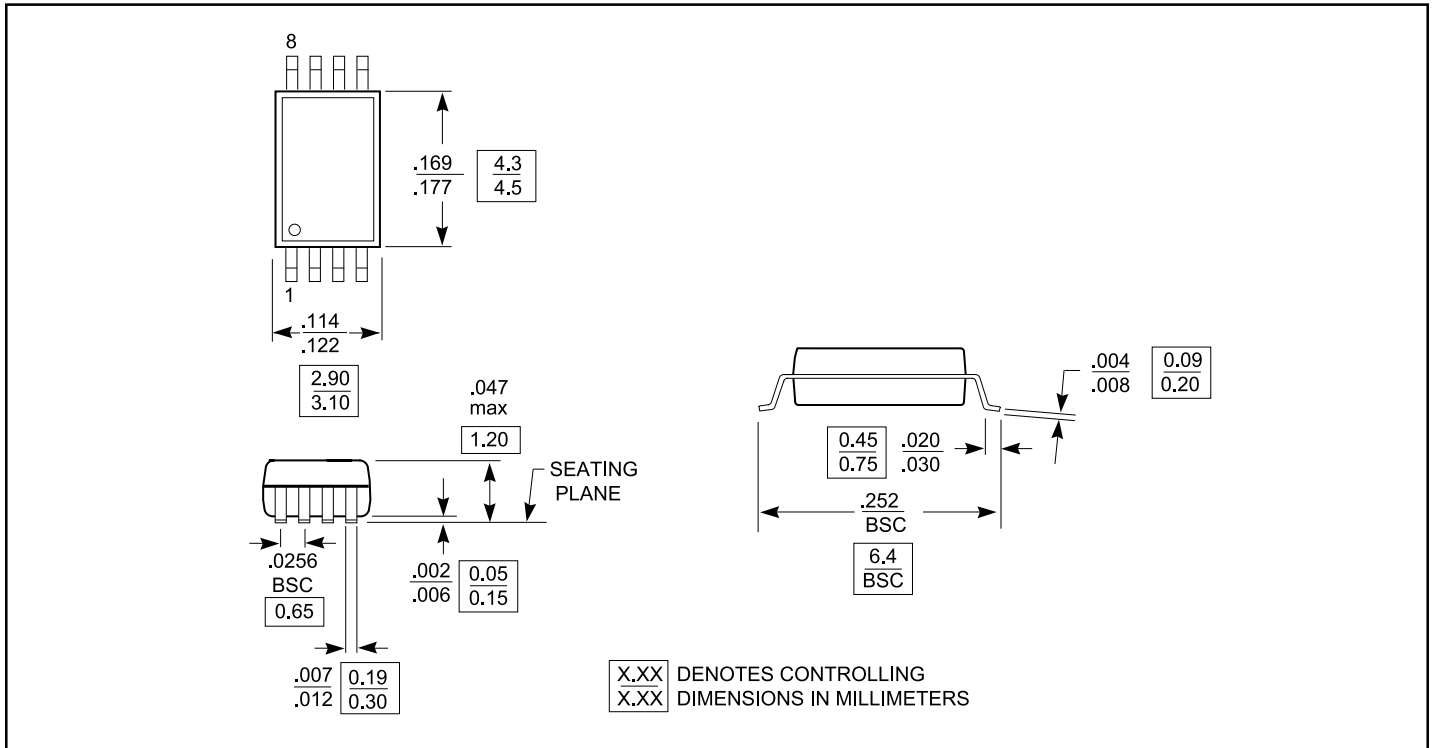

## 16-Pin TSSOP (L) Package

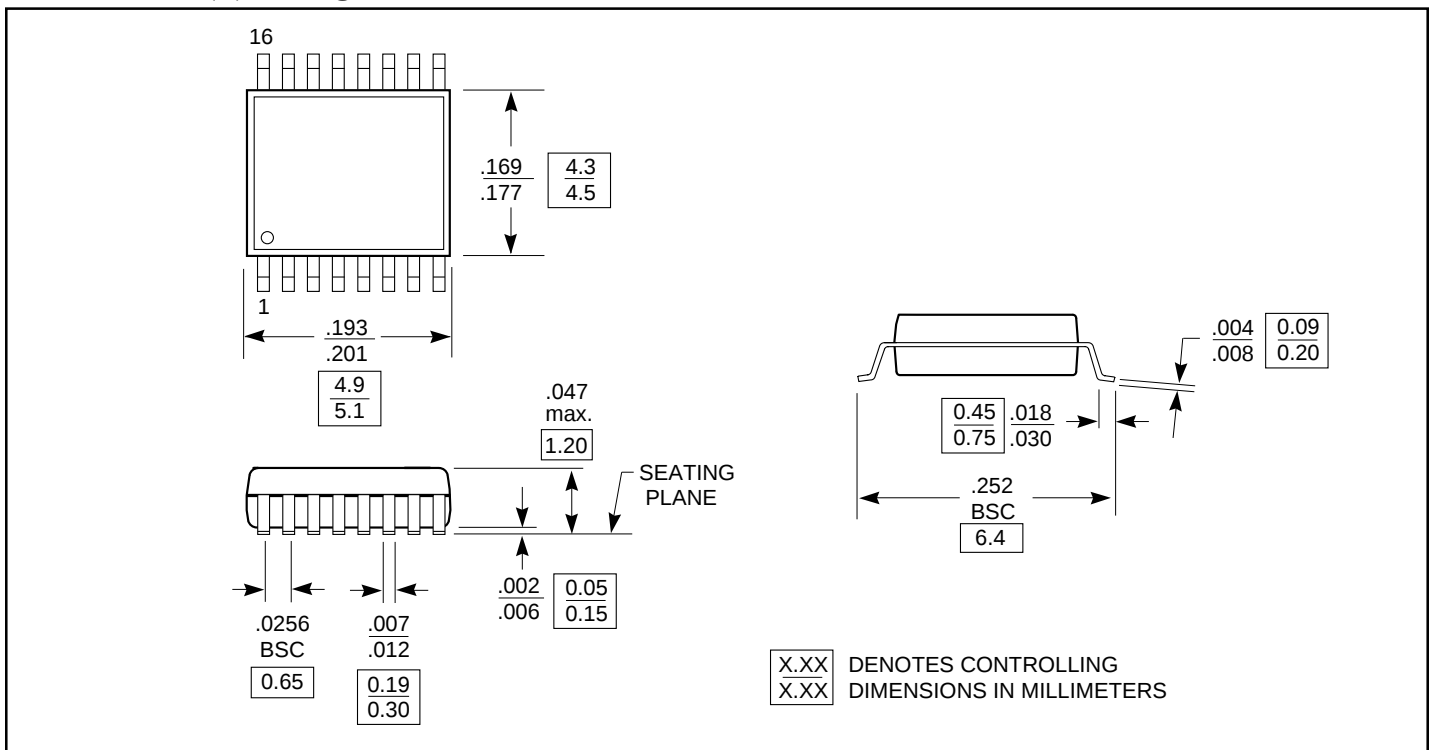

**Note:** Controlling dimensions in millimeters. Ref: JEDEC MS - 012 AC

**Ordering Information PI6C2409**

| Ordering Code | Package Name | Package Type        | Operating Range |
|---------------|--------------|---------------------|-----------------|
| PI6C2409-1W   | W16          | 16-pin 150-mil SOIC | Commercial      |
| PI6C2409-1HW  |              |                     |                 |
| PI6C2409-1L   | L16          | 16-pin TSSOP        |                 |
| PI6C2409-1HL  |              |                     |                 |
| PI6C2409-1WI  | W16          | 16-pin 150-mil SOIC | Industrial      |
| PI6C2409-1HWI |              |                     |                 |
| PI6C2409-1LI  | L16          | 16-pin TSSOP        |                 |
| PI6C2409-1HLI |              |                     |                 |

**Ordering Information PI6C2305**

| Ordering Code | Package Name | Package Type       | Operating Range |
|---------------|--------------|--------------------|-----------------|
| PI6C2405-1W   | W8           | 8-pin 150-mil SOIC | Commercial      |
| PI6C2405-1HW  |              |                    |                 |
| PI6C2405-1L   | L8           | 8-pin TSSOP        |                 |
| PI6C2405-1HL  |              |                    |                 |
| PI6C2405-1WI  | W8           | 8-pin 150-mil SOIC | Industrial      |
| PI6C2405-1HWI |              |                    |                 |
| PI6C2405-1LI  | L18          | 8-pin TSSOP        |                 |
| PI6C2405-1HLI |              |                    |                 |