



22.5mm or 27.5mm Mounting Diameter;
Front or Rear Mount; Sunlight Visible

20mm Big Dome Panel Mount LED Lamps



Features


- Low-Cost, Non-Relampable Panel Mount
- Cylinder Thread Base
- LED Operating Life: 25,000 Hours
- Solid-State, High Shock / Vibration Resistant
- Maintenance Free, Easy Installation
- Wide Viewing Angle, 120°
- Operating Temperature Range: (-60° to +60°C)
- Low Power Consumption, High Intensity
- Major Power Savings
- Major Reduction in Heat Generation
- Built-in Current Limiting Resistor
- Sunlight Visible Super Bright or High-Efficiency LEDs

Custom Options


(for qualified applications)

- Special Voltages
- Black or White Package Color


Big Dome Solid-State LED Lamps (22.5mm Hole, Quick-Connect Terminals) Front Mount

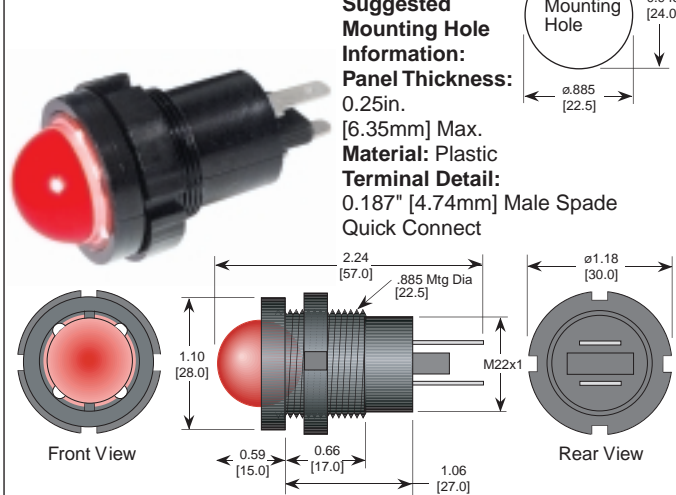

Big Dome Solid-State LED Lamps (27.5mm Hole, Screw Terminals) Front Mount

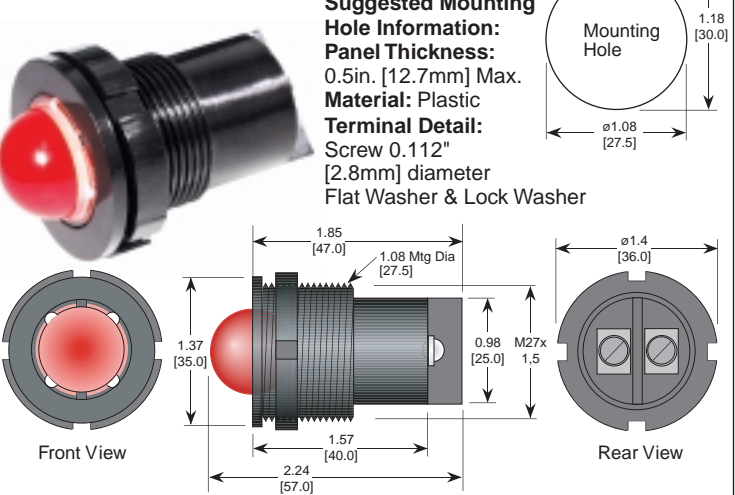

Big Dome Solid-State LED Lamps (27.5mm Hole, Wire Terminals) (Screw Terminal Option) Rear Mount

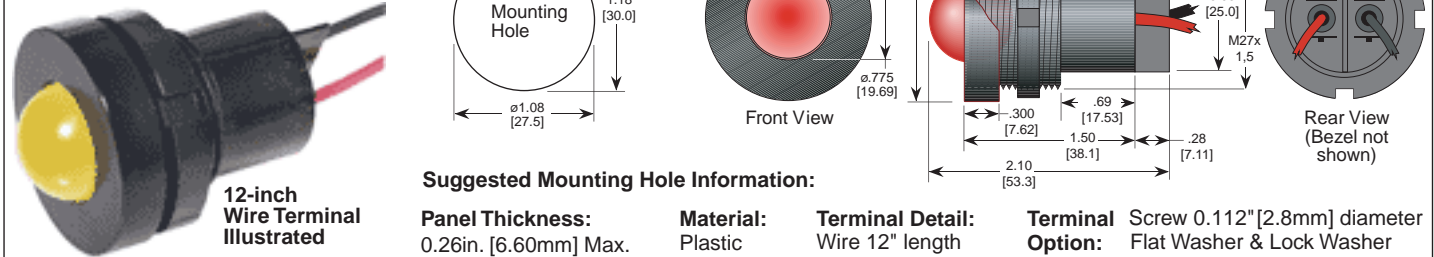

Part Numbering Ordering Code

Series **PTR27.5M** - **D** **UR** - **038** **B** - **W12**

22.5mm
27.5mm, Front Mount
"PTR27.5"; 27.5mm, Rear Mount



On-Condition Appearance

Wire Terminal Length

Custom Options:
(for qualified applications)

B = Bi-polar
D = DC
A = AC



LEDTRONICS, INC.
THE FUTURE OF LIGHT



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: webmaster@ledtronics.com
Website: http://www.ledtronics.com