




PECLF Series

14 Pin DIP PECL

Frequency	10k: 5.000 Mhz. To 110 Mhz. 10kH: 50.000 MHz. To 200 MHz. 10E, 100 E: 100 Mhz. To 400 MHz.			
Output Level	‘0’ = +3.57 Vdc Max. , ‘1’ = +4.22 Vdc Min.			
Duty Cycle	50% ± 5%			
Rise/ Fall Time (20%~80%)	10k: 1.5 ns Typ.	10kH: 800 ps Typ.	10E: 500ps Typ.	100E: 500ps Typ.
Output Load	50 Ω to +3.2V or 390 Ω to Vee			
Stability				
Over all conditions	See Table Frequency Stability			
Supply Voltage	+5.2VDC ±5%			
Current	60 mA Max , 40 mA Typ.			
Temperature				
Operating	0°C ~ +70°C			
Storage	-55°C to +125°C			
Frequency vs.(calibration tolerance, operating temp., input voltage change, load change, aging, shock, and vibration) in ppm				
B	C	W	X	
± 50	± 100	± 500	± 1000	
Part Number Guide Sample Part #: PECLF- B100EAA-100.000				
	Frequency Stability	Device type: 10k, 10 kH, 10E, 100E	Package	Frequency
PECLF	B = ± 50 ppm	100E	AA	100.000 MHz

DIMENSION UNITS: mm

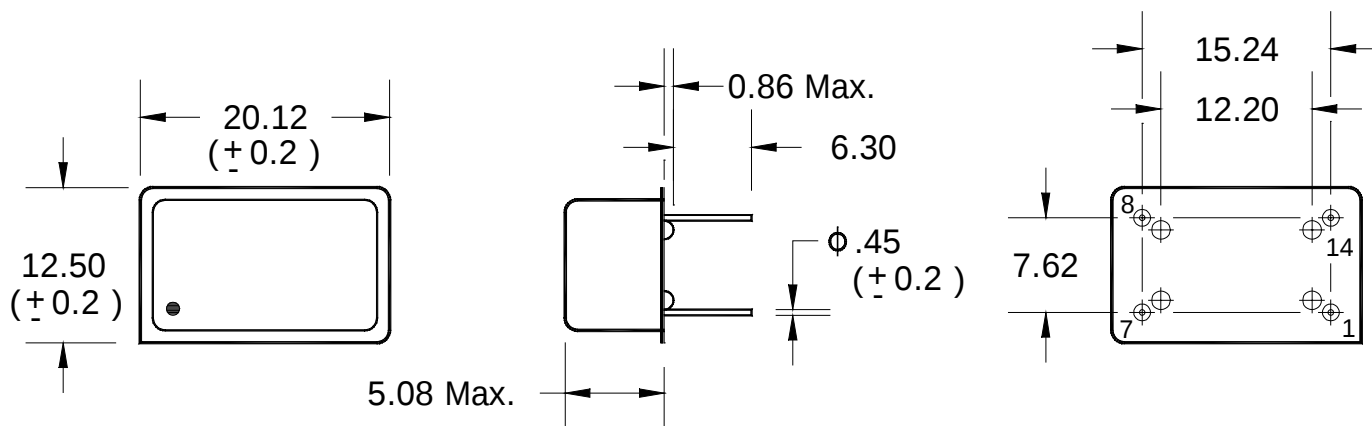

PIN 1	Package AA	Package AB	Package AC	Package BA	Package BB
PIN 7	CASE GND	CASE GND	NC	COMP. OUT	COMP. OUT
PIN 8	GND	CASE GND	GND	GND	CASE GND
PIN 14	OUTPUT	OUTPUT	OUTPUT	OUTPUT	OUTPUT
	Vcc	Vcc	Vcc	Vcc	Vcc

ILSI America
 5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882
 • email: e-mail@ilsiamerica.com • www.ilsiamerica.com
 Specifications subject to change without notice