


PHOTONIC DETECTORS INC.

Silicon Photodiode, Near I.R. Photoconductive Type PDI-C109-F

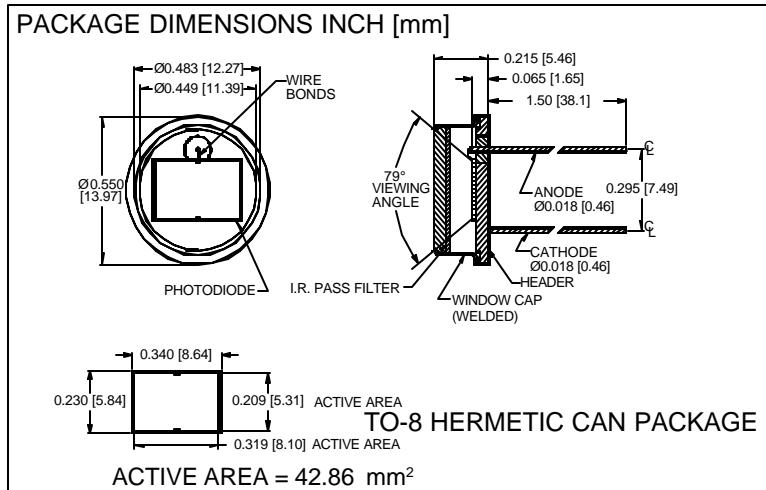

FEATURES

- High speed
- I.R. pass visible rejection
- Match to I.R. emitters
- Hermetic package

The PDI-C109-F is a silicon, PIN planar diffused photodiode with NIR pass, visible light rejection optical filter. Ideal for high speed, low capacitance, photoconductive NIR applications. Packaged in a hermetic

TO-8 metal can with a flat window cap.

ABSOLUTE MAXIMUM RATING (TA=25°C unless otherwise noted)


SYMBOL	PARAMETER	MIN	MAX	UNITS
V_{BR}	Reverse Voltage		100	V
T_{STG}	Storage Temperature	-55	+100	°C
T_o	Operating Temperature Range	-40	+80	°C
T_s	Soldering Temperature*		+240	°C
I_L	Light Current		1.0	mA

*1/16 inch from case for 3 secs max

APPLICATIONS

- I.R. detector
- I.R. laser detector
- Photo-interrupters
- Industrial controls

SPECTRAL RESPONSE

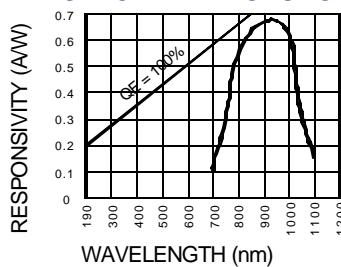

ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	Typ	MAX	UNITS
I_{sc}	Short Circuit Current	$H = 100 \text{ fc}$, 2850 K	405	450		mA
I_D	Dark Current	$H = 0$, $V_R = 10 \text{ V}$		5	15	nA
R_{sh}	Shunt Resistance	$H = 0$, $V_R = 10 \text{ mV}$	30	100		MΩ
$TC R_{sh}$	R_{sh} Temp. Coefficient	$H = 0$, $V_R = 10 \text{ mV}$		-8		% / °C
C_J	Junction Capacitance	$H = 0$, $V_R = 10 \text{ V}^{**}$		120		pF
λ_{range}	Spectral Application Range	Spot Scan	700		1100	nm
λ_p	Spectral Response - Peak	Spot Scan		950		nm
V_{BR}	Breakdown Voltage	$I = 10 \text{ mA}$	30	50		V
N_{EP}	Noise Equivalent Power	$VR = 10 \text{ V} @ \text{Peak}$		5×10^{-13}		$\text{W/}\sqrt{\text{Hz}}$
tr	Response Time	$RL = 1 \text{ K}\Omega$, $V_R = 50 \text{ V}$		25		nS

Information in this technical data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice. ** $f = 1 \text{ MHz}$