

PC723V

High Collector-emitter Voltage Type Photocoupler

- ✿ Lead forming type (I type) and taping reel type (P type) are also available. (PC723VI/PC723VP)
- ✿ TÜV (VDE0884) approved type as an option is also available.

■ Features


1. High collector-emitter voltage (V_{CEO} : 80V)
2. High isolation voltage between input and output (V_{iso} : 5 000V_{rms})
3. Current transfer ratio
CTR : MIN. 50% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$
4. TTL compatible output
5. Recognized by UL, file No. E64380

■ Applications

1. Telephone systems, telegram systems
2. System appliances, measuring instruments
3. Signal transmission between circuits of different potentials and impedances

■ Outline Dimensions

(Unit : mm)

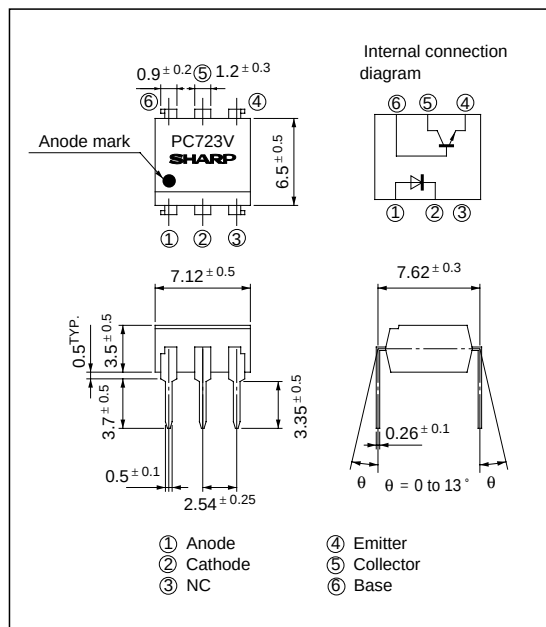

■ Absolute Maximum Ratings

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	80	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector-base voltage	V_{CBO}	130	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
	Total power dissipation	P_{tot}	200	mW
	*2Isolation voltage	V_{iso}	5 000	V _{rms}
	Operating temperature	T_{opr}	- 25 to + 100	°C
	Storage temperature	T_{stg}	- 40 to + 125	°C
	*3Soldering temperature	T_{sol}	260	°C

*1 Pulse width $\leq 100\mu\text{s}$, Duty ratio : 0.001

*2 40 to 60% RH, AC for 1 minute

*3 For 10 seconds

■ Electro-optical Characteristics

(Ta= 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V _F	I _F = 20mA	-	1.2	1.4	V
	Peak forward voltage		V _{FM}	I _{FM} = 0.5A	-	-	3.0	V
	Reverse current		I _R	V _R = 4V	-	-	10	μ A
	Terminal capacitance		C _t	V = 0, f = 1kHz	-	30	250	pF
Output	Collector dark current		I _{CEO}	V _{CE} = 40V, I _F = 0, R _{BE} = ∞	-	-	10 ⁻⁷	A
Transfer charac- teristics	Current transfer ratio		CTR	I _F = 5mA, V _{CE} = 5V, R _{BE} = ∞	50	100	400	%
	Collector-emitter saturation voltage		V _{CE(sat)}	I _F = 20mA, I _C = 1mA, R _{BE} = ∞	-	0.1	0.3	V
	Isolation resistance		R _{ISO}	DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹	-	Ω
	Floating capacitance		C _f	V = 0, f = 1MHz	-	0.6	1.0	pF
	Cut-off frequency		f _c	V _{CE} = 5V, I _C = 2mA, R _L = 100 Ω, R _{BE} = ∞, -3dB	-	50	-	kHz
	Response time	Rise time	t _r	V _{CE} = 2V, I _C = 2mA	-	6	20	μ s
Fall time		t _f	R _L = 100 Ω, R _{BE} = ∞	-	7	20	μ s	

Fig. 1 Forward Current vs. Ambient Temperature

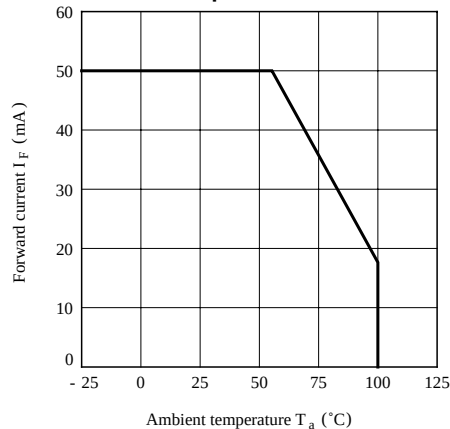


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

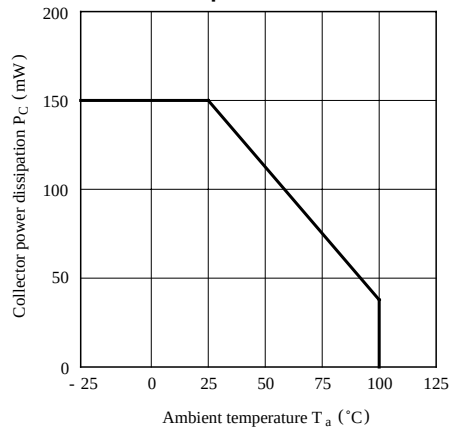


Fig. 3 Peak Forward Current vs. Duty Ratio

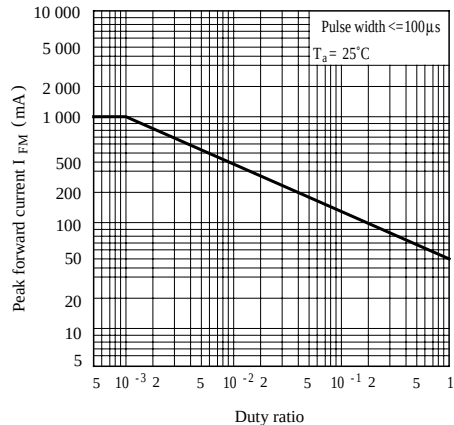


Fig. 4 Forward Current vs. Forward Voltage

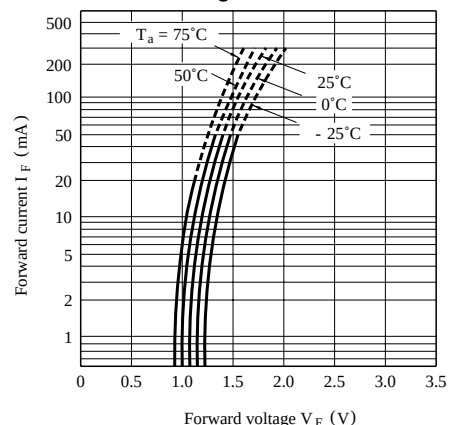


Fig. 5 Current Transfer Ratio vs. Forward Current

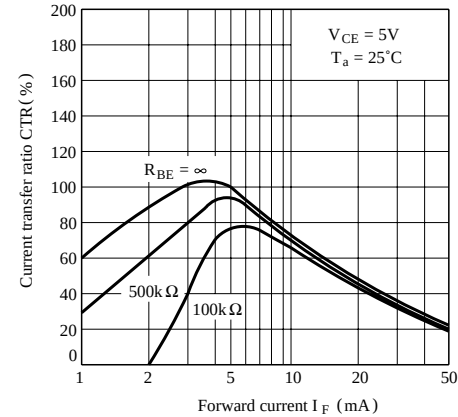


Fig. 6 Collector Current vs. Collector-emitter Voltage

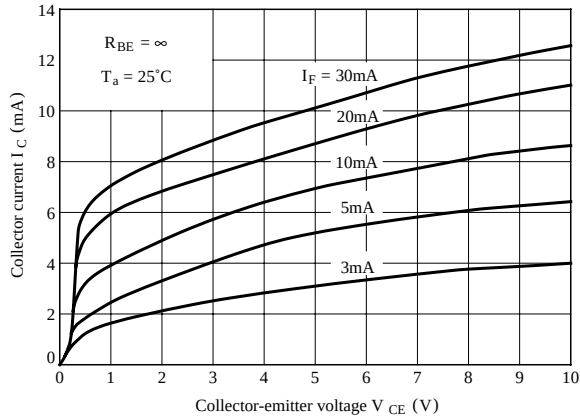


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

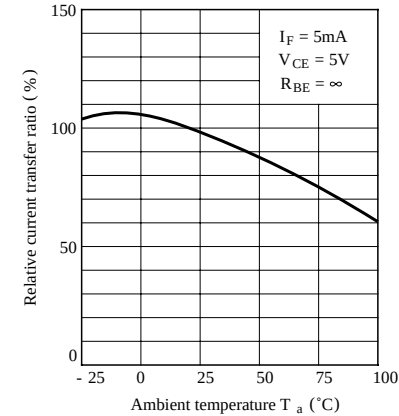


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

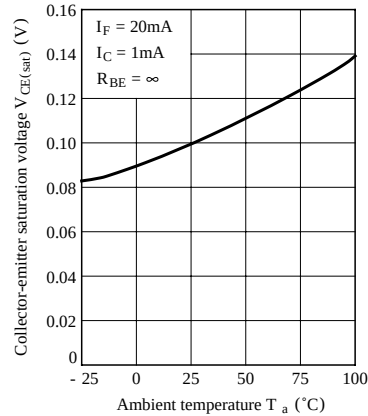


Fig. 9 Collector Dark Current vs. Ambient Temperature

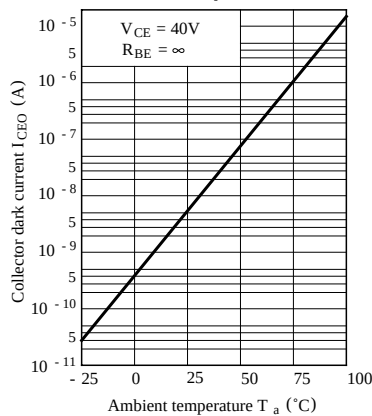


Fig.10 Response Time vs. Load Resistance


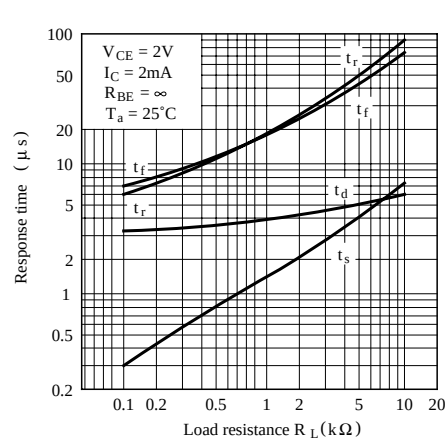


Fig.11 Frequency Response

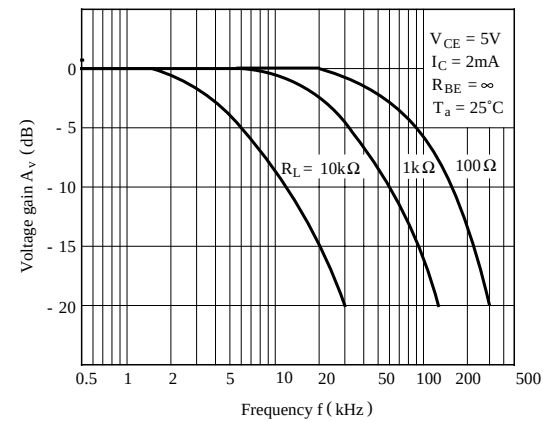

Test Circuit for Response Time



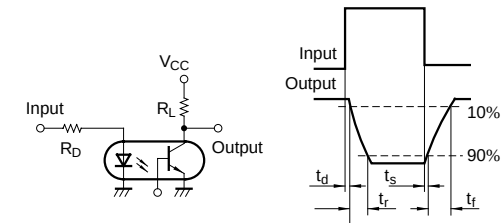


Fig.12 Collector-emitter Saturation Voltage vs. Forward Current

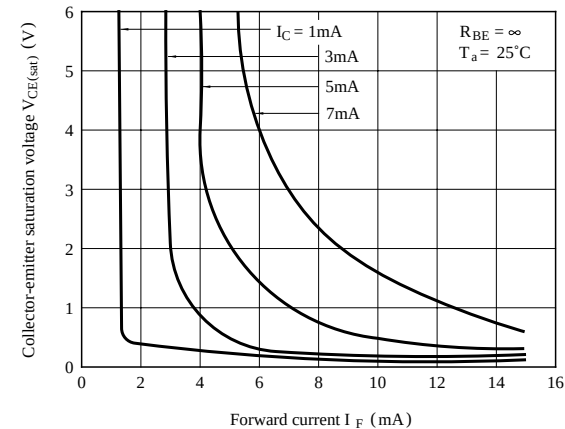

Test Circuit for Frequency Response

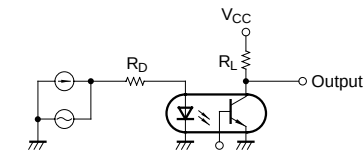

● Please refer to the chapter “Precautions for Use”.