

APPLICATIONS

- ✓ Cellular Phones
- ✓ MCM Boards
- ✓ Wireless Communication Circuits
- ✓ IR LEDs
- ✓ SMART Cards & PCMCIA Cards

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES


- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Multiple Voltage Types Ranging From 3.3V to 36V
- ✓ 250 Watts Peak Pulse Power Dissipation per Line (8/20μs)
- ✓ Monolithic Structure

MECHANICAL CHARACTERISTICS

- ✓ Standard EIA Chip Size: 0406
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481-1-A
- ✓ Device Marking On Reel
- ✓ Top Contacts: Solder Bump 0.004" in Height (Nominal)

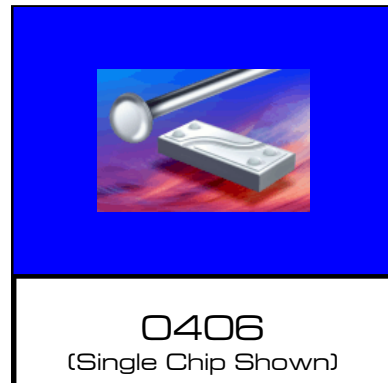

CIRCUIT DIAGRAM

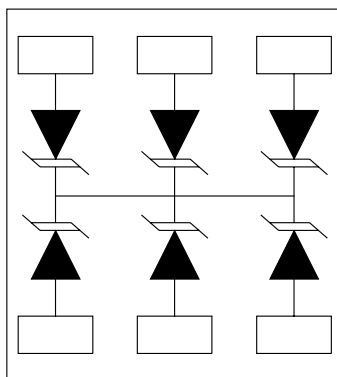

P0406FC3.3C thru P0406FC36C

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	250	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	TYPICAL CAPACITANCE 0V @ 1 MHz C pF
P0406FC3.3C	3.3	4.0	7.0	12.5V @ 20A	75	150
P0406FC05C	5.0	6.0	9.8	14.7V @ 17A	10	100
P0406FC08C	8.0	8.5	13.4	19.2V @ 13A	10	75
P0406FC12C	12.0	13.3	19.0	29.7V @ 9.0A	1	50
P0406FC15C	15.0	16.7	24.0	35.7V @ 7.0A	1	40
P0406FC24C	24.0	26.7	43.0	55.0V @ 5.0A	1	30
P0406FC36C	36.0	40.0	64.0	84.0V @ 3.0A	1	25

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME






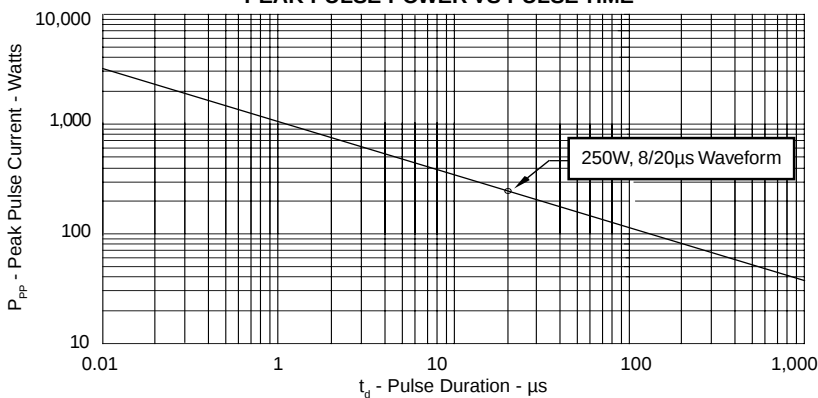


FIGURE 2
PULSE WAVE FORM

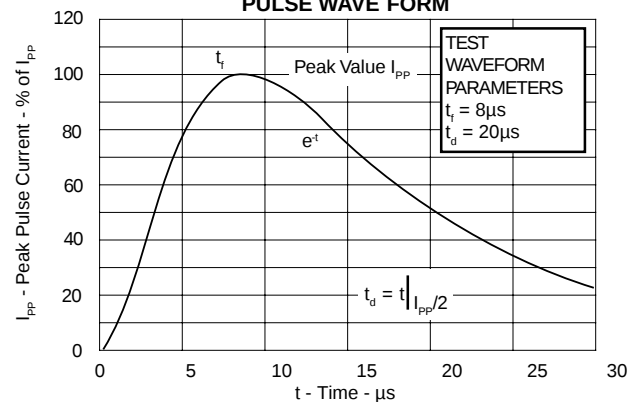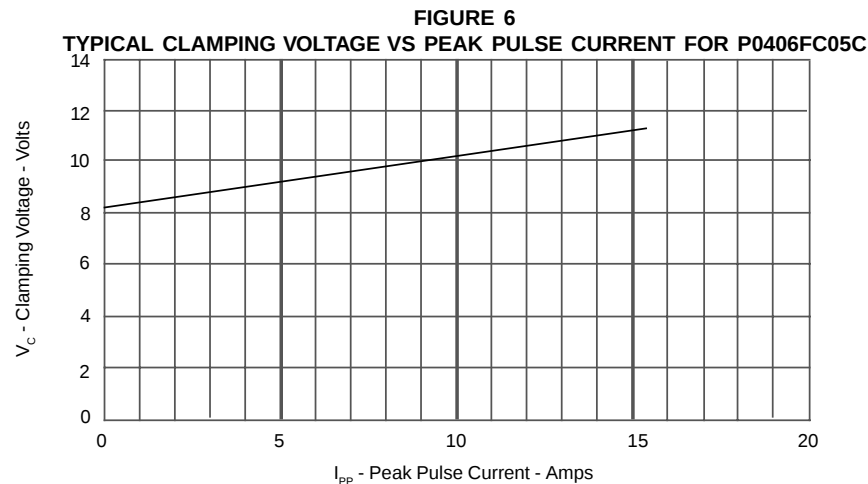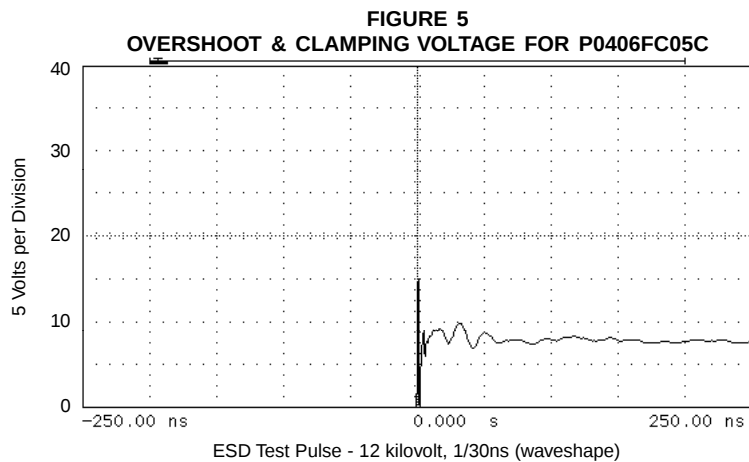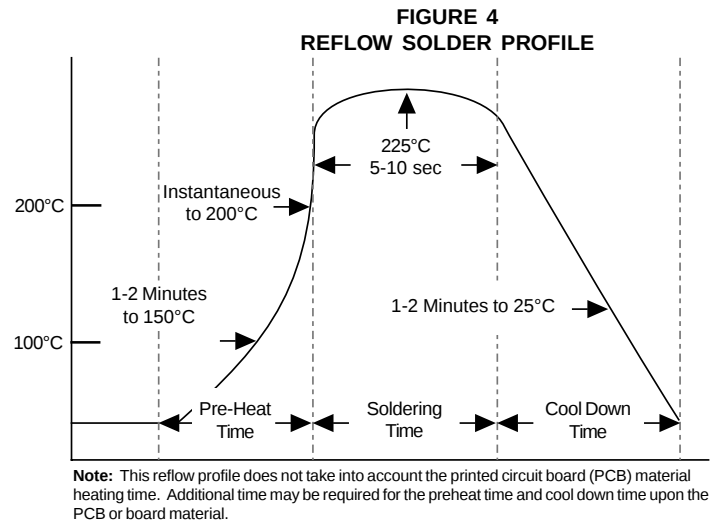


P0406FC3.3C thru P0406FC36C

GRAPHS

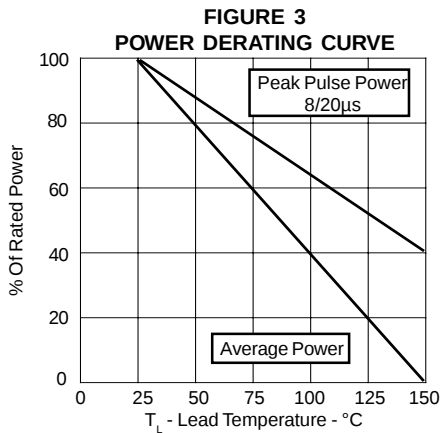

P0406FC3.3C
thru
P0406FC36C


PACKAGE OUTLINE & DIMENSIONS

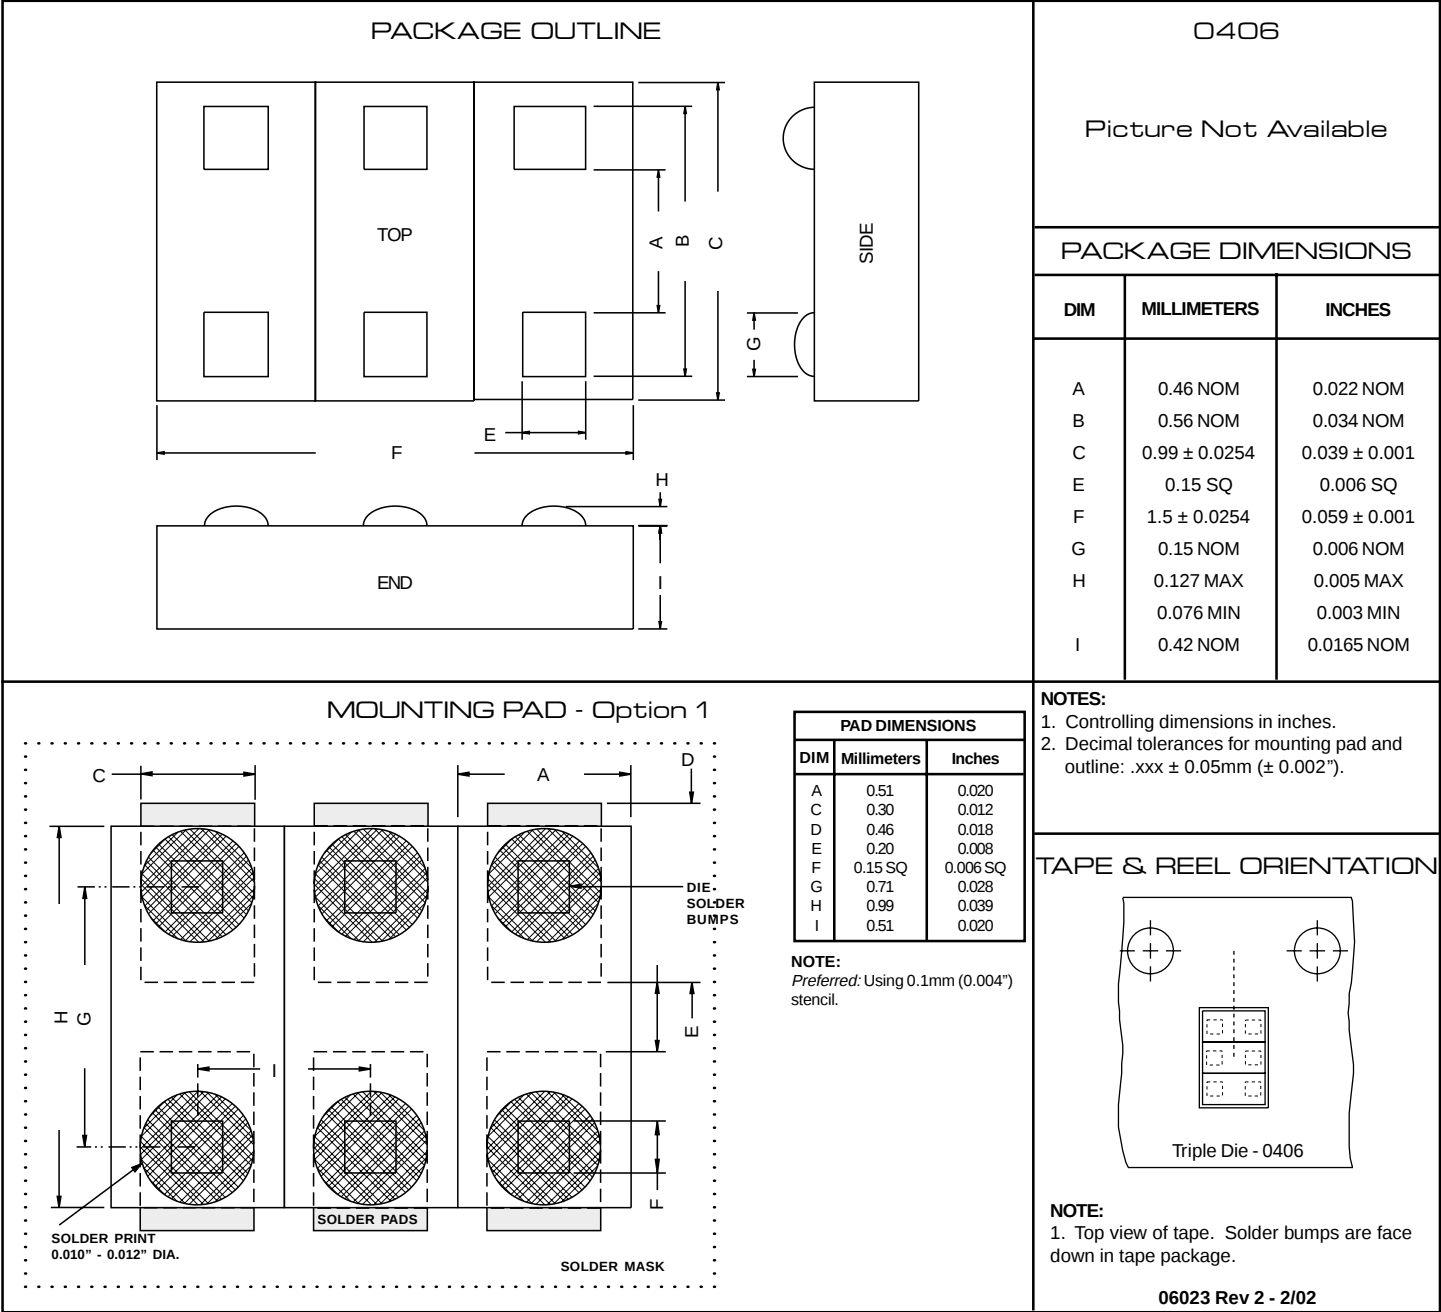

TAPE & REEL PACKAGING:
Surface mount product is taped and reeled in accordance with EIA-481, reel quantities and sizes are as follows:
Paper Tape: 7 Inch Reel - 3,000 or 10,000 pieces per reel. Plastic Tape: 7 Inch Reel - 3,000 or 5,000 per reel.

P0406FC3.3C
thru
P0406FC36C

PACKAGE OUTLINE & DIMENSIONS

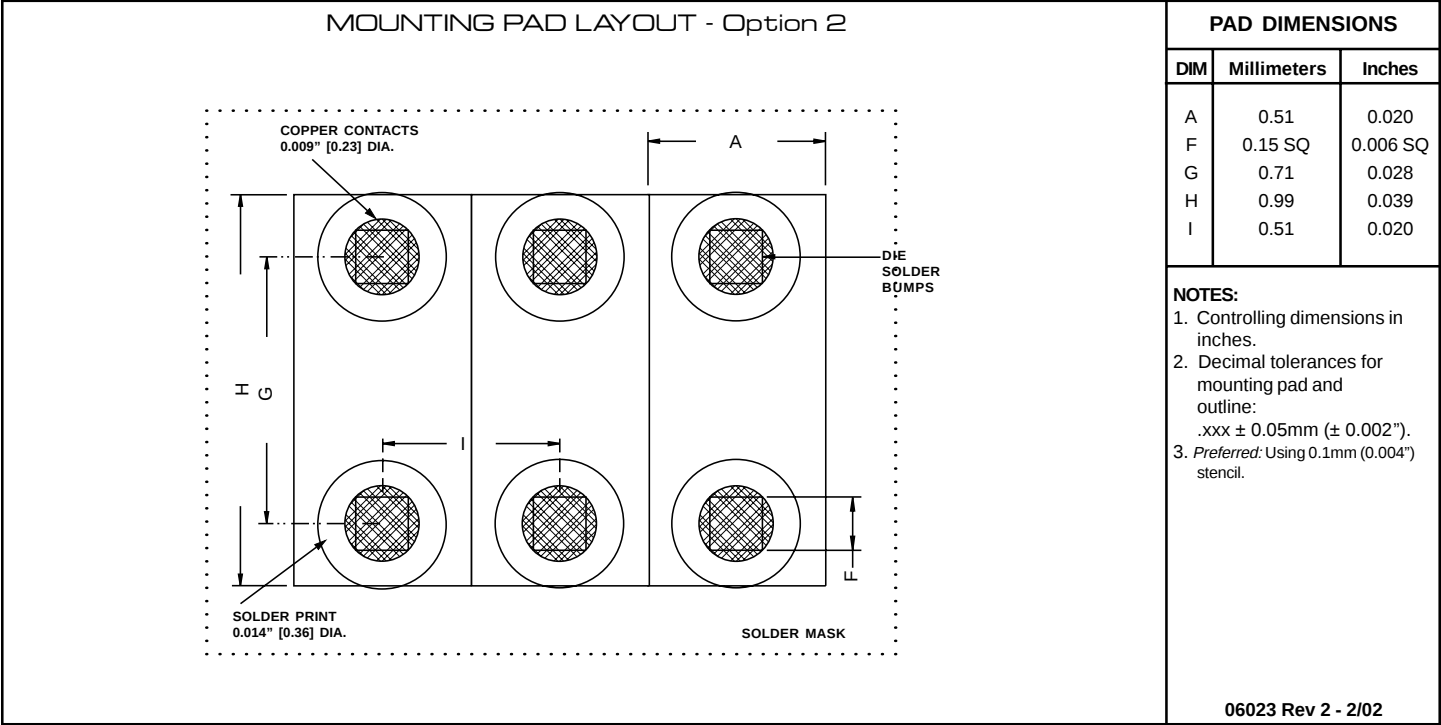

TAPE & REEL PACKAGING:
Surface mount product is taped and reeled in accordance with EIA-481, reel quantities and sizes are as follows:
Paper Tape: 7 Inch Reel - 3,000 or 10,000 pieces per reel. Plastic Tape: 7 Inch Reel - 3,000 or 5,000 per reel.

COPYRIGHT © ProTek Devices 2001
SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC). DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
2929 South Fair Lane, Tempe, AZ 85282
Tel: 602-431-8101 Fax: 602-431-2288
E-Mail: sales@protekdevices.com
Web Site: www.protekdevices.com