

THYRISTOR SURGE PROTECTIVE DEVICE

V_{DRM} : 58 - 320 V

I_{PP} : 100 A


FEATURES

- ◇ Oxide glass passivated junction
- ◇ Bidirectional protection in a single device
- ◇ Surge capabilities up to 50A @10/1000us or 150A @8/20us
- ◇ High off state impedance and low on state voltage
- ◇ Plastic material has U/L flammability classification 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-27 molded plastic
- ◇ Polarity: Denotes none cathode band
- ◇ Weight: 0.041ounce, 1.17 grams

DO - 27

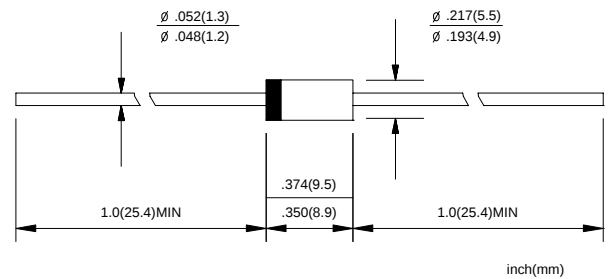

MAXIMUM RATINGS

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Non-repetitive peak impulse current @ 10/1000us	I_{PP}	100	A
Non-repetitive peak on-state current @ 8.3ms (one half cycle)	I_{TSM}	50	A
Junction temperature range	T_J	-55 --- +150	°C
Storage temperature range	T_{STG}	-55 --- +150	°C


THERMAL RESISTANCE

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Junction to leads	$R_{\theta JL}$	20	°C/W
Junction to ambient on print circuit (on recommended pad layout)	$R_{\theta JA}$	100	°C/W
Typical positive temperature coefficient for breakdown voltage	V_{BR}/T_J	0.1	%/°C

MAXIMUM RATED SURGE WAVEFORM

WAVEFORM	STANDARD	$I_{PP}(A)$
2/10 us	GR-1089-CORE	500
8/20 us	IEC 61000-4-5	400
10/160 us	FCC Part 68	250
10/700 us	ITU-T K20/21	200
10/560 us	FCC Part 68	160
10/1000 us	GR-1089-CORE	100

I_{PP} , PEAK PULSE CURRENT (%)

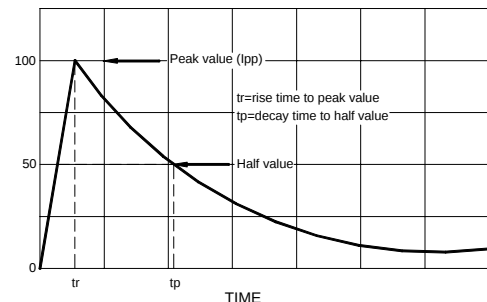


www.galaxycn.com

RATINGS AND CHARACTERISTIC CURVES

P064H --- P350H

PARAMETER	RATED REPETITIVE OFF-STATE VOLTAGE	OFF-STATE LEAKAGE CURRENT @ V_{DRM}	BREAKOVER VOLTAGE	ON-STATE VOLTAGE @ $I_T=1.0A$	BREAKOVER CURRENT		HOLDING CURRENT		OFF-STATE CAPACITANCE
SYMBOL	V_{DRM}	I_{DRM}	V_{BO}	V_T	I_{BO-}	I_{BO+}	I_{H-}	I_{H+}	C_o
UNITS	Volts	μA	Volts	Volts	mA	mA	mA	mA	pF
LIMIT	Max	Max	Max	Max	Min	Max	Min	Max	Typ
P064H	58	5	77	3.5	50	800	150	800	200
P072H	65	5	88	3.5	50	800	150	800	200
P090H	75	5	98	3.5	50	800	150	800	200
P110H	90	5	130	3.5	50	800	150	800	120
P130H	120	5	160	3.5	50	800	150	800	120
P150H	140	5	180	3.5	50	800	150	800	120
P180H	160	5	220	3.5	50	800	150	800	120
P230H	190	5	265	3.5	50	800	150	800	80
P260H	220	5	300	3.5	50	800	150	800	80
P310H	275	5	350	3.5	50	800	150	800	80
P350H	320	5	400	3.5	50	800	150	800	80

SYMBOL	PARAMETER
V_{DRM}	Stand-off voltage
I_{DRM}	Leakage current at stand-off voltage
V_{BR}	Breakdown voltage
I_{BR}	Breakdown current
V_{BO}	Breakover voltage
I_{BO}	Breakover current
I_H	Holding current Note:1
V_T	On state voltage
I_{PP}	Peak pulse current
C_O	Off state capacitance Note:2

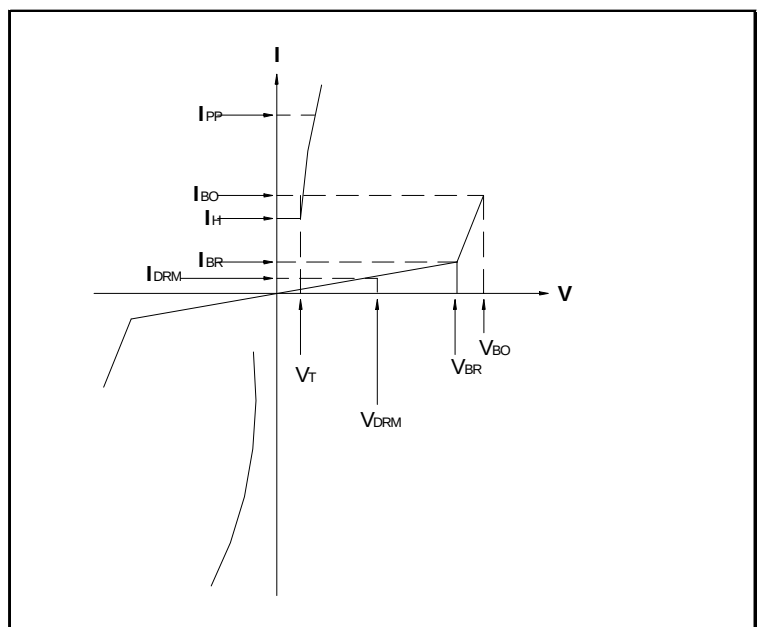

NOTES: 1. $I_H > (V_L/R_L)$ if this criterion is not obeyed, the T_{SPD} triggers but does not return correctly to high-resistance state. The surge recovery time does not exceed 30ms.

2. Off-state capacitance measured at $f=1.0MHz$; $1.0V_{RMS}$ signal; $V_R=2V_{DC}$ bias.

FIG.1 – OFF STATE CURRENT vs JUNCTION TEMPERATURE

I_{DRM} , OFF STATE CURRENT, μA

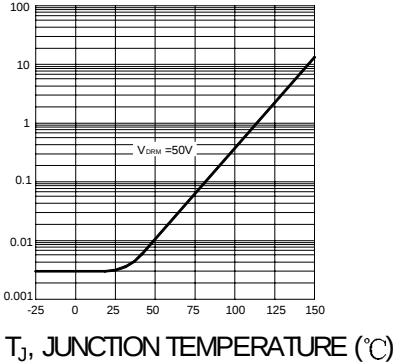


FIG.2- RELATIVE VARIATION OF BREAKDOWN VOLTAGE vs JUNCTION TEMPERATURE

NORMALIZED BREAKDOWN VOLTAGE

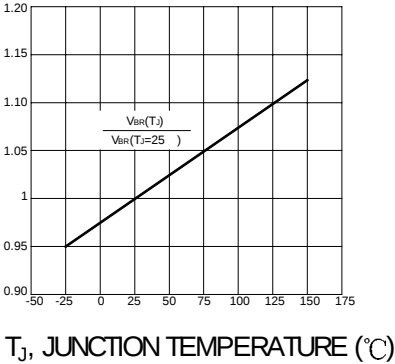


FIG.3 – RELATIVE VARIATION OF BREAKOVER VOLTAGE vs JUNCTION TEMPERATURE

NORMALIZED BREAKOVER VOLTAGE

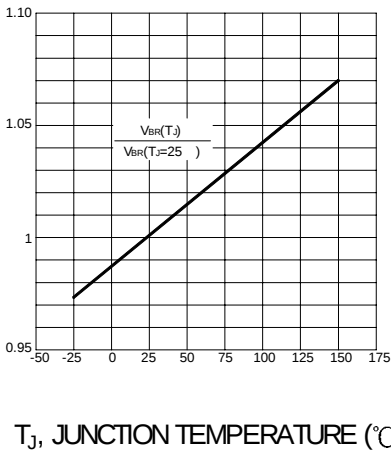


FIG.4 – ON STATE CURRENT vs ON STATE VOLTAGE

I_T , ON STATE CURRENT

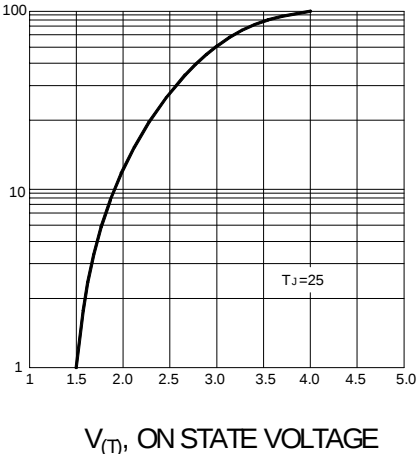


FIG.5 – RELATIVE VARIATION OF HOLDING CURRENT vs JUNCTION TEMPERATURE

NORMALIZED HOLDING CURRENT





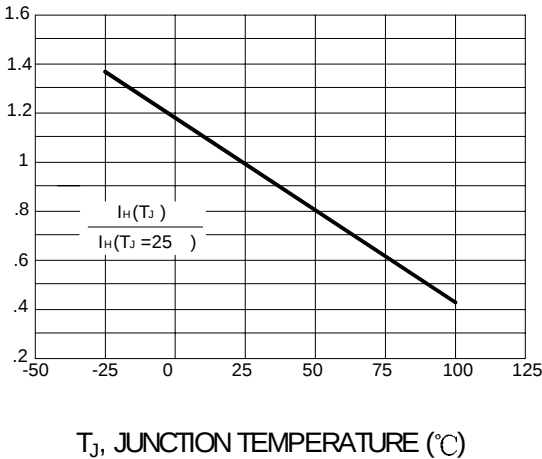


FIG.6 – RELATIVE VARIATION OF JUNCTION CAPACITANCE vs REVERSE VOLTAGE BIAS

NORMALIZE CAPACITANCE

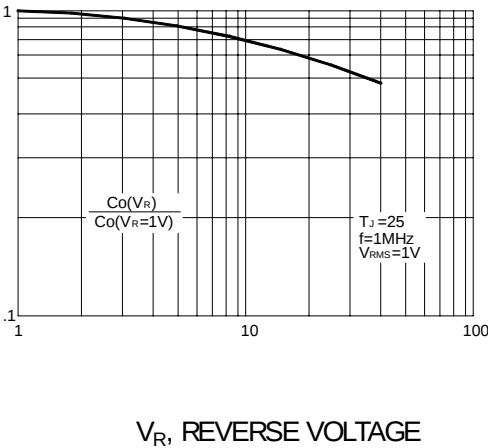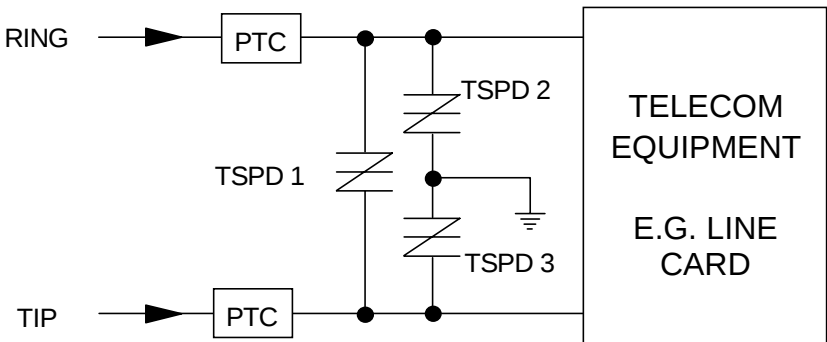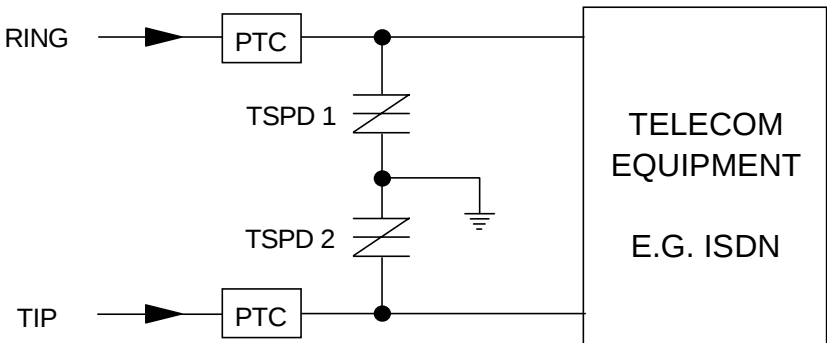

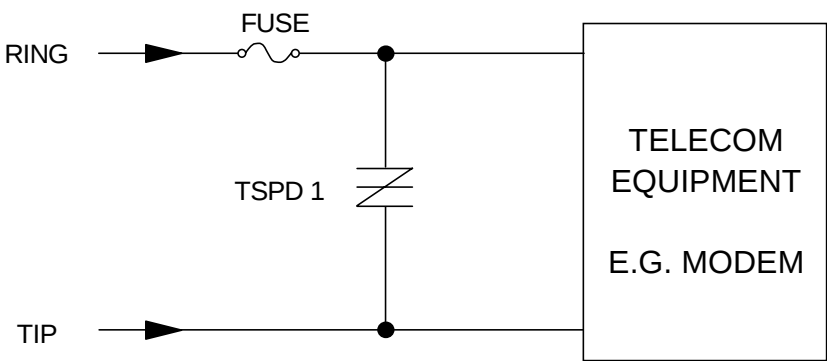

The PTC (Positive Temperature Coefficient) is an overcurrent protection device