

INPUT CHARACTERISTICS:**PSL-6600/6650/6700P**

- VOLTAGE: 90 ~ 264 VAC FULL RANGE
- FREQUENCY : 47 ~ 63 Hz
- INPUT CURRENT: 10.0 / 11.0 / 12 A FOR 115 VAC
- 5.0 / 5.5 / 6.0 A FOR 230 VAC
- INRUSH CURRENT: 65 A MAX. FOR 115 VAC
- 125 A MAX. FOR 230 VAC

OUTPUT CHARACTERISTICS:





OUTPUT VOLTAGE	OUTPUT CURRENT		REGULATION		OUTPUT RIPPLE & NOISE MAX. [P-P]
	MIN.[A]	MAX.[A]	LOAD	LINE	
5V	2.5	50	± 4%	± 1%	60mV
12V	1.0	32	± 5%	± 1%	100mV
-5V	0	0.8	± 5%	± 1%	100mV
-12V	0	1.0	± 5%	± 1%	100mV
3.3V	1.0	45	+5, -5%	± 1%	60mV
+5VSB	0.1	2	± 5%	± 1%	60mV

** REMARKS: **TOTAL OUTPUT POWER NOT EXCEED 600 / 650 / 700 W**

*** WHEN IT PERFORMS CROSS REGULATION TEST, IT IS REQUESTED TO SET THE HIGHER OUTPUT CHANNEL AT 90% MAX. OF ITS SPEC., AND THE LOWER OUTPUT CHANNELS AT 20% MIN. OF THEIRS

- TEMPERATURE RANGE : OPERATING 0°C --- 40°C,
STORAGE -20°C --- 70°C
- * HUMIDITY : 10 ~ 90 % RH
- HOLD UP TIME: 16 ms MINIMUM AT FULL LOAD & 90 VAC INPUT VOLTAGE
- DIELECTRIC WITHSTAND: INPUT / OUTPUT 1500 VAC FOR 1 MINUTE
INPUT TO FRAME GROUND 1500 VAC FOR 1 MINUTE
- EFFICIENCY: 70% TYPICAL, AT FULL LOAD
- POWER GOOD SIGNAL: ON DELAY 100 ms TO 500 ms, OFF DELAY 1 ms
- OVER LOAD PROTECTION: 110 ~ 160% MAX.
- * OVER VOLTAGE PROTECTION:
+5V → 5.7V ~ 6.5V, 3.3V → 3.9 ~ 4.3V, 12V → 13.6 ~ 15V
- * EMI : MEET FCC CLASS B, CISPR22 CLASS B
- SAFETY: MEET UL 1950, CSA 22.2 NO/ 950, TÜV IEC 950
- REMOTE ON / OFF CONTROL
- SHORT PROTECTION: SHUTDOWN AND LATCH
- REMOTE SENSING ON 3.3 V DESIGN
- MEET IEC-1000-3-2 CLASS D (ACTIVE PFC)
- DIMENSION: 86(H) X 150(W) X 220 (D) mm (STRETCH PS/2)
- COOLING : ONE 80 mm DC FAN
- I2C FEATURES (OPTIONAL)

修訂 REVISIONS		日期 DATE
版次 REV.	記述 DESCRIPTION	
A2	將開關孔改為母座孔	JUN-03-2002

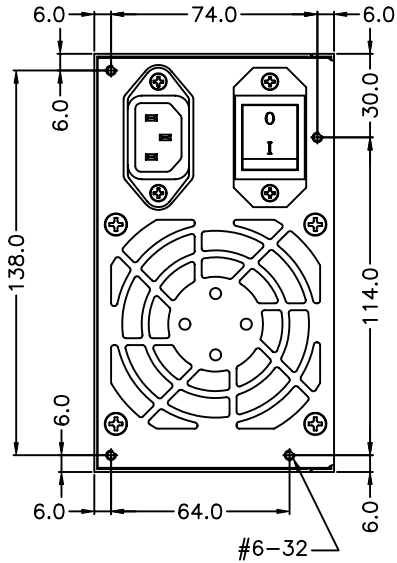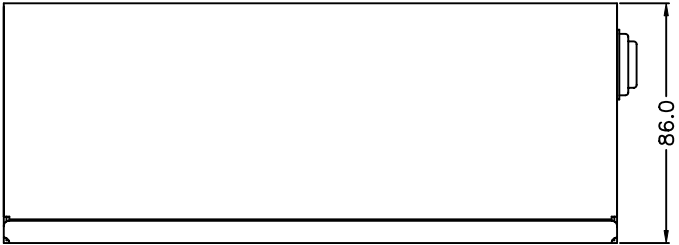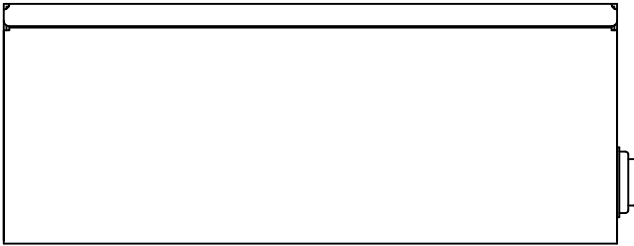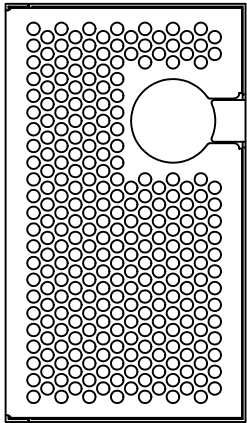

容許公差:
TOLERANCES:
.XXX ±.025
.XX ±.100
.X ±.250

投影法:
PROJECTION:
第三角法

材料規格:
MATERIAL:

核准者:
APPROVE BY:

審核者:
CHECK BY:

繪圖者:
DRAW BY:

日期:
DATE:

日期:
DATE:

日期:
DATE: JUN-03-2002



新巨企業股份有限公司
ZIPPY TECHNOLOGY CORP.
POWER DIVISION

品名:
MODEL NO: PSL 外觀尺寸圖

料號:
PART NO:

圖號:
DRAW NO: PSL0MA00

單位:
UNITS: mm

檔號:
FILE NO:

規格:
SPEC.: A1

編號:
SHEET: OF