

Single Wide Bandwidth Analog Switch

Features

- Single-Supply Operation (+2V to +6V)
- Rail-to-Rail Analog Signal Dynamic Range
- Low On-Resistance (6Ω typ with 5V supply)
Minimizes Distortion and Error Voltages
- On-Resistance Flatness, 3Ω typical
- Low Charge Injection Reduces Glitch Errors. $Q = 4\text{pC}$ (typical)
- Replaces Mechanical Relays
- High Speed: $t_{\text{ON}} = 10\text{ns}$ typical
- Wide -3dB Bandwidth: 300 MHz (typical)
- High-Current Channel Capability: $>100\text{mA}$
- TTL/CMOS Logic Compatible
- Low Power Consumption ($0.5\mu\text{W}$ typical)
- Small outline transistor package minimizes board area
– 65 mil wide SOT23-5 (T5)

Applications

- Audio, Video Switching and Routing
- Battery-Powered Communication Systems
- Computer Peripherals
- Telecommunications
- Portable Instrumentation
- Mechanical Relay Replacement
- Cell Phones
- PDAs

Truth Table

$\overline{\text{OE}}$	PI5A125
0	ON
1	OFF

Switch shown for Logic “0” input

Ordering Information

P/N	Package
PI5A125T	SOT23-5

Description

The PI5A125 is a single analog switch designed for single-supply operation. This high-precision device is ideal for low-distortion audio, video, signal switching and routing.

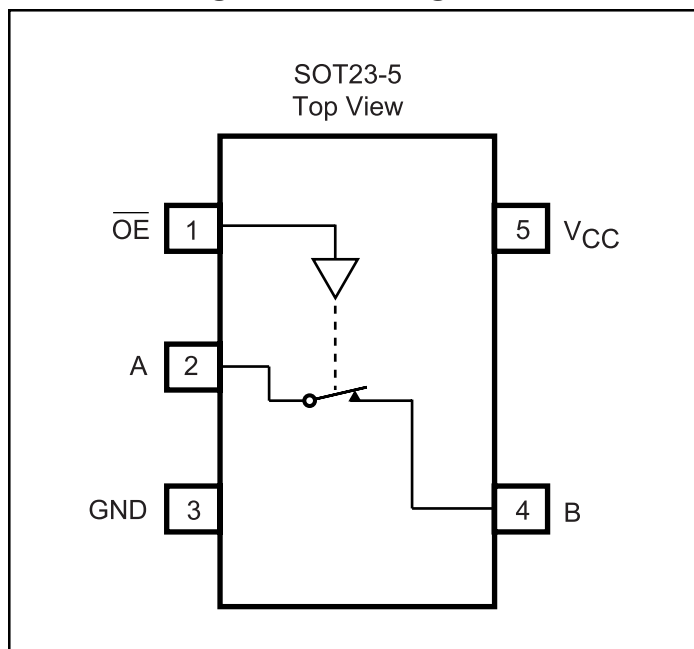
The PI5A125 is a single-pole single-throw (SPST), normally closed (NC) switch. The switch is open when $\overline{\text{OE}}$ is HIGH.

This switch conducts current equally well in either direction when on. When off, it blocks voltages up to V_{CC} .

The PI5A125 is fully specified with +5V, and +3.3V supplies. With +5V, it guarantees $<10\Omega$ on-resistance. On-resistance flatness is less than 5Ω over the specified range. The switch also guarantees fast switching speeds ($t_{\text{ON}} < 20\text{ns}$).

This product is available in a 5-pin SOT23 plastic package for operation over the industrial (-40°C to $+85^\circ\text{C}$) temperature range.

Functional Diagram, Pin Configuration



Electrical Specifications - Single +5V Supply ($V_{CC} = +5V \pm 10\%$, $GND = 0V$, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$)

Description	Parameter	Conditions	Temp. (°C)	Min. ⁽²⁾	Typ. ⁽¹⁾	Max. ⁽²⁾	Units
Analog Switch							
Analog Signal Range ⁽³⁾	V _{ANALOG}		Full	0		V _{CC}	V
On-Resistance	R _{ON}	V _{CC} = 4.5V, I _B = -30 mA, V _A = +2.5V	25 Full		8 12	10	
On-Resistance Flatness ⁽⁵⁾	R _{FLAT(ON)}	V _{CC} = 5V, I _B = -30 mA, V _A = 1V, 2.5V, 4V	25 Full		2.5 4	3.5	Ω
Off Leakage Current ⁽⁶⁾	I _{A(OFF)} or I _{B(OFF)}	V _{CC} = 5.5V, V _B = 0V, V _A = 4.5V	25 Full		0.20 80		nA
On Leakage Current ⁽⁶⁾	I _{A(ON)} or I _{B(ON)}	V ₊ = 5.5V, V _B = V _A = +4.5V	25 Full		0.20 80		
Logic Input							
Input High Voltage	V _{IH}	Guaranteed Logic High Level	Full	2			V
Input Low Voltage	V _{IL}	Guaranteed Logic Low Level				0.8	
Input Current with Input Voltage High	I _{INH}	V _{IN} =2.4V, all others = 0.8V		-1	0.005	1	μA
Input Current with Input Voltage Low	I _{INL}	V _{IN} =0.8V, all others = 2.4V					
Dynamic							
Turn-On Time	t _{ON}	V _{CC} = 5V, see Figure 1	25 Full		7 20	15	nc
Turn-Off Time	t _{OFF}	V _{COM} = ±3V, see Figure 2	25 Full		1 2	7 5	
Charge Injection ⁽³⁾	Q	C _L = 1nF, V _{GEN} = 0V, R _{GEN} = 0Ω, see Figure 2	25			10	pC
Off Isolation	OIRR	R _L = 50Ω, C _L = 5pF, f = 10 MHz, see Figure 3					dB
A or B Off Capacitance	C _(OFF)	f = 1kHz, see Figure 4				5.5	pF
On Capacitance	C _(ON)	f = 1kHz, see Figure 5				5.5	
-3dB Bandwidth	BW	R _L = 50Ω, see Figure 6				300	
Supply							
Power-Supply Range	V _{CC}		Full	2		6	V
Positive Supply Current	I _{CC}	V ₊ = 5.5V, V _{IN} = 0V or V _{CC} , All channels on or off				1	μA

Absolute Maximum Ratings

Voltages Referenced to GND	
V _{CC}	-0.5V to +7V
V _{OE} , V _A , V _B ⁽¹⁾	-0.5V to V _{CC} +2V
.....	or 30mA, whichever occurs first
Current (any terminal except A, B)	30mA
Current: A,B (pulsed at 1ms, 10% duty cycle)	120mA

Thermal Information

Continuous Power Dissipation	
SOT23-5 (derate 7mW/°C above +70°C)	550mW
Storage Temperature	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C

Note 1:

Signals on \overline{OE} , A, B exceeding V_{CC} or Gnd are clamped by internal diodes. Limit forward diode current to 30mA.

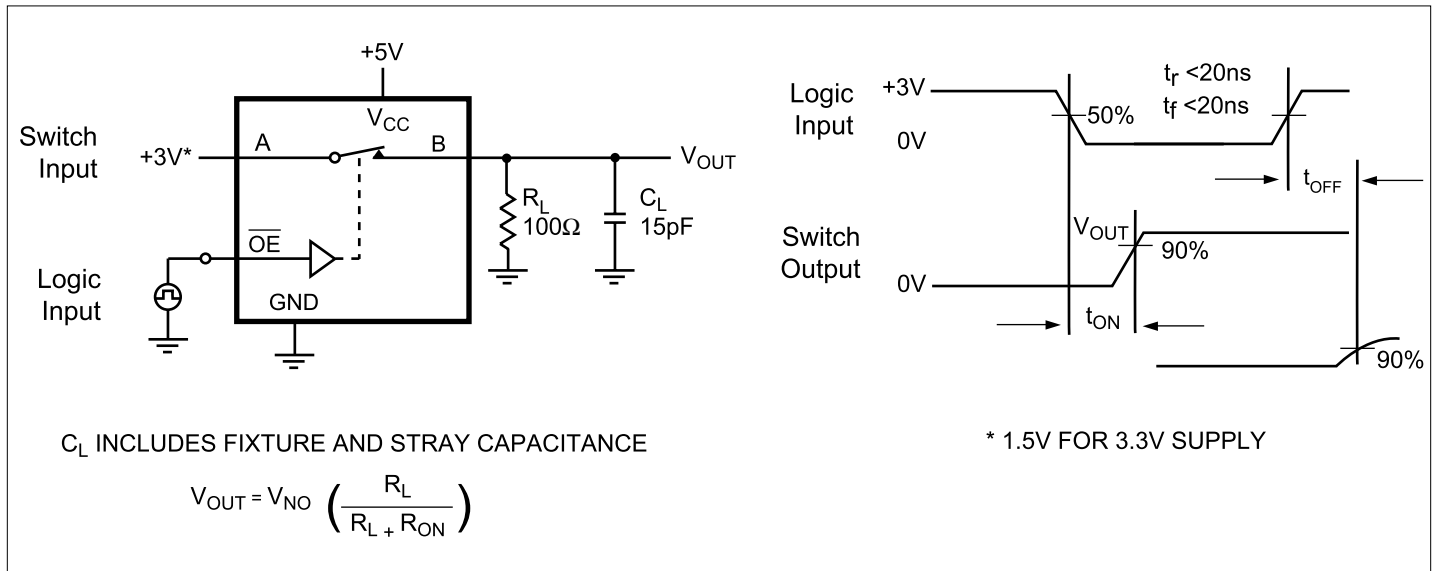
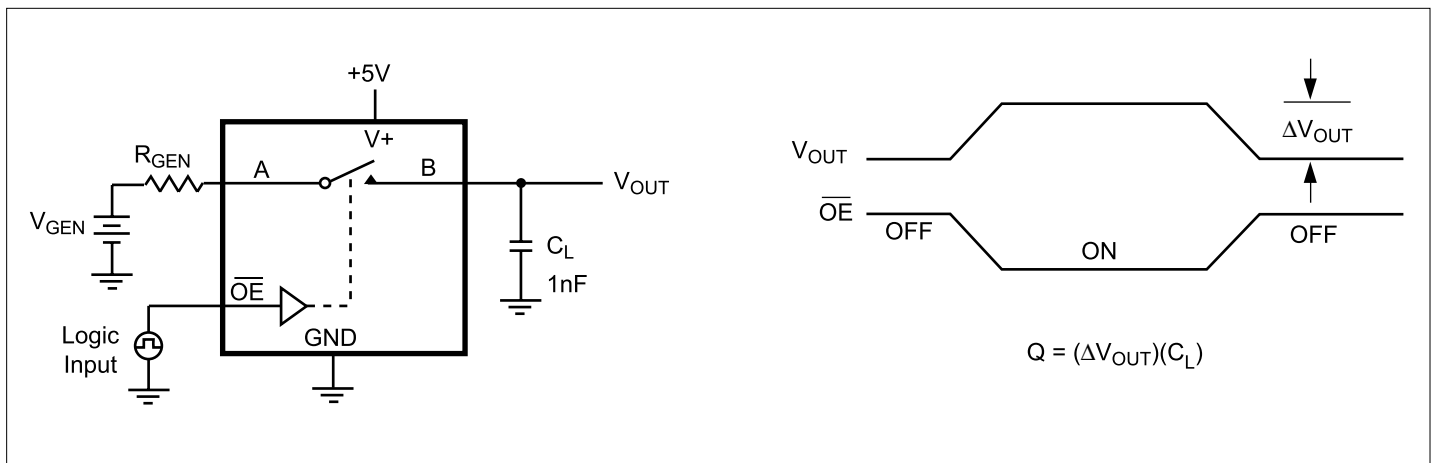
Caution: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

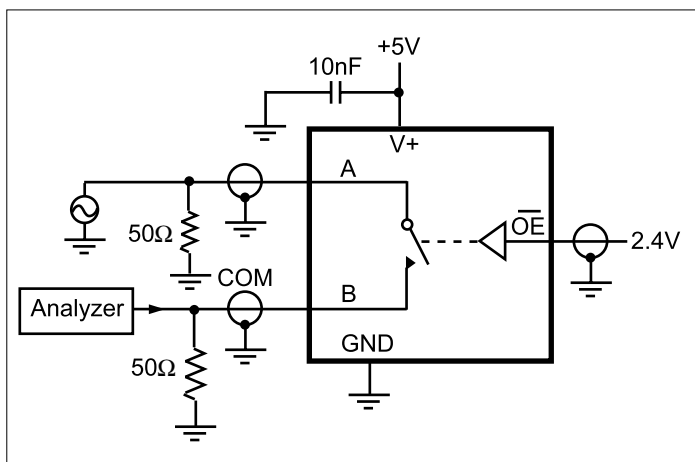
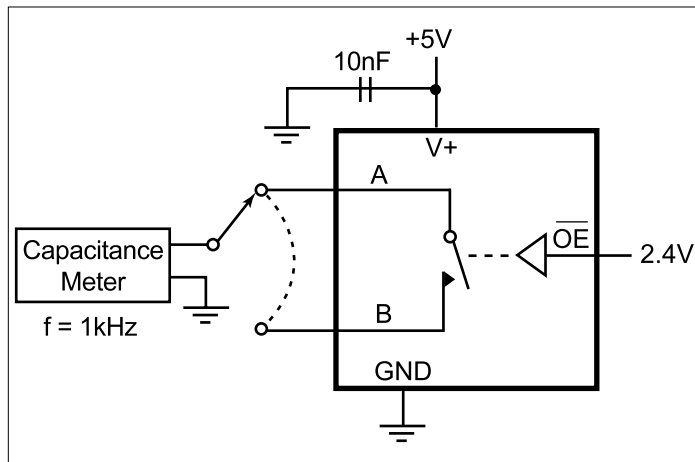
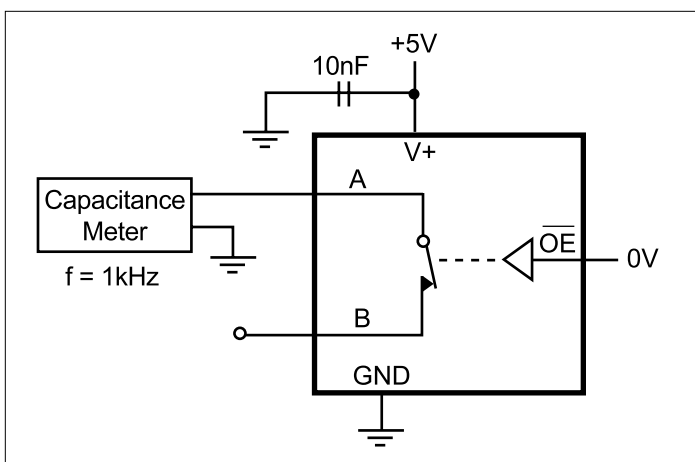
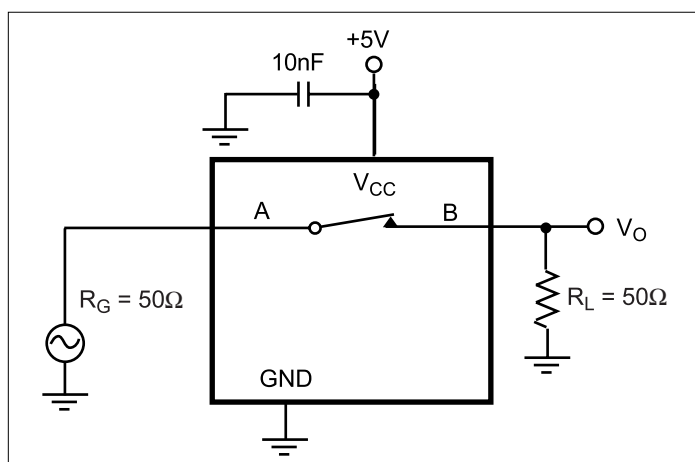
Electrical Specifications-Single +3.3V Supply (V_{CC} = +3.3V ± 10%, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V)

Parameter	Symbol	Conditions	Temp(°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units
Analog Switch							
Analog Signal Range ⁽³⁾	V _{ANALOG}			0		V _{CC}	V
On-Resistance	R _{ON}	V _{CC} =3V, I _B =-30mA, V _A =1.5V	25		12	18	Ω
			Full			22	
On-Resistance Flatness ^(3,5)	R _{FLAT(ON)}	V _{CC} = 3.3V, I _B = -30mA, V _A = 0.8V, 2.5V	25		0.5	4	
			Full			5	
Dynamic							
Turn-On Time	t _{ON}	V _{CC} =3.3V to V _{NO} or V _{NC} = 1.5V, Fig.1	25		15	25	ns
			Full			40	
Turn-Off Time	t _{OFF}		25		1.5	12	
			Full			20	
Charge Injection ⁽³⁾	Q	C _L =1nf, V _{GEN} = 0V, R _{GEN} = 0V, Fig.2	25		1.3	10	pC
Supply							
I _{CC}	Positive Supply Current	V _{CC} = 3.6V, V _{in} = 0V or V _{CC} All channels on or off	Full			1	μA

Notes:

- The algebraic convention, where the most negative value is a minimum and the most positive is a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- Guaranteed by design
- ΔR_{ON} = R_{ON} max - R_{ON} min
- Flatness is defined as the difference between the maximum and minimum value of on-resistance measured.
- Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
- Off Isolation = 20log₁₀ V_B / V_A. See figure 3.

Test Circuits/Timing Diagrams

Figure 1. Switching Time

Figure 2. Charge Injection

Test Circuits/Timing Diagrams (continued)

Figure 3. Off Isolation

Figure 4. Channel-Off Capacitance

Figure 5. Channel-On Capacitance

Figure 6. Bandwidth