

Product Information

Model number: MagLight PFMSS12XXXXXX Series

Description: 1x2 Magneto-Optic Switch

Selected Applications

- High Speed Protection Switching
- System Monitoring
- Re-configurable Add-drop
- Sub-system Modules


Selected Features

- Best Reliability, No Moving Parts
- Ultra Compact Size
- Ultra Fast Switching Speed
- Easy to Route - All Fibers on One Side
- Low Insertion Loss; Low PDL
- Extremely Stable Latching Mode
- Low Power Consumption



Schematic Diagram (unit: mm)

All fibers come out from one side.

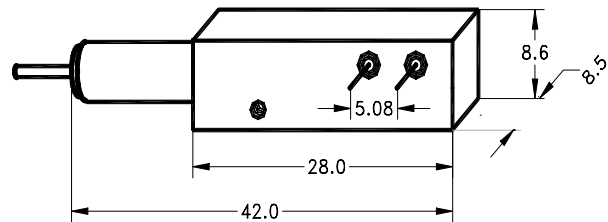

Optical Specifications

Parameters	Port 1 -> Port 2, Port 1-> Port 3				Unit
Wavelength Range	C Band		L Band		
	Typical	Max	Typical	Max	
Insertion Loss Over λ , T, SOP	0.7	1.0	0.7	1.0	dB
Durability	> 2 Billions	NA	> 2 Billions	NA	Cycles
Peak Cross Talk	-65	-60	-65	-60	dB
Cross Talk Over λ , T, SOP	-55	-50	-50	-45	dB
PDL	0.05	0.1	0.05	0.1	dB
PMD	0.05	0.1	0.05	0.1	ps
Return Loss	55	50	55	50	dB
Maximum Optical Power	500	NA	500	NA	mW
Switching Speed	0.2	0.4	0.2	0.4	mS
Repeatability	NA	± 0.02	NA	± 0.02	dB

Primanex Corporation


41946 Christy Street / Fremont, CA 94538 U.S.A

Tel: (510) 226 – 7252 / Fax: (510) 226 – 7258 / Email: sales@primanex.com

Mechanical Specifications

Parameters	Range	Unit
Package Dimension	28 (L) x 8.5 (W) x 8.6(H)	mm
Fiber Type	SMF 28	
Fiber Length	100 ± 5	cm
Connector	Optional	

Device Configuration

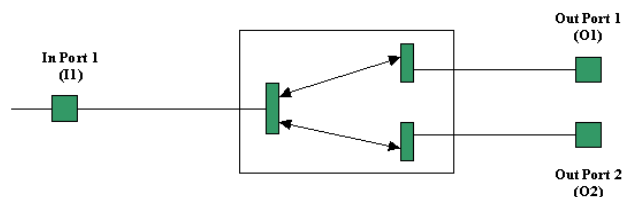

Electrical Specifications

Parameters	Range	Unit
Switching Voltage	4.5 ~ 5.5	V
Switching Current	<100	mA
Pulse Duration	<0.5	ms

Environmental Specifications

Parameters	Range	Unit
Operation Temperature	0 ~ 65	°C
Storage Temperature	-40 ~ 85	°C
Humidity	0 ~ 85%	RH

1x2 Switch Performance: I1 = In Port 1, O1 = Out Port 1, O2 = Out Port 2

