
LED Driver IC**PT6960**

DESCRIPTION

PT6960 is an LED Controller driven on a 1/6 to 1/8 duty factor. Twelve to ten segment output lines, five to seven grid output lines, one display memory, control circuit, key scan circuit are all incorporated into a single chip to build a highly reliable peripheral device for a single chip microcomputer. Serial data is fed to PT6960 via a four-line serial interface. Housed in a 32-pin SO Package, PT6960 pin assignments and application circuit are optimized for easy PCB Layout and cost saving advantages.

FEATURES

- CMOS Technology
- Low Power Consumption
- Multiple Display Modes (10 segment, 7 Grid to 12 segment, 5 Grid)
- Key Scanning (10 x 3 Matrix)
- 8-Step Dimming Circuitry
- Serial Interface for Clock, Data Input, Data Output, Strobe Pins
- Available in 32-pin, SOP Package


APPLICATION

- Micro-computer Peripheral Device
- VCR set
- Combi set

LED Driver IC

PT6960


BLOCK DIAGRAM

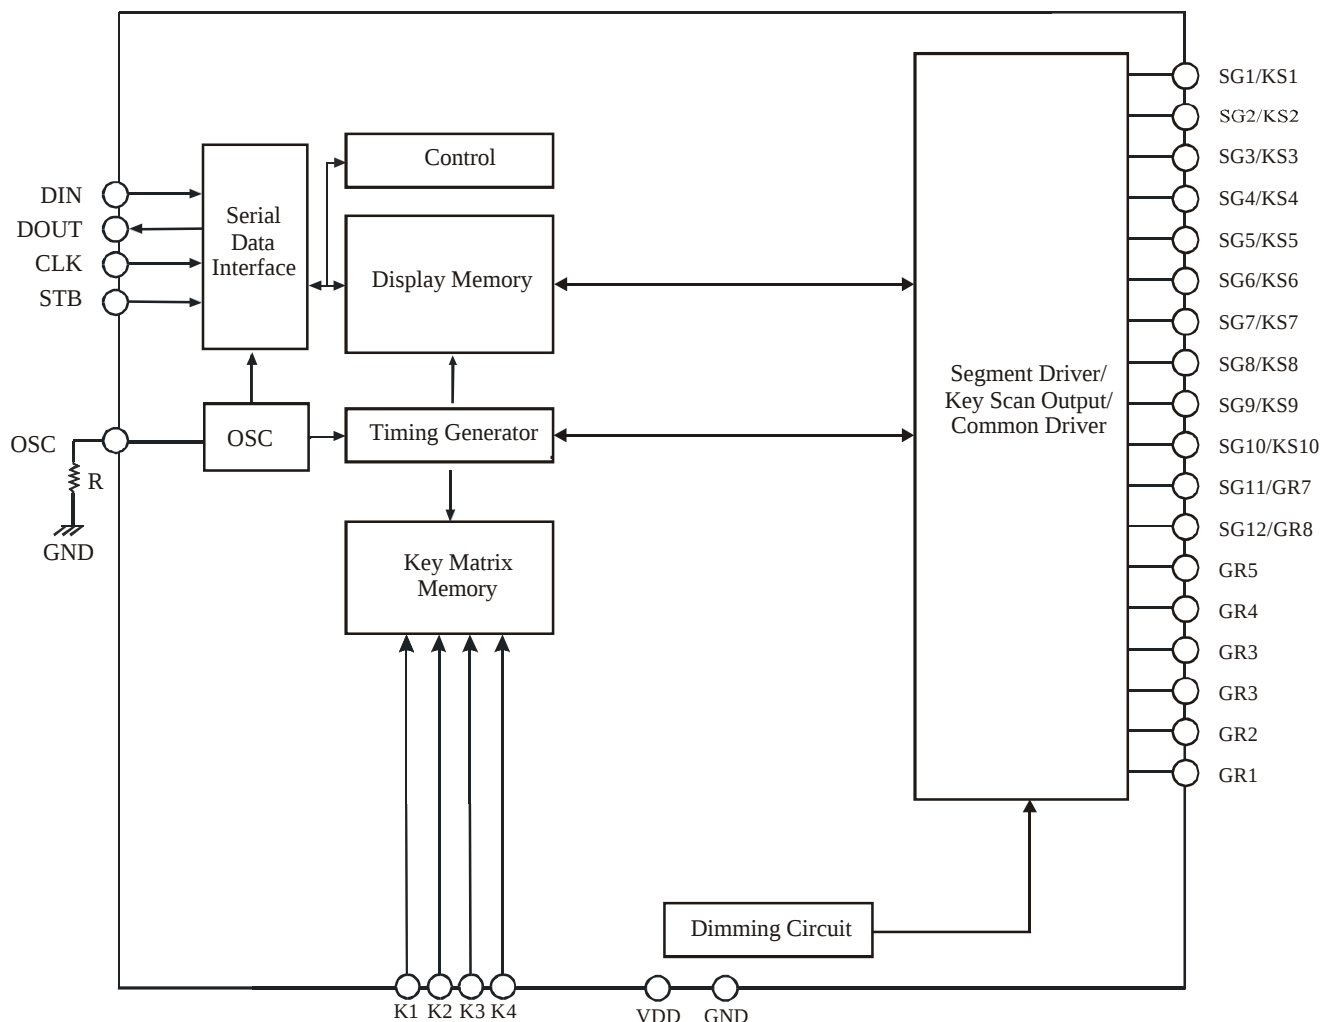

LED Driver IC

PT6960


PIN CONFIGURATION

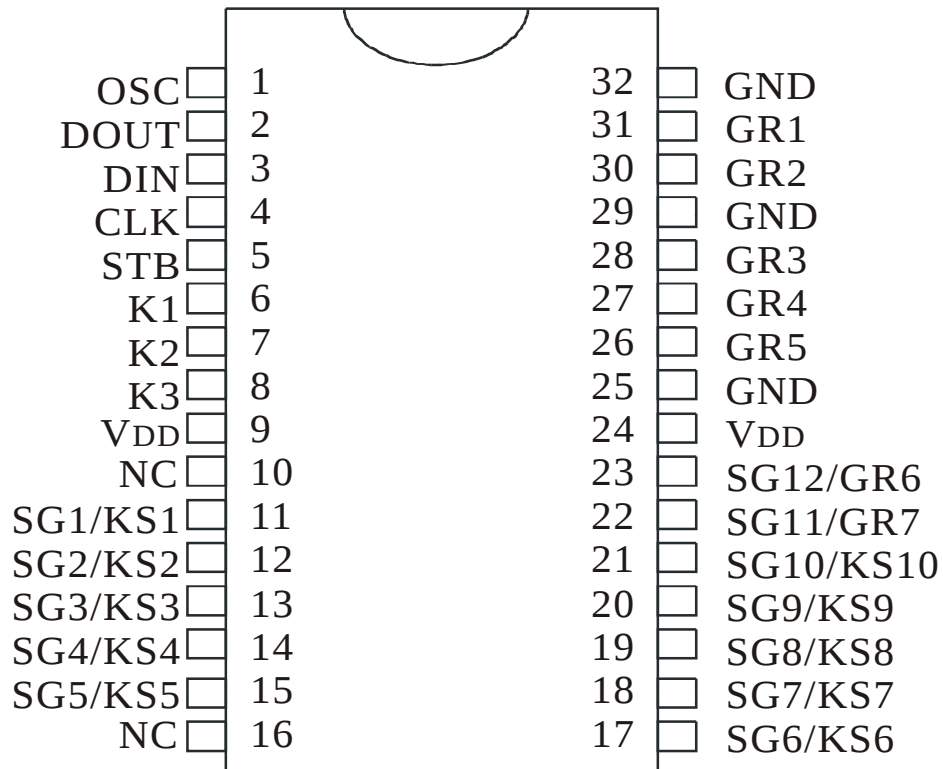

LED Driver IC

PT6960

APPLICATION CIRCUIT

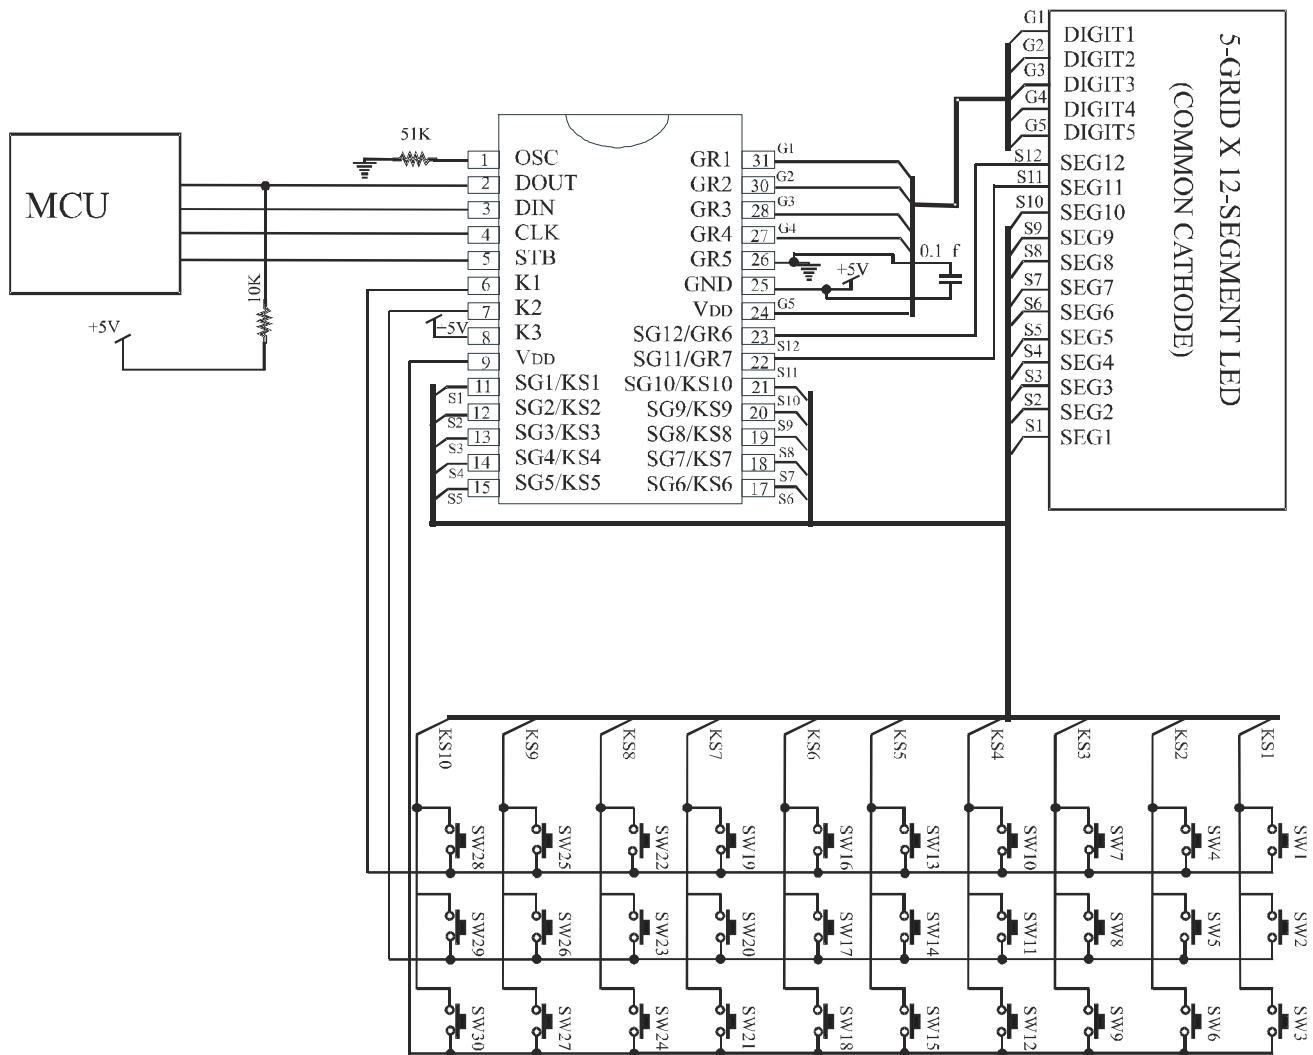

LED Driver IC

PT6960

COMMON CATHODE TYPE LED PANEL :



Note: 1. The capacitor (0.1 μ F) connected between the GND and the VDD pins must be located as close as possible to the PT6960 chip.

2. It is strongly suggested that the NC pin (pins 10, 16) be connected to the GND.

3. The PT6960 power supply is separate from the application system power supply.