

Precision Wide Bandwidth Analog Switch

Features

- Rail-To-Rail operation
- Pin-compatible with 3125 Bus Switch & 74 series 125
- Single-Supply operation: 2V to 6V
- Low ON-resistance: 8-ohms typical @ 5V
- Tight match between channels: 0.9-ohm typical
- R_{ON} flatness: 3-ohms typical
- Low power consumption: 0.5 μ -ohm typical
- High Speed, T_{ON} = 8ns typical
- High-current channel capability: >100mA
- Wide bandwidth: >200 MHz

Applications

- Instrumentation, ATE
- Audio Switching and Routing
- Telecommunications Systems
- Data Communications
- Battery-Powered Systems
- Replaces Mechanical Relays

Description

Pericom PI5A101 is an all-purpose analog switch designed for single-supply operation from +2V to +6V. This switch is ideal for audio, video, and data switching and routing.

The PI5A101 is a quad SPST (single-pole, single-throw) NC (normally closed) function.


When on, each switch conducts current equally well in either direction. When off, they block voltages up to the power-supply rails.

The PI5A101 is fully specified with +5V and +3.3V supplies. With +5V the R_{ON} is 8 ohms typical, making it ideal for replacing mechanical relays in data communications, test equipment, and instrumentation applications. Matching between channels is better than 2 ohms. R_{ON} flatness is better than 4 ohms over the specified range.

These analog switches also offer wide bandwidths (>200 MHz high speed (T_{ON} >15ns), and low charge injection (Q >10pC).


The PI5A101 is available in the narrow-body 14-pin small SOIC and 16-pin QSOP packages for operation over the industrial (-40°C to $+85^{\circ}\text{C}$) temperature range.

Functional Diagrams, Pin Configurations and Truth Tables

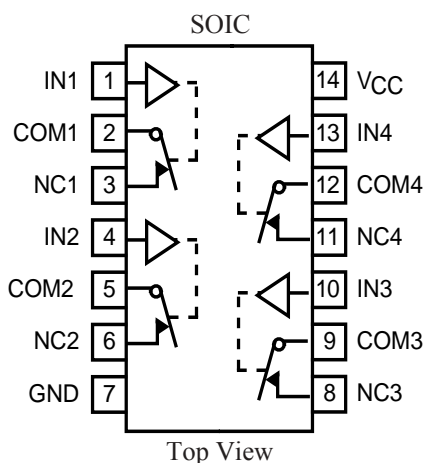

Switches show for logic "0" input
NIC = Not Internally Connected

Logic	Switch
0	ON
1	OFF

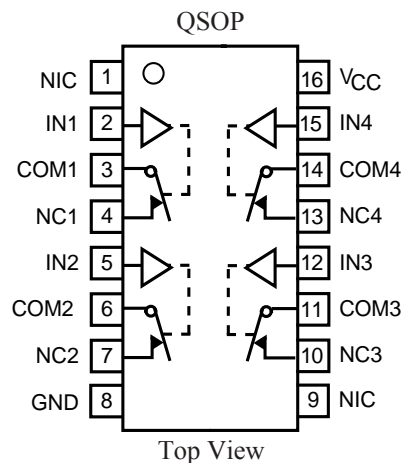

Ordering Information

P/N	Package
PI5A101W	Narrow Body SOIC-14
PI5A101Q	QSOP-16

Electrical Specifications - Single +5V Supply ($V_{CC} = +5V \pm 10\%$, $GND = 0V$, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$)

Description	Parameter	Conditions	Temp. (°C)	Min. ⁽²⁾	Typ. ⁽¹⁾	Max. ⁽²⁾	Units
Analog Switch							
Analog Signal Range ⁽³⁾	V _{ANALOG}		Full	0		V _{CC}	V
On-Resistance	R _{ON}	V _{CC} = 4.5V, I _{COM} = -30mA, V _{NO} or V _{NC} = +2.5V	25		8	10	ohm
			Full			18	
On-Resistance Match Between Channels ⁽⁴⁾	ΔR _{ON}		25		0.9	2	
			Full			4	
On-Resistance Flatness ⁽⁵⁾	R _{FLAT(ON)}	V _{CC} = 5V, I _{COM} = -30mA, V _{NO} or V _{NC} = 1V, 2.5V, 4V	25		3	4	
			Full			5	
NO or NC Off Leakage Current ⁽⁶⁾	I _{NO(OFF)} or I _{NC(OFF)}	V _{CC} = 5.5V,V _{COM} = 0V, V _{NO} or V _{NC} = 4.5V	25		0.05		nA
			Full	-80		80	
COM Off Leakage Current ⁽⁶⁾	I _{COM(OFF)}	V ₊ = 5.5V, V _{COM} = +4.5V V _{NO} or V _{NC} = ±0V	25		0.05		
			Full	-80		80	
COM On Leakage Current ⁽⁶⁾	I _{COM(ON)}	V _{CC} = 5.5V, V _{COM} = +4.5V V _{NO} or V _{NC} = +4.5V	25		0.07		
			Full	-80		80	
Logic Input							
Input High Voltage	V _{INH}	Guaranteed Logic High Level	Full	2			V
Input Low Voltage	V _{INL}	Guaranteed Logic Low Level				0.8	
Input Current with Input Voltage High	I _{INH}	V _{IN} =2.4V, all others = 0.8V		-1	0.005	1	μA
Input Current with Input Voltage Low	I _{INL}	V _{IN} =0.8V, all others = 2.4V					

Electrical Specifications - Single +5V Supply ($V_{CC} = +5V \pm 10\%$, $GND = 0V$, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$) (continued)

Dynamic							
Turn-On Time	t _{ON}	V _{CC} = 5V, see Figure 1	25		8	15	ns
			Full			20	
Turn-Off Time	t _{OFF}		25		3.5	7	
			Full			10	
Charge Injection ⁽³⁾	Q	C _L = 1nF, V _{GEN} = 0V, R _{GEN} = 0ohm, see Figure 2	25		7	10	pC
Off Isolation	OIRR	R _L = 50ohm, C _L = 5pF, f = 10 MHz, see Figure 3			-55		dB
Crosstalk ⁽⁸⁾	I _{COM(OFF)}	R _L = 50ohm, C _L = 5pF, f = 10 MHz, see Figure 4			-92		
NC or NO Capacitance	C _(OFF)	f = 1kHz, see Figure 5			8		pF
COM Off Capacitance	C _{COM(OFF)}				8		
COM On Capacitance	C _{COM(ON)}	f = 1kHz, see Figure 6			14		
-3dB Bandwidth	BW	R _L = 50ohm, see Figure 7	Full		230		MHz
Distortion ⁽⁹⁾	D	R _L = 10kohm			0.03		%
Supply							
Power-Supply Range	V _{CC}		Full	2		6	V
Positive Supply Current	I _{CC}	V _{CC} = 5.5V, V _{IN} = 0V or V _{CC} , All channels on or off				1	μA

Absolute Maximum Ratings

Voltages Referenced to GND	
V_{CC}	-0.5V to +7V
V_{IN} , V_{COM} , $V_{NC}^{(1)}$	-0.5V to $V_{CC} + 2V$
.....	or 30mA, whichever occurs first
Current (any terminal except COM, NO, NC)	30mA
Current: COM, NO, NC (pulsed at 1ms, 10% duty cycle)	120mA

Thermal Information

Continuous Power Dissipation	
Narrow SO & QSOP (derate 8.7mW/°C above +70°C)	650mW
Storage Temperature	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C

Note 1.

Signals on NC, COM, or IN exceeding V_{CC} or GND are clamped by internal diodes. Limit forward diode current to 30mA.

Caution: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

Electrical Specifications-Single+3.3V Supply ($V_{CC} = +3.3V \pm 10\%$, $GND = 0V$, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$)


Parameter	Symbol	Conditions	Temp(°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units
Analog Switch							
Analog Signal Range ⁽³⁾	V _{ANALOG}		Full	0		V _{CC}	V
On-Resistance	R _{ON}	V _{CC} = 3V, I _{COM} = −30mA, V _{NO} or V _{NC} = 1.5V	25		12	18	ohm
			Full			28	
On-Resistance Match Between Channels ⁽⁴⁾	ΔR _{ON}	V _{CC} = 3.3V, I _{COM} = −30mA, V _{NO} or V _{NC} = 0.8V, 2.5V	25		1	2	
			Full			4	
On-Resistance Flatness ^(3,5)	R _{FLAT(ON)}		25		4	10	
			Full			12	
Dynamic							
Turn-On Time	t _{ON}	V _{CC} =3.3V, V _{NO} or V _{NC} = 1.5V see Figure 1	25		14	25	ns
			Full			40	
Turn-Off Time	t _{OFF}		25		5	12	
			Full			20	
Charge Injection ⁽³⁾	Q	C _L =1nf, V _{GEN} = 0V, R _{GEN} = 0V, Fig.2	25		5	10	pC
Supply							
Positive Supply Current	I _{CC}	V _{CC} = 3.6V, V _{IN} = 0V or V _{CC} All channels on or off	Full			1	μA

Notes:


- The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- Guaranteed by design
- $\Delta R_{ON} = R_{ON\ MAX} - R_{ON\ MIN}$
- Flatness is defined as the difference between the maximum and minimum value of on-resistance measured.
- Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
- Off Isolation = $20\log_{10} V_B / V_A$. See Figure 3.
- Between any two switches. See Figure 4.
- $D = R_{FLAT(ON)} / R_L$.

Typical Operating Characteristics ($T_A = +25^\circ\text{C}$, unless otherwise noted)


R_{ON} vs. V_{COM}

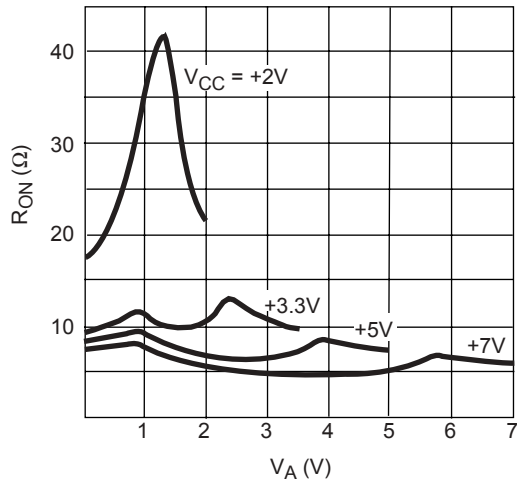


R_{ON} vs. V_{COM} and Temperature

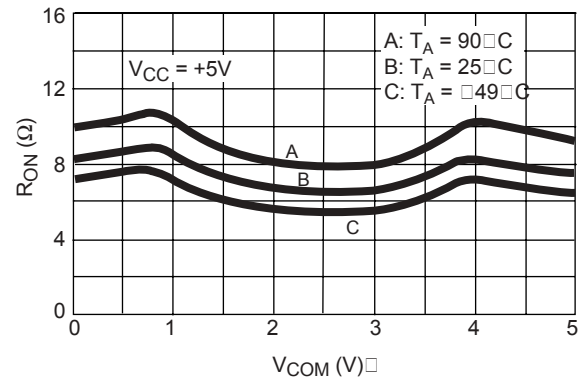


Leakage Currents vs. Analog Voltage

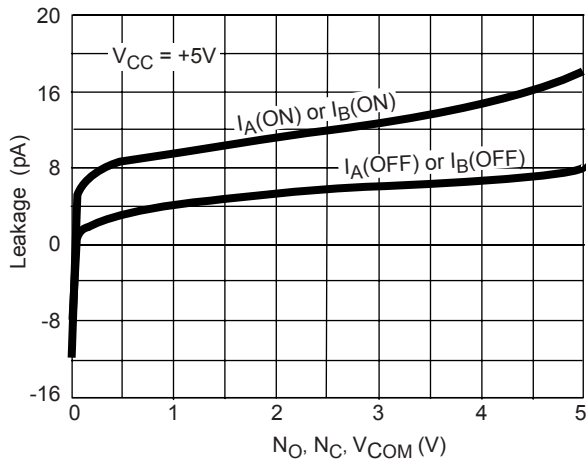


Leakage Current vs. Temperature






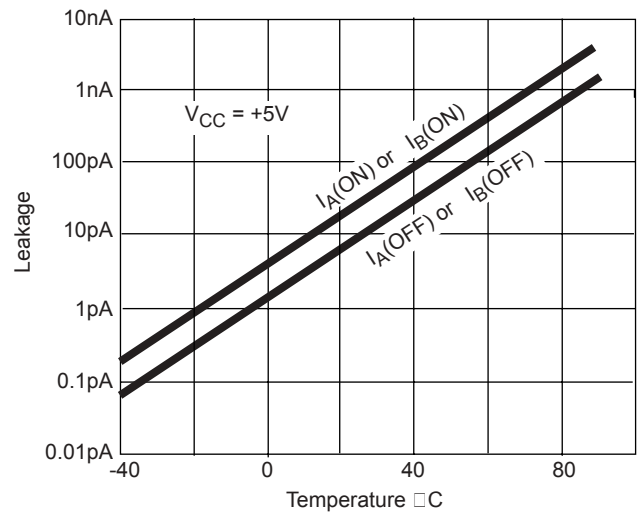


Charge Injection vs. Analog Voltage

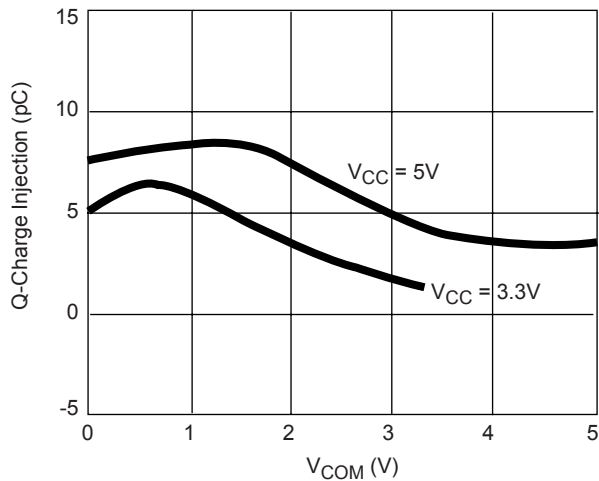

Crosstalk and Off-Isolation vs. Frequency

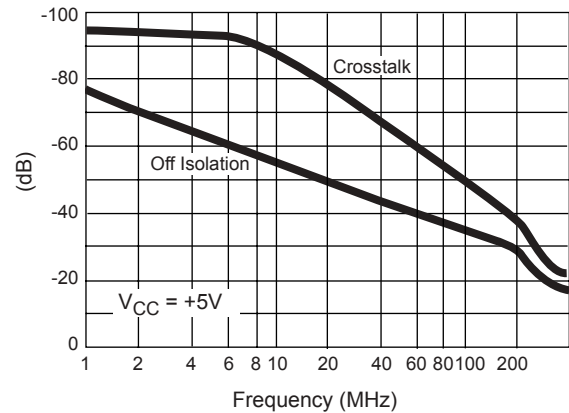

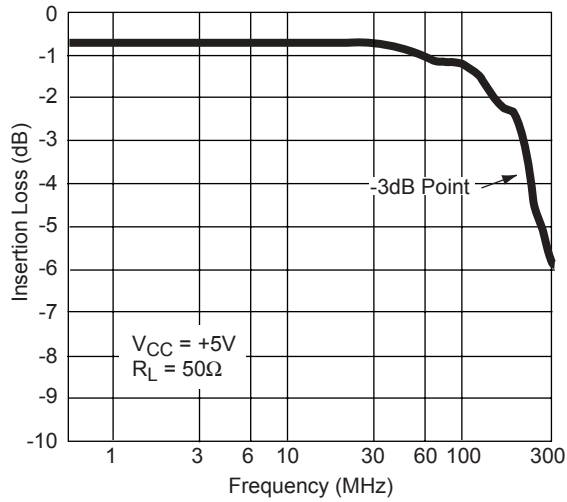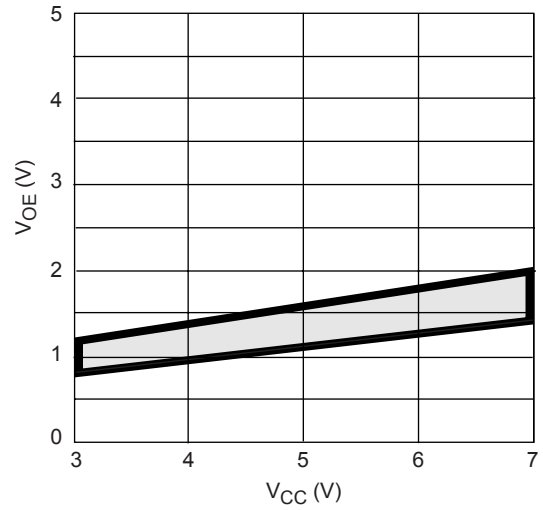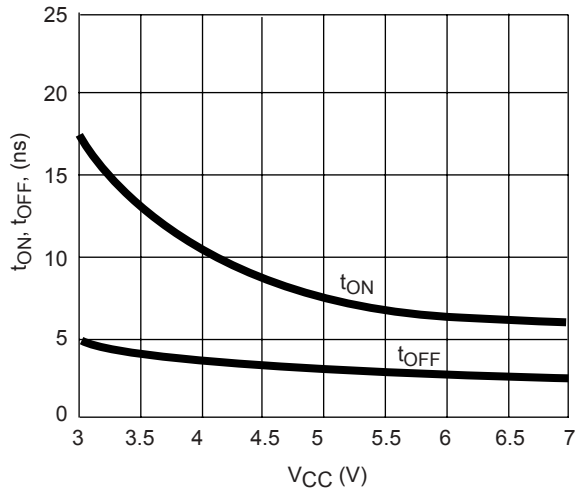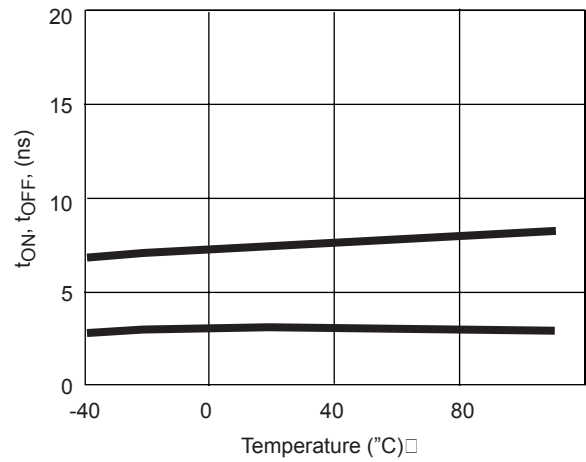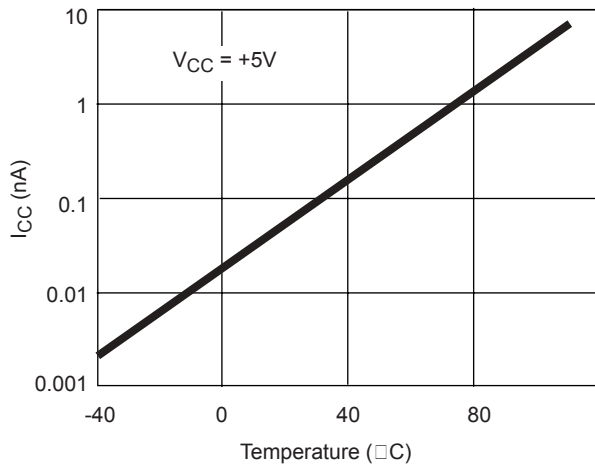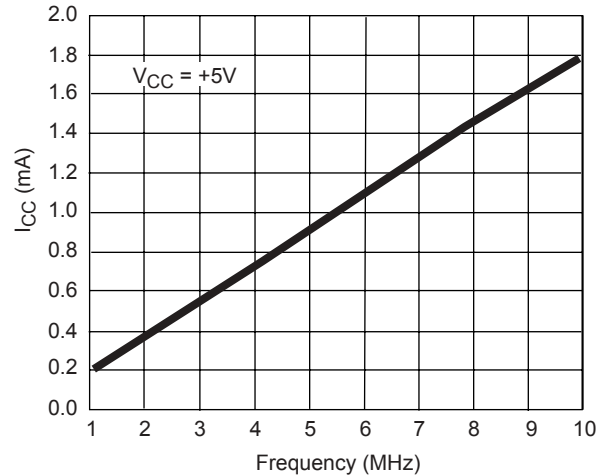Insertion Loss vs. Frequency

Input Switching Threshold vs. Supply Voltage

Switching Times vs. V_{CC}

Switching Times vs. Temperature

Supply Current vs. Temperature

Supply Current vs. Input Switching Frequency


Test Circuits/Timing Diagrams

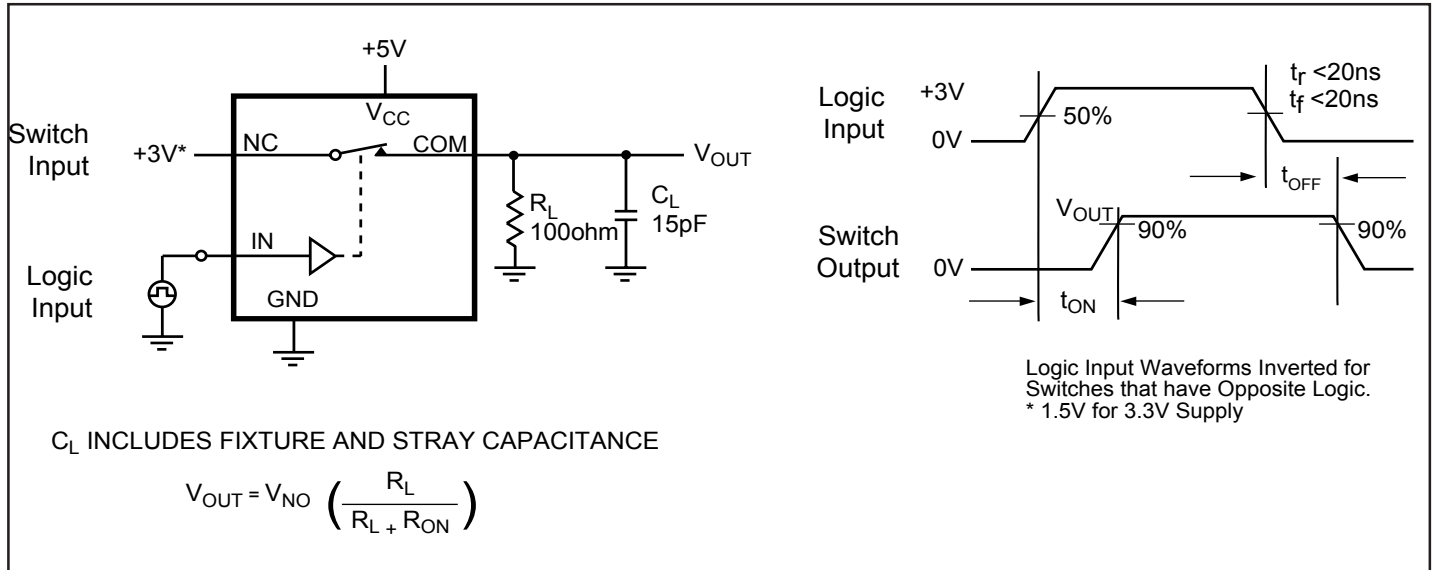


Figure 1. Switching Time

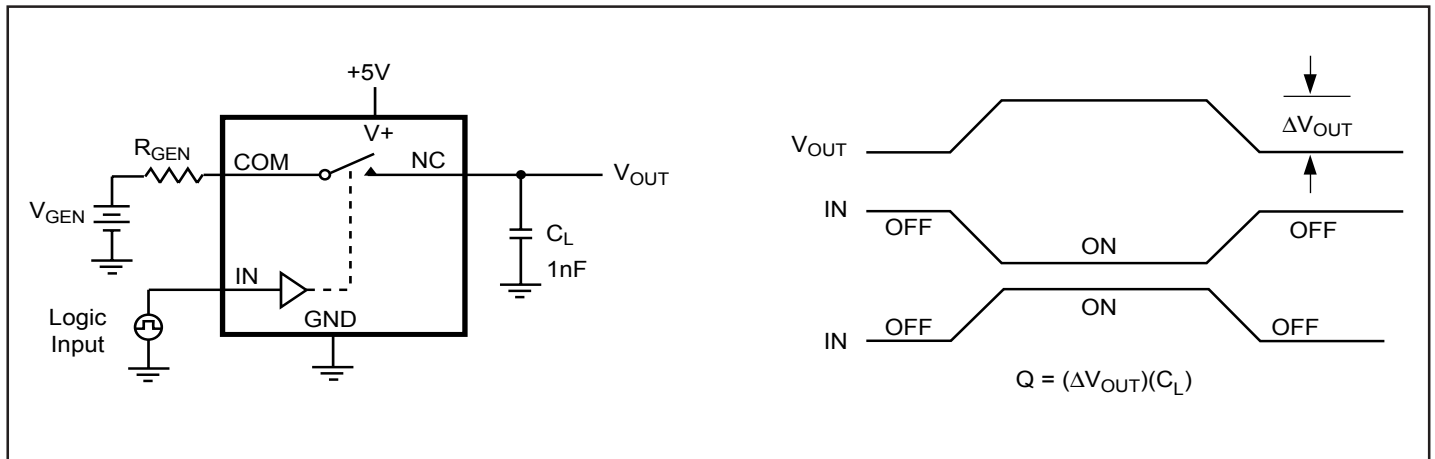


Figure 2. Charge Injection

Test Circuits/Timing Diagrams (continued)

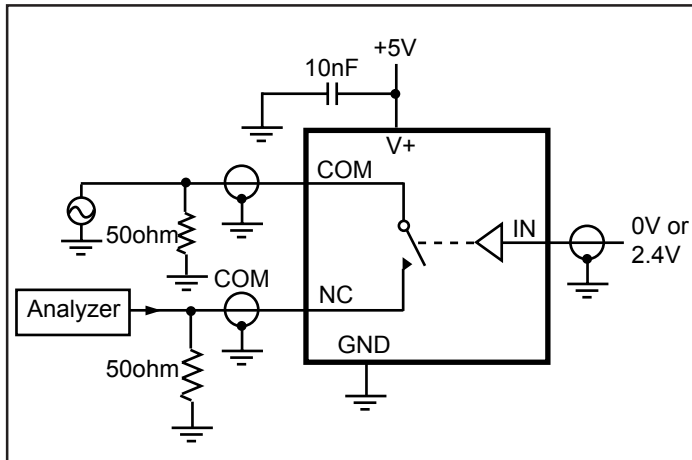


Figure 3. Off Isolation

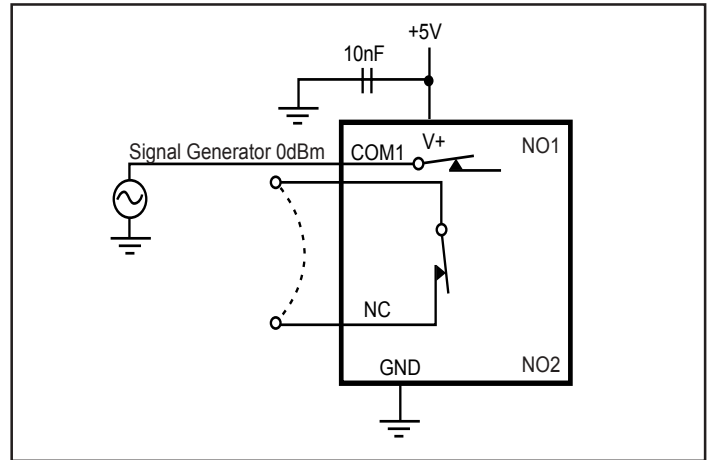


Figure 4. Crosstalk

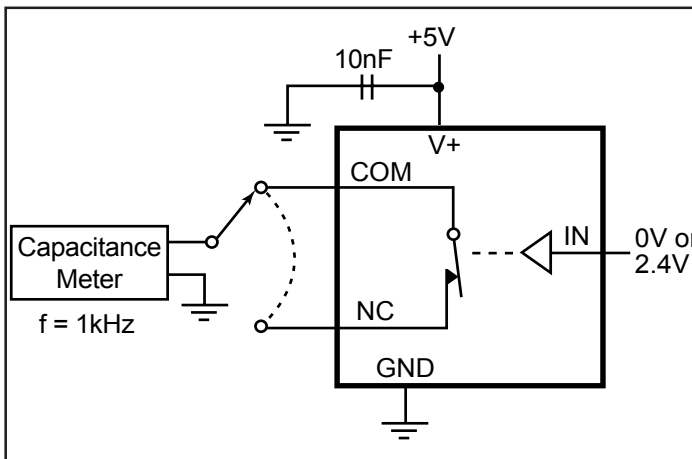


Figure 5. Channel-Off Capacitance

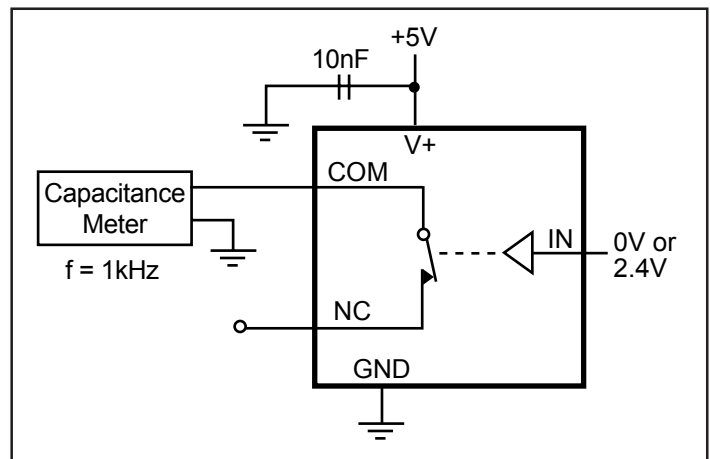


Figure 6. Channel-On Capacitance

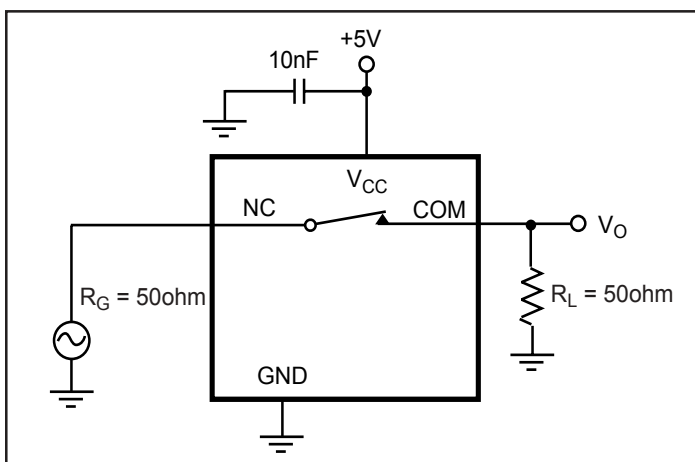


Figure 7. Bandwidth

Figure 1: Mechanical drawing of the 16-pin connector. The drawing includes three views: a top view, a side view, and a cross-sectional view. The top view shows a rectangular component with 16 pins, dimensions for pin pitch (.386/.393), overall width (9.80/10.00), and height (.149/.157). The side view shows the profile of the component with dimensions for pin height (.0155/.0260), pin pitch (.050 BSC), and overall height (.053/.068). The cross-sectional view shows the internal structure of the pins and the component body, with dimensions for pin diameter (.0099/.0196), pin height (.0075/.0098), and overall width (.2284/.2440). A legend indicates that dimensions in boxes are in millimeters.

Part Number	Package	Package Code	Temperature
PI5A101	16-Pin, QSOP	Q16	-40°C to +85°C
PI5A101	16-Pin, SOIC	W16	

9