


Motherboard Clock Generator for 815 with 133MHz FSB


FEATURES

- Generates all clock frequencies for INTEL 815 Chip sets.
- Supports 2 CPU clocks, 9 high-speed SDRAM clocks for 2-DIMM applications and 7 PCI clocks.
- Three 3.3V 3V66MHz clocks.
- One 24/48MHz clock and two 48MHz clocks.
- One double-strength 2.5V IOAPIC clock.
- One double-strength 14.318MHz reference clock.
- Support 2-wire I2C serial bus interface with built-in Vendor ID, Device ID and Revision ID.
- Single byte micro-step linear Frequency programming via I2C with glitch free and smooth switching.
- Built-in programmable watchdog timer up to 63 seconds with 1-second interval. It will generate a LOW reset output when timer expired.
- Spread Spectrum $\pm 0.25\%$ center spread, 0 to 0.5% downspread.
- 50% duty cycle with low jitter.
- Available in 300 mil 48 pin SSOP.

BLOCK DIAGRAM

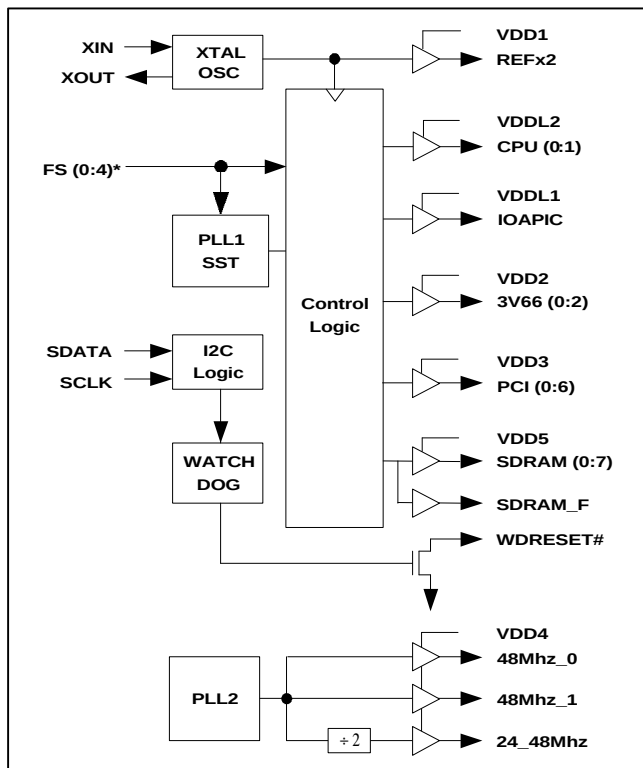

PIN CONFIGURATION

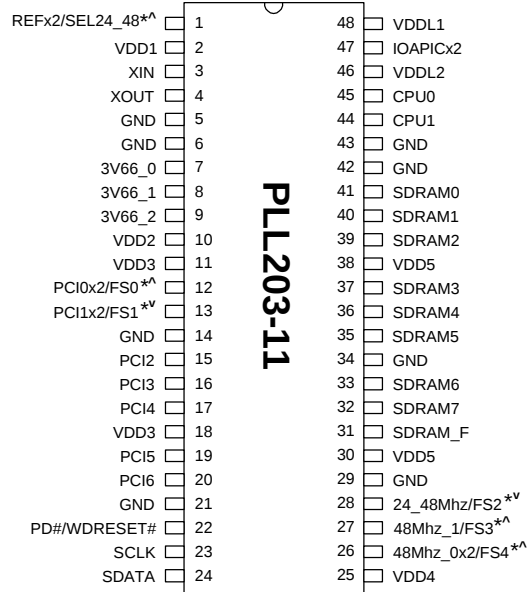

Note: v: pull down, ^: Pull up, #: Active low,
*: Bi-directional latched at power-up

POWER GROUP

- VDD1: REF, XIN, XOUT, PLL CORE
- VDD2: 3V66(0:2) VDD3: PCI(0:6)
- VDD4: 48MHz_0, 48MHz_1 & 24_48MHz
- VDD5: SDRAM(0:7) & SDRAM_F
- VDDL1: IOAPIC VDDL2: CPU(0:1)

KEY SPECIFICATIONS

- Cycle to Cycle jitter:
 - 1) 250ps: CPU, SDRAM
 - 2) 500ps: APIC, 48Mhz, 3V66, PCI
- Pin to Pin Skew:
 - 1) 250ps: CPU, 3V66
 - 2) 500ps: SDRAM, APIC, PCI, 48Mhz
- Clock Offset (@CPU=100Mhz):
 - 1) 4.5~5.5ns: CPU-SDRAM, CPU-3V66
 - 2) 1.5~3.5ns: 3V66-PCI
 - 3) -0.5~0.5ns: SDRAM-3V66, PCI-APIC

Motherboard Clock Generator for 815 with 133MHz FSB
PIN DESCRIPTIONS

Name	Number	Type	Description
REFx2/SEL24_48	1	B	At power up, this pin will select 24MHz (when high) or 48MHz (when low) for pin 28 output. After input sampling, this pin is double strength REF output. This pin has internal pull-up resistor.
XIN	3	I	14.318Mhz crystal input to be connected to one end of the crystal.
XOUT	4	O	14.318Mhz crystal output.
3V66(0:2)	7,8,9	O	66MHz clock output. (See Frequency Selection table on page3).
SDRAM(0:7), SDRAM_F	41,40,39,37, 36,35,33,32,31	O	3.3V SDRAM Clocks with frequencies defined in Frequency Selection table. SDRAM_F is free running clock output.
PCI0x2/FS0, PCI1x2/FS1	12,13	B	PCI clock output. These pins latch FS(0:1) value at power-on. (See Frequency Selection table on page 3). FS0 has internal pull up resistor, while FS1 has internal pull down resistor.
PCI(2:6)	15,16,17,19,20	O	PCI bus clock output. (See Frequency Selection table on page 3)
48MHz_0x2/FS4	26	B	Double strength 48MHz clock output. This pin latches FS4 value at power-on. (See Frequency selection table on page3). This pin has internal pull up resistor.
48MHz_1/FS3	27	B	48MHz clock output. This pin latches FS3 value at power-on. (See Frequency selection table on page3). This pin has internal pull up resistor.
24_48MHz/FS2	28	B	At power up, this pin is input pin and will determine the CPU clock frequency. It has internal pull down resistor.
SDATA	24	B	Serial data inputs for serial interface port.
SCLK	23	I	
PD#/WDRESET#	22	B	Power Down Control input. When low, it will disable all clock outputs including internal VCO and crystal clock. The enable of the watchdog timer masks the PD action.
CPU(0:1)	45,44	O	2.5V CPU Clocks with frequencies defined in Frequency Selection table on page3.
IOAPICx2	47	O	2.5V double strength IOAPIC clock output.
VDD1	2	P	Power supply for REF, crystal oscillator, PLL Core.
VDD2	10	P	Power supply for 3V66(0:2).
VDD3	11,18	P	Power supply for PCI (0:6).
VDD4	25	P	Power supply for 48MHz or 24_48MHz.
VDD5	30,38	P	Power supply for SDRAM (0:7), SDRAM_F.
VDDL1	48	P	Power supply for IOAPIC 2.5V.
VDDL2	46	P	Power supply for CPU (0:1) 2.5V.
GND	5,6,14,21,29, 34,42,43	P	Ground.

Motherboard Clock Generator for 815 with 133MHz FSB
FREQUENCY (MHz) SELECTION TABLE


I2C Byte0 Bit2	FS3	FS2	FS1	FS0	CPU	SDRAM	3V66	PCI	IOAPIC	Spread Spectrum Modulation
0 default	0	0	0	0	66.6	100.0	66.6	33.3	16.6	0 to -0.5%
	0	0	0	1	66.8	100.3	66.8	33.4	16.7	±0.25%
	0	0	1	0	68.6	103.0	68.6	34.3	17.1	±0.25%
	0	0	1	1	71.3	107.0	71.3	35.6	17.8	±0.25%
	0	1	0	0	100.0	100.0	66.6	33.3	16.6	0 to -0.5%
	0	1	0	1	100.3	100.3	66.8	33.4	16.7	±0.25%
	0	1	1	0	103.0	103.0	68.6	34.3	17.1	±0.25%
	0	1	1	1	107.0	107.0	71.3	35.6	17.8	±0.25%
	1	0	0	0	133.3	133.3	66.6	33.3	16.6	0 to -0.5%
	1	0	0	1	133.7	133.7	66.8	33.4	16.7	±0.25%
	1	0	1	0	137.3	137.3	68.6	34.3	17.1	±0.25%
	1	0	1	1	120.0	120.0	60.0	30.0	15.0	±0.25%
	1	1	0	0	133.3	100.0	66.6	33.3	16.6	0 to -0.5%
	1	1	0	1	133.7	100.3	66.8	33.4	16.7	±0.25%
	1	1	1	0	137.3	103.0	68.6	34.3	17.1	±0.25%
	1	1	1	1	120.0	90.0	60.0	30.0	15.0	±0.25%
1	0	0	0	0	136.0	136.0	68.0	34.0	17.0	±0.25%
	0	0	0	1	140.0	140.0	70.0	35.0	17.5	±0.25%
	0	0	1	0	142.6	142.6	71.3	35.6	17.8	±0.25%
	0	0	1	1	145.3	145.3	72.6	36.3	18.1	±0.25%
	0	1	0	0	136.0	102.0	68.0	34.0	17.0	±0.25%
	0	1	0	1	140.0	105.0	70.0	35.0	17.5	±0.25%
	0	1	1	0	142.6	107.0	71.3	35.6	17.8	±0.25%
	0	1	1	1	145.3	109.0	72.6	36.3	18.1	±0.25%
	1	0	0	0	146.6	146.6	73.3	36.6	18.3	±0.25%
	1	0	0	1	153.3	153.3	76.6	38.3	19.1	±0.25%
	1	0	1	0	160.0	160.0	80.0	40.0	20.0	±0.25%
	1	0	1	1	166.6	166.6	83.3	41.6	20.8	±0.25%
	1	1	0	0	146.6	110.0	73.3	36.6	18.3	±0.25%
	1	1	0	1	160.0	120.0	80.0	40.0	20.0	±0.25%
	1	1	1	0	166.6	125.0	83.3	41.6	20.8	±0.25%
	1	1	1	1	200.0	200.0	100.0	50.0	25.0	±0.25%

Motherboard Clock Generator for 815 with 133MHz FSB
FREQUENCY (MHz) SELECTION TABLE BY GROUP TIMING

Group Timing (CPU:SDRAM:3V66)	FS4	FS3	FS2	FS1	FS0	CPU	SDRAM	3V66	PCI	IOAPIC
A (66:100:66)	0	0	0	0	0	66.6	100.0	66.6	33.3	16.6
	0	0	0	0	1	66.8	100.3	66.8	33.4	16.7
	0	0	0	1	0	68.6	103.0	68.6	34.3	17.1
	0	0	0	1	1	71.3	107.0	71.3	35.6	17.8
B (100:100:66)	0	0	1	0	0	100.0	100.0	66.6	33.3	16.6
	0	0	1	0	1	100.3	100.3	66.8	33.4	16.7
	0	0	1	1	0	103.0	103.0	68.6	34.3	17.1
	0	0	1	1	1	107.0	107.0	71.3	35.6	17.8
C (133:133:66)	0	1	0	1	1	120.0	120.0	60.0	30.0	15.0
	0	1	0	0	0	133.3	133.3	66.6	33.3	16.6
	0	1	0	0	1	133.7	133.7	66.8	33.4	16.7
	1	0	0	0	0	136.0	136.0	68.0	34.0	17.0
	0	1	0	1	0	137.3	137.3	68.6	34.3	17.1
	1	0	0	0	1	140.0	140.0	70.0	35.0	17.5
	1	0	0	1	0	142.6	142.6	71.3	35.6	17.8
	1	0	0	1	1	145.3	145.3	72.6	36.3	18.7
	1	1	0	0	0	146.6	146.6	73.3	36.6	18.3
	1	1	0	0	1	153.3	153.3	76.6	38.3	19.1
	1	1	0	1	0	160.0	160.0	80.0	40.0	20.0
	1	1	0	1	1	166.6	166.6	83.3	41.6	20.8
	1	1	1	1	1	200.0	200.0	100.0	50.0	25.0
D (133:100:66)	0	1	1	1	1	120.0	90.0	60.0	30.0	15.0
	0	1	1	0	0	133.3	100.0	66.6	33.3	16.6
	0	1	1	0	1	133.7	100.3	66.8	33.4	16.7
	0	1	1	1	0	137.3	103.0	68.6	34.3	17.1
	1	0	1	0	0	136.0	102.0	68.0	34.0	17.0
	1	0	1	0	1	140.0	105.0	70.0	35.0	17.5
	1	0	1	1	0	142.6	107.0	71.3	35.6	17.8
	1	0	1	1	1	145.3	109.0	72.6	36.3	18.1
	1	1	1	0	0	146.6	110.0	73.3	36.6	18.3
	1	1	1	0	1	160.0	120.0	80.0	40.0	20.0
	1	1	1	1	0	166.6	125.0	83.3	41.6	20.8

Motherboard Clock Generator for 815 with 133MHz FSB

GROUP OFFSET TIMING RELATIONSHIP

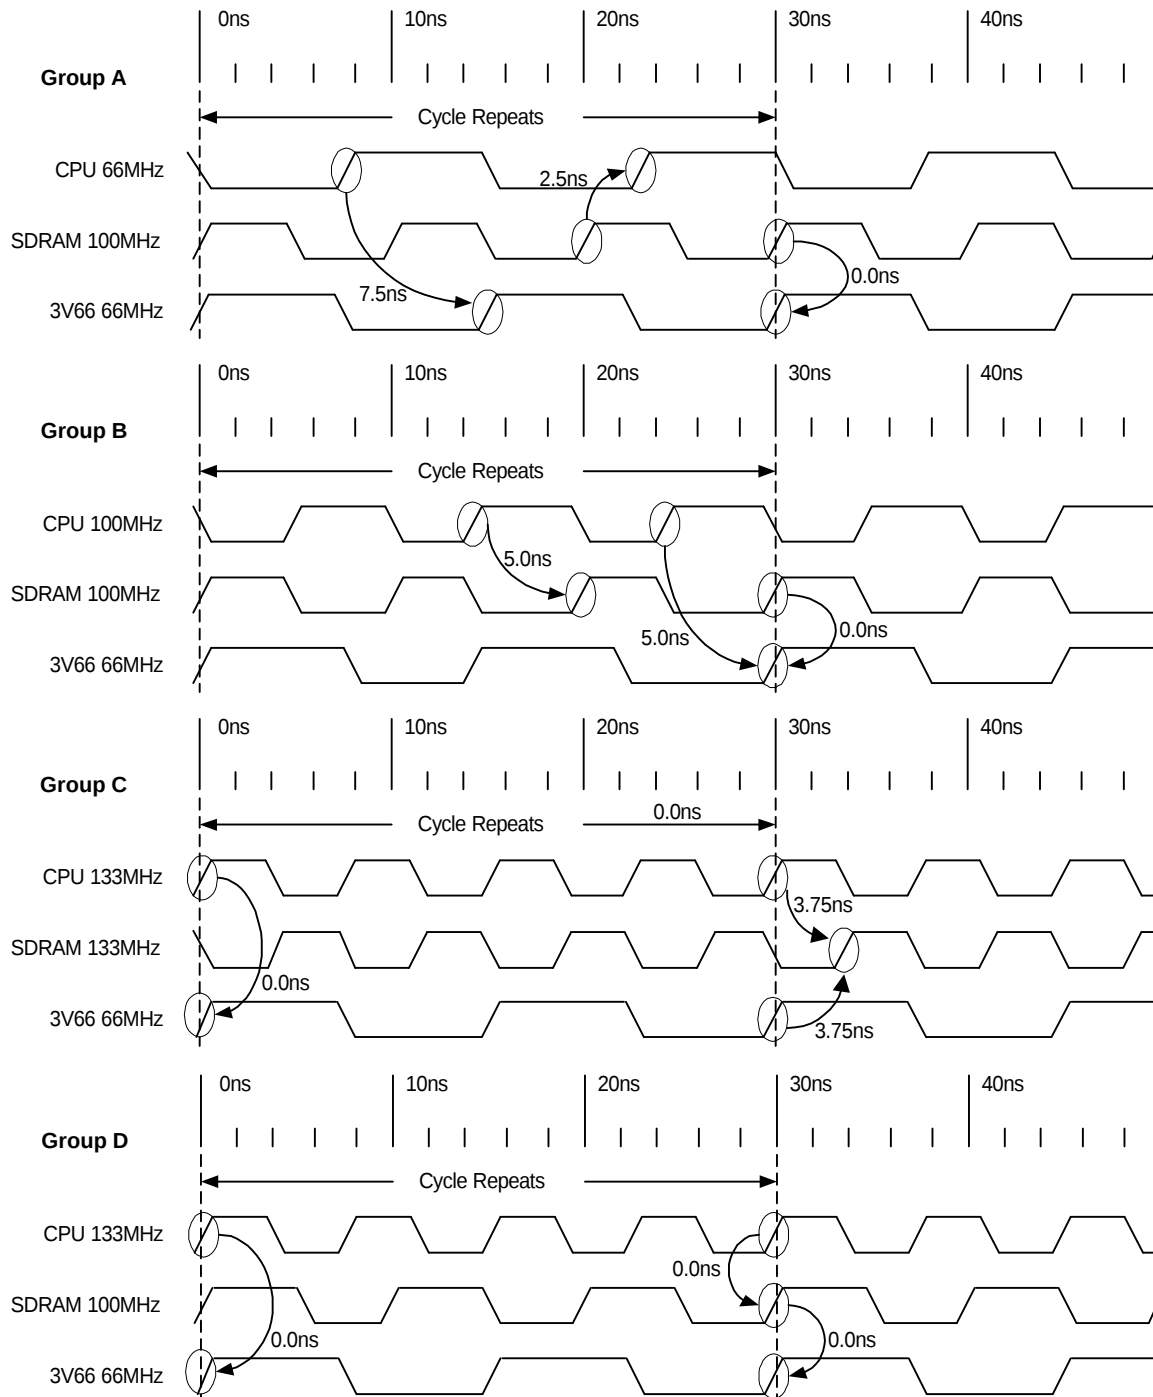

Motherboard Clock Generator for 815 with 133MHz FSB
I2C BUS CONFIGURATION SETTING

Address Assignment	A6 1	A5 1	A4 0	A3 1	A2 0	A1 0	A0 1	R/W —
Slave Receiver/Transmitter	Provides both slave write and readback functionality							
Data Transfer Rate	Standard mode at 100kbts/s							
Serial Bits Reading	The serial bits will be read or sent by the clock driver in the following order Byte 0 Bits 7, 6, 5, 4, 3, 2, 1, 0 Byte 1 Bits 7, 6, 5, 4, 3, 2, 1, 0 - Byte N Bits 7, 6, 5, 4, 3, 2, 1, 0							
Data Protocol	This serial protocol is designed to allow both blocks write and read from the controller. The bytes must be accessed in sequential order from lowest to highest byte. Each byte transferred must be followed by 1 acknowledge bit. A byte transferred without acknowledged bit will terminate the transfer. The write or read block both begins with the master sending a slave address and a write condition (0xD2) or a read condition (0xD3). Following the acknowledge of this address byte, in Write Mode: the Command Byte and Byte Count Byte must be sent by the master but ignored by the slave, in Read Mode: the Byte Count Byte will be read by the master then all other Data Byte . Byte Count Byte default at power-up is = (0x09).							

I2C CONTROL REGISTERS
1. BYTE 0: Functional and Frequency Select Clock Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	26	0	FS3 (see Frequency selection Table)
Bit 6	28	0	FS2 (see Frequency selection Table)
Bit 5	13	0	FS1 (see Frequency selection Table)
Bit 4	12	0	FS0 (see Frequency selection Table)
Bit 3	-	0	Frequency selection control bit 1=Via I2C, 0=Via External jumper
Bit 2	-	0	FS4 (see Frequency selection Table)
Bit 1	-	1	0 = Normal 1 = Spread Spectrum Enable
Bit 0	-	0	0 = Normal 1 = Tristate all outputs

Motherboard Clock Generator for 815 with 133MHz FSB

2. BYTE 1: SDRAM Clock Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	X	Inverted Power-on latched FS2 value (Read only)
Bit 6	-	X	Inverted Power-on latched FS1 value (Read only)
Bit 5	31	1	SDRAM_F (Active/Inactive)
Bit 4	32	1	SDRAM7 (Active/Inactive)
Bit 3	33	1	SDRAM6 (Active/Inactive)
Bit 2	35	1	SDRAM5 (Active/Inactive)
Bit 1	36	1	SDRAM4 (Active/Inactive)
Bit 0	37	1	SDRAM3 (Active/Inactive)

3. BYTE 2: PCI Clock Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	X	Inverted Power-on latched FS0 value (Read only)
Bit 6	20	1	PCI6 (Active/Inactive)
Bit 5	19	1	PCI5 (Active/Inactive)
Bit 4	17	1	PCI4 (Active/Inactive)
Bit 3	16	1	PCI3 (Active/Inactive)
Bit 2	15	1	PCI2 (Active/Inactive)
Bit 1	13	1	PCI1 (Active/Inactive)
Bit 0	12	1	PCI0 (Active/Inactive)

4. BYTE 3: 3V66 Clock Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	X	Inverted Power-on latched FS4 value (Read only)
Bit 6	-	1	Reserved
Bit 5	-	1	Reserved
Bit 4	-	X	Inverted Power-on latched FS3 value (Read only)
Bit 3	-	1	Reserved
Bit 2	7	1	3V66_0
Bit 1	8	1	3V66_1
Bit 0	9	1	3V66_2

Motherboard Clock Generator for 815 with 133MHz FSB

5. BYTE 4: Control Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	1	Reserved
Bit 6	-	1	Reserved
Bit 5	-	1	Reserved
Bit 4	-	1	Reserved
Bit 3	-	1	Reserved
Bit 2	26	1	48MHz_0
Bit 1	27	1	48MHz_1
Bit 0	28	1	24_48MHz

6. BYTE 5: Control Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	X	Inverted Power-on latched SEL24_48 value (Read only)
Bit 6	1	1	REF
Bit 5	47	1	IOAPIC
Bit 4	44	1	CPU1
Bit 3	45	1	CPU0
Bit 2	39	1	SDRAM2
Bit 1	40	1	SDRAM1
Bit 0	41	1	SDRAM0

7. BYTE 6: Fall-Back Frequency/ Revision/ Vendor ID Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description	
Bit 7	-	0	Revision ID Bit 3*	
Bit 6	-	0	Revision ID Bit 2*	
Bit 5	-	0	Revision ID Bit 1*	
Bit 4	-	0	WDT Fall-back Frequency selection for FS4	Revision ID Bit 0*
Bit 3	-	0	WDT Fall-back Frequency selection for FS3	Vendor ID Bit 3*
Bit 2	-	0	WDT Fall-back Frequency selection for FS2	Vendor ID Bit 2*
Bit 1	-	1	WDT Fall-back Frequency selection for FS1	Vendor ID Bit 1*
Bit 0	-	1	WDT Fall-back Frequency selection for FS0	Vendor ID Bit 0*

Note: *: Default value at power-up

Motherboard Clock Generator for 815 with 133MHz FSB

8. BYTE 7: Linear Programming (M) Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	0*	Linear programming sign bit (0 is + , 1 is -)
Bit 6	-	0*	Linear programming magnitude bit 6
Bit 5	-	0*	Linear programming magnitude bit 5
Bit 4	-	0*	Linear programming magnitude bit 4
Bit 3	-	0*	Linear programming magnitude bit 3
Bit 2	-	0*	Linear programming magnitude bit 2
Bit 1	-	0*	Linear programming magnitude bit 1
Bit 0	-	0*	Linear programming magnitude bit 0

Note: This register will be initialized to 0 following WATCHDOG RESET.

9. BYTE 8: WATCHDOG TIMER / Device ID Register (1=Enable, 0=Disable)

Bit	Pin#	Default	Description
Bit 7	-	0	Watchdog Timer Enable Bit. 1=Enable, 0=Disable
Bit 6	-	0	Device ID Bit 6*
Bit 5	-	0	Watchdog Time Interval Bit 5 (MSB) Device ID Bit 5*
Bit 4	-	0	Watchdog Time Interval Bit 4 Device ID Bit 4*
Bit 3	-	1	Watchdog Time Interval Bit 3 Device ID Bit 3*
Bit 2	-	0	Watchdog Time Interval Bit 2 Device ID Bit 2*
Bit 1	-	1	Watchdog Time Interval Bit 1 Device ID Bit 1*
Bit 0	-	1	Watchdog Time Interval Bit 0 (LSB) Device ID Bit 0*

Note: *: Default value at power-up

Motherboard Clock Generator for 815 with 133MHz FSB

PROGRAMMING OF CPU FREQUENCY

To simplify traditional loop counter setting, the PLL203-01 device incorporates SMART-BYTE technology with a single byte programming via I2C to better optimize clock jitter and spread spectrum performance. Detail of PLL203-01's dual mode frequency programming method is described below:

1. ROM-table Frequency Programming:

The pre-defined 32 frequencies found in Frequency table can be accessed either through 5 external jumpers or by setting internal I2C register in BYTE0.

2. Fine-step Linear Frequency Programming:

CPU Frequency can be programmed via I2C in fine and linear positive or negative stepping around current selected CPU frequency in Frequency table. The highest step is either +127 or -127. Other bus frequencies will be changed proportionally with the rate that CPU frequency change. The formula is as follow:

$$F_{CPU} = F_{CPU-ROM-table} \pm \alpha (=0.22 \text{ or } 0.15) * M$$

- Where:
1. M is magnitude factor defined in I2C Byte 7.bit(0:6)
 2. $\pm$ (sign bit) of M is defined in I2C Byte7.bit 7
 3. α is a constant but related to CPU's three Timing groups definition
 $\alpha = 0.22$ (for Group B,C) or $\alpha = 0.15$ (for Group A,D)

FREQUENCY PROGRAMMING EXAMPLE:

1. Procedures to program target CPU frequency to 123.0 Mhz in Group B timing:

- A. Locate the closest CPU frequency from Frequency from Frequency-ROM table: 120.0
- B. $\alpha = 0.22$ for Group B
- C. Solve M (Linear Magnitude factor) in integer:

$$\begin{aligned} M &= (F_{CPU} - F_{CPU-ROMTABLE}) / \alpha \\ &= (123 - 120) / 0.22 \\ &= 14 \end{aligned}$$

- D. Program I2C register:

7	6	5	4	3	2	1	0	
1	1	1	0	1	0	0	0	Setting of I2C.BYTE0

FS3 FS2 FS1 FS0 CTR FS4

7	6	5	4	3	2	1	0	
0	0	0	0	1	1	1	0	Setting of M = +14 in I2C.BYTE7
Sign	M6	M5	M4	M3	M2	M1	M0	

$$\begin{aligned} F_{CPU} &= 120.0 + (0.22) * 14 = 123.08 \quad (\% \text{ of frequency increased} = 2.6\%) \\ F_{SDRAM} &= 120.0 * (1 + 2.6\%) = 123.12 \\ F_{3V66} &= 80.0 * (1 + 2.6\%) = 82.08 \\ F_{PCI} &= 40.0 * (1 + 2.6\%) = 41.04 \end{aligned}$$

Motherboard Clock Generator for 815 with 133MHz FSB

BUILT-IN WATCHDOG TIMER (WDT)

Watchdog timer is used to perform safe recovery if frequency switching causes system to enter into Hang-up state within a reasonable period of time (or Watchdog time interval). The watchdog time interval can be programmed between 0 and 63 seconds with increment of 1 second by setting the value of I2C.Byte8.Bit(5:0). Once Enabled, WDT has to be disabled within a period that is shorter than the programmed watchdog interval; otherwise WDT will generate a 500ms low watchdog reset pulse to provoke a system reset. After system restarts, the PLL203-61 will start from predefined Fall-back Frequency (the value of I2C Byte6, bits(0:4)). If system for any reason fails again at Fall-back Frequency, the internal hardware will then generate a watchdog reset to restart the system from the value of external hardware jumper setting to ensure a safe recovery.

Example usage:

1. System power-up at CPU= 66.8MHz (Group A) where external jumpers are used.
- 2A. Switch to target CPU=100.3MHz frequency (Group B) with following I2C register setting:

7	6	5	4	3	2	1	0	
1	0	1	0	1	0	0	0	FSEL Setting in I2C.BYTE0
FS3	FS2	FS1	FS0	CTR	FS4			
7	6	5	4	3	2	1	0	
0	0	0	0	0	0	0	0	M =0 Setting in I2C.BYTE7
Sign	M6	M5	M4	M3	M2	M1	M0	
7	6	5	4	3	2	1	0	
1	0	0	0	1	1	1	1	WD-Timer = 15s Setting in I2C.BYTE8
ENB		T5	T4	T3	T2	T1	T0	
7	6	5	4	3	2	1	0	
0	0	0	0	1	0	1	0	FBSEL Setting in I2C.BYTE6
	FB4	FB3	FB2	FB1	FB0			


The fall-back frequency is set to the same location as that of FSEL since frequency switching between different timing groups will cause system to hang up. After WD timer expired or 15 seconds, the system will restart properly at target 100.3MHz if CPU is capable; otherwise WDT will perform another reset action to restart the system from 66.8 Mhz

- 2B. Switch to target CPU=78Mhz within the same timing Group

The fall-back frequency is recommended to set at the most safe and comfortable level to ensure a successful reboot such as 70 or 72.0 if system is unable to switch to 78Mhz.

Motherboard Clock Generator for 815 with 133MHz FSB

WDT OPERATIONAL FLOW CHART

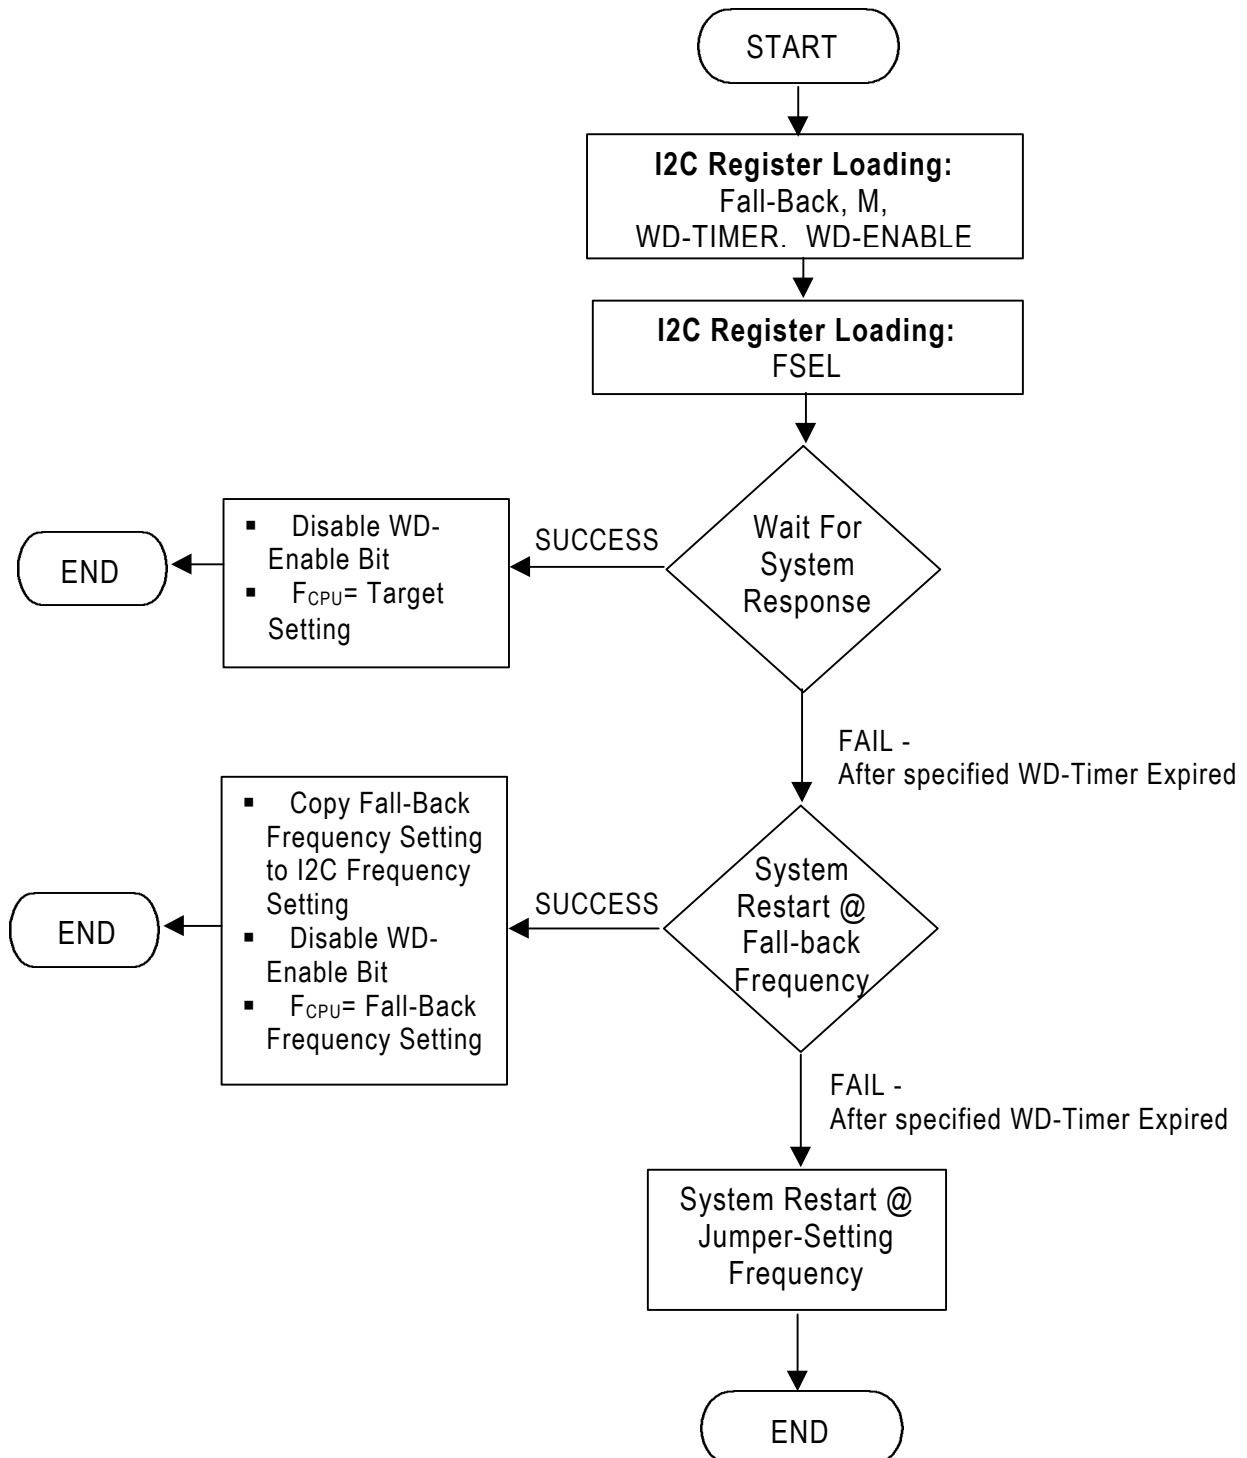

Motherboard Clock Generator for 815 with 133MHz FSB
ELECTRICAL SPECIFICATIONS
1. Absolute Maximum Ratings

PARAMETERS	SYMBOL	MIN.	MAX.	UNITS
Supply Voltage	V_{DD}	$V_{SS}-0.5$	5.5	V
Input Voltage, dc	V_I	$V_{SS}-0.5$	$V_{DD}+0.5$	V
Output Voltage, dc	V_O	$V_{SS}-0.5$	$V_{DD}+0.5$	V
Storage Temperature	T_S	-65	150	°C
Ambient Operating Temperature	T_A	0	70	°C
Junction Temperature	T_J		125	°C
ESD Voltage			2	KV

Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied.

2. AC/DC Electrical Specifications

PARAMETERS	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Operating Supply Current	$I_{DD3.3OP}$	$C_L = 0 \text{ pF @ } 66\text{MHz}$			100	mA
Input High Current	I_{IH}	$V_{IH} = V_{DD}$	-5		5	uA
Input Low Current	I_{IL1}	$V_{IN} = 0$; With no pull-up resistors	-5			uA
Input Low Current	I_{IL2}	$V_{IN} = 0$; With pull-up resistors	-200			uA
Input High Voltage	V_{IH}	All Inputs except XIN	2		$V_{DD}+0.3$	V
Input Low Voltage	V_{IL}	All inputs except XIN	$V_{SS}-0.3$		0.8	V
Input Frequency	F_{XIN}			14.318		Mhz
Input Capacitance	C_{IN}	Logic Inputs			5	PF
	C_{OUT}	Output pin Capacitance			6	
	C_{XIN}		27		45	
Power Down Supply Current	I_{PD}	$C_L=0 \text{ pF}$			600	uA
Pull up resistor	R_{PU}	Pin 1,12,26,27		120		Kohm
Pull down resistor	R_{PD}	Pin 13,28		120		Kohm

Motherboard Clock Generator for 815 with 133MHz FSB
2. Output Buffer Electrical Specifications

 Unless otherwise stated, all power supplies = 3.3V±5%, and ambient temperature range T_A= 0°C to 70°C

PARAMETERS	SYMBOL	OUTPUTS	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Rise time	T _{OR}	CPU,IOAPIC	Measured @ 0.4V ~ 2.0V, C _L =10-20pf, 2.5V±0.5%	0.4		1.6	ns
		REF,48MHZ, 24_48MHZ	Measured @ 0.4V ~ 2.4V, C _L =10-20pf		1.8	4	ns
		SDRAM	Measured @ 0.4V ~ 2.4V, C _L =10-30pf	0.4		1.6	ns
		PCI,3V66		0.5		2	
Output Fall time	T _{OF}	CPU,IOAPIC	Measured @ 2.0V ~ 0.4V, C _L =10-20pf, 2.5V±0.5%	0.4		1.6	ns
		REF,48MHZ, 24_48MHZ	Measured @ 2.4V ~ 0.4V, C _L =10-20pf		1.7	4	ns
		SDRAM	Measured @ 2.4V ~ 0.4V, C _L =10-30pf	0.4		1.6	ns
		PCI,3V66		0.5		2	
Duty Cycle	D _T	CPU,IOAPIC	Measured @ 1.25V C _L =20pf, V _{DD} =2.5V	45	50	55	%
		REF,48MHZ, SDRAM, PCI,3V66	Measured @ 1.5V, C _L =20~30pf, V _{DD} =3.3V				
Clock Skew (pin-pin)	T _{PSKEW}	CPU	2.5V, Measured @ 1.25V			250	ps
		IOAPIC				250	
		3V66	Measured @ 1.5V			175	
		SDRAM,48MHz				250	
		PCI				500	
Clock Skew	T _{SKEW}	CPU-SDRAM	CPU @ 66Mhz	2	2.5	3.0	ns
			CPU @ 100Mhz	4.5	5.0	5.5	
			CPU @ 133Mhz	-0.5	0	0.5	
		CPU-3V66	CPU @ 66Mhz	7	7.5	8	
			CPU @ 100Mhz	4.5	5.0	5.5	
			CPU @ 133Mhz	-0.5	0	0.5	
		SDRAM-3V66	CPU @ any frequency	-0.5	0	0.5	
		3V66-PCI		1.5	2.5	3.5	
		PCI-IOAPIC		-1	0	1	


Motherboard Clock Generator for 815 with 133MHz FSB
2. Output Buffer Electrical Specifications, continued

 Unless otherwise stated, all power supplies = 3.3V±5%, and ambient temperature range T_A= 0°C to 70°C

PARAMETERS	SYMBOL	OUTPUTS	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Impedance	Z _O	CPU	V _{DD} =2.5V±0.5%	13.5		45	ohm
		IOAPIC		9		30	
		REF,48MHZ	V _{DD} =3.3V±0.5%	20		60	
		SDRAM		10		24	
		PCI,3V66		12		55	
Output High Current	I _{OH}	CPU	V _{OUT} = 1.0V ~ 2.375V	-27		27	mA
		IOAPIC	V _{OUT} = 1.0V ~ 2.375V	-27		-27	
		REF,48MHZ	V _{OUT} = 1.0V ~ 3.135V	-29		-23	
		SDRAM	V _{OUT} = 2.0V ~ 3.135V	-54		-46	
		PCI,3V66	V _{OUT} = 1.0V ~ 3.135V	-33		-33	
Output Low Current	I _{OL}	CPU	V _{OUT} = 1.2V ~ 0.3V	27		30	mA
		IOAPIC	V _{OUT} = 1.2V ~ 0.3V	27		30	
		REF,48MHZ	V _{OUT} = 1.95V ~ 0.4V	29		27	
		SDRAM	V _{OUT} = 1.0V ~ 0.4V	54		53	
		PCI,3V66	V _{OUT} = 1.95V ~ 0.4V	30		38	
Jitter (cycle to cycle)	J _{cyc-cyc}	CPU	Measured @ 1.25V			250	ps
		IOAPIC				500	
		SDRAM	Measured @ 1.5V			250	
		PCI,3V66				500	
		REF,48MHZ				1000	

Motherboard Clock Generator for 815 with 133MHz FSB

PACKAGE INFORMATION

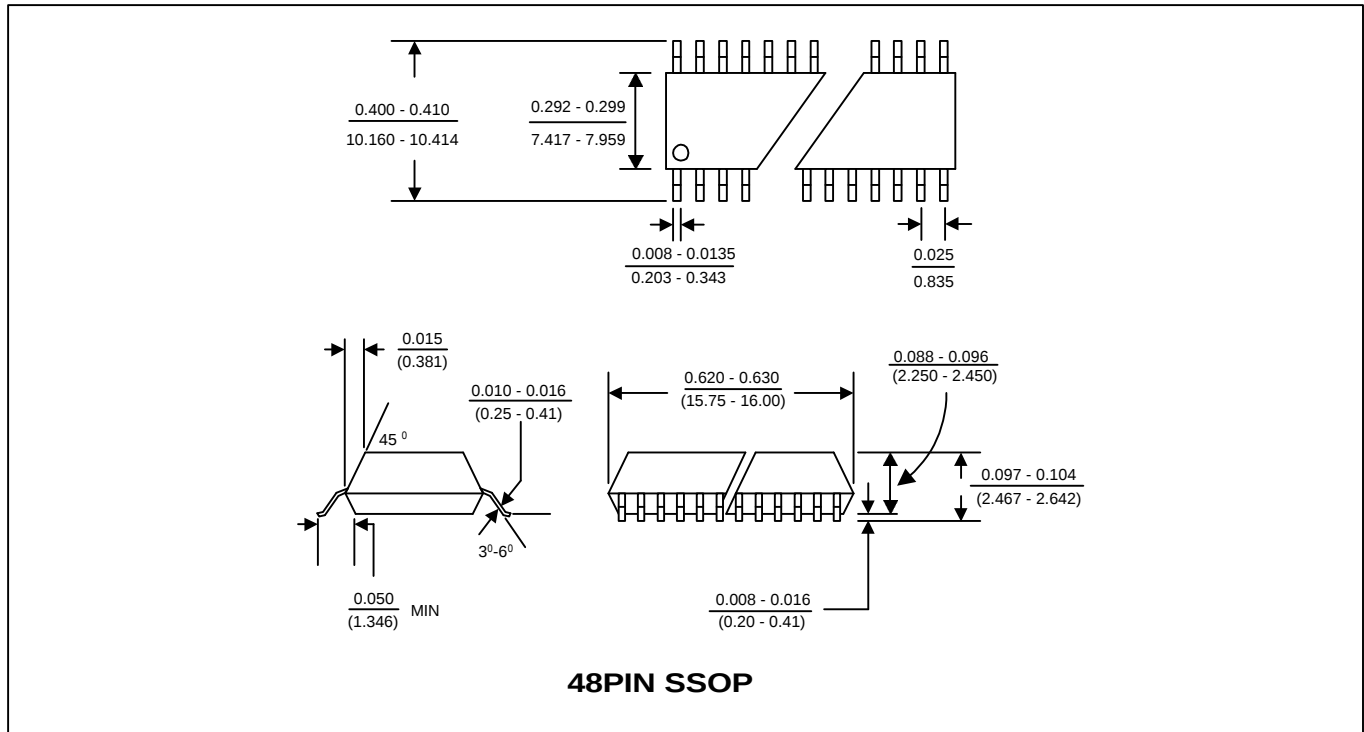

ORDERING INFORMATION

For part ordering, please contact our Sales Department:

45437 Warm Springs Blvd., Fremont, CA 94539, USA

Tel: (510) 492-0990 Fax: (510) 492-0991

PART NUMBER

The order number for this device is a combination of the following:
Device number, Package type and Operating temperature range

PLL203-11 X C

PART NUMBER

TEMPERATURATURE
C=COMMERCIAL
M=MILITARY
I=INDUSTRIAL
PACKAGE TYPE
X=SSOP

PhaseLink Corporation, reserves the right to make changes in its products or specifications, or both at any time without notice. The information furnished by PhaseLink is believed to be accurate and reliable. However, PhaseLink makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon this product.

LIFE SUPPORT POLICY: PhaseLink's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of PhaseLink Corporation.