


Photointerrupter

P6291

Photo IC output

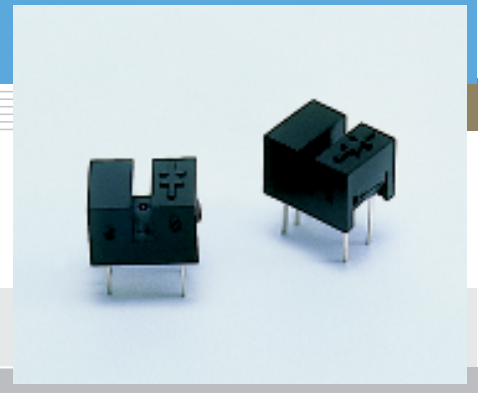

P6291 is a photointerrupter consisting of a high-power infrared LED and a photo IC. The photo IC incorporates a high-sensitivity photodiode, an amplifier, a Schmitt trigger circuit and an output transistor, all integrated in a single chip. These elements are enclosed in a miniature C-shape plastic package with a gap of 1.2 mm and a slit width of 0.2 mm, allowing object detection with high precision.

Features

- Photo IC output
- Miniature package

Applications

- Timing detection for copier, printer, etc.
- Rotary encoder
- Tape end detection for VTR, tape recorder, etc.

■ Absolute maximum ratings (Ta=25 °C)


	Parameter	Symbol	Value	Unit
Input	Forward current	IF	50	mA
	Reverse voltage	VR	5	V
	Power dissipation	P	80	mW
Output	Supply voltage	Vcc	-0.5 to +7	V
	Output voltage	Vo	-0.5 to +7	V
	Output current	Io	8	mA
	Power dissipation	Po	80	mW
	Operating temperature	Topr	-25 to +85	°C
	Storage temperature	Tstg	-30 to +85	°C
	Soldering	-	260 °C, 3 s, at least 1 mm away from package surface	-

■ Electrical and optical characteristics (Ta=25 °C, Vcc=5 V, unless otherwise noted)

	Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward voltage	VF	IF=20 mA	-	1.25	1.45	V
	Reverse current	IR	VR=5 V	-	-	10	μA
	Terminal capacitance	Ct	VR=0 V, f=1 MHz	-	30	-	pF
Output	Supply voltage	Vcc		2.2	-	7	V
	Low level output voltage	VOL	IOL=4 mA, IF=0 mA	-	0.1	0.4	V
	High level output current	IOH	Vo=5 V, IF=10 mA	-	-	10	μA
	Current consumption	ICC		-	1.3	3.0	mA
Transfer characteristics	L→H threshold input current	IFLH	RL=1.2 kΩ	-	0.6	6	mA
	Hysteresis	-	IFHL/IFLH	-	0.8	-	-
	L→H propagation delay time	tPLH	IF=10 mA RL=1.2 kΩ	-	-	20	μs
	H→L propagation delay time	tPHL		-	-	30	μs
	Rise time	tr		-	0.07	-	μs
	Fall time	tf		-	0.03	-	μs


Note) Connect a capacitor of 0.01 μF or more between Vcc and GND.

LED forward current vs. ambient temperature

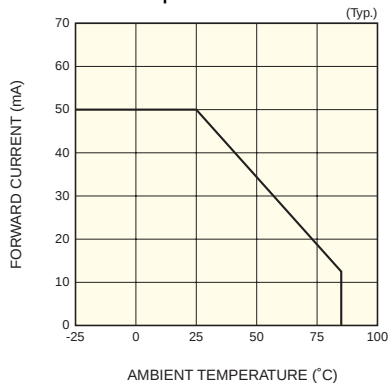


KLEB0081EA

Allowable power dissipation vs. ambient temperature

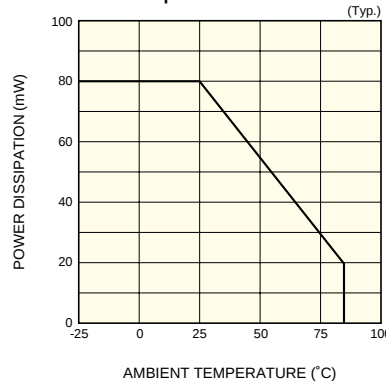


KPCB0001EA

Position detection characteristic (1)

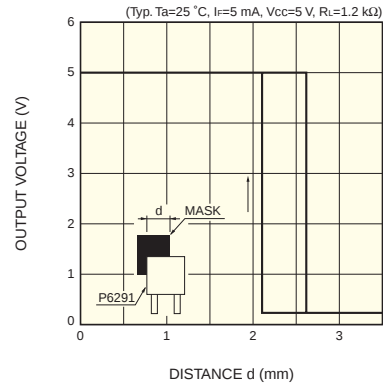


KPCB0004EA

Position detection characteristic (2)

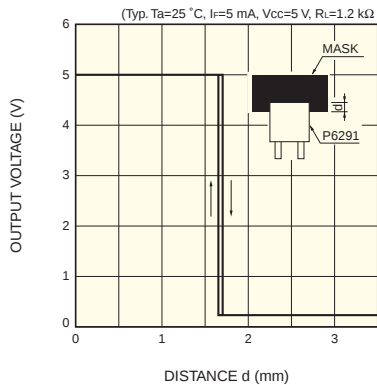


KPCB0005EA

Threshold current vs. ambient temperature

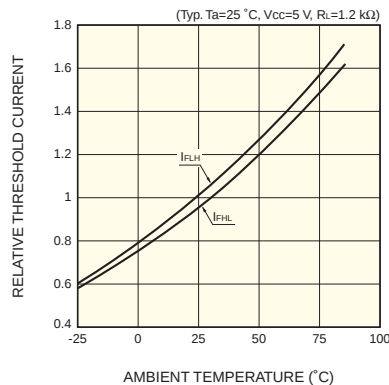


KPCB0006EA

Dimensional outline (unit: mm)

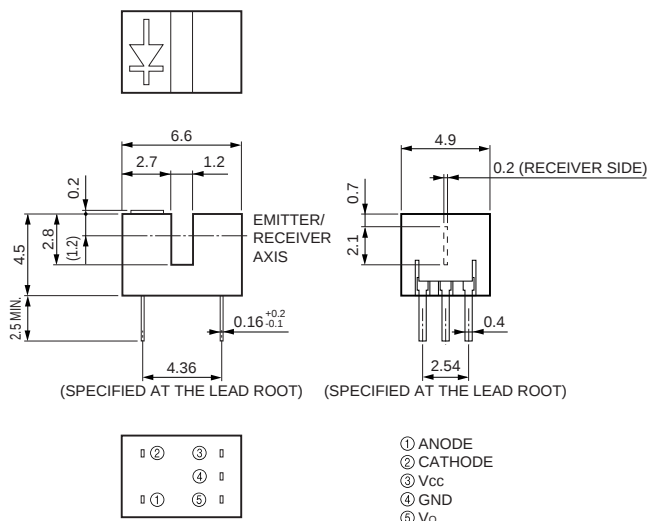

Response time measuring circuit

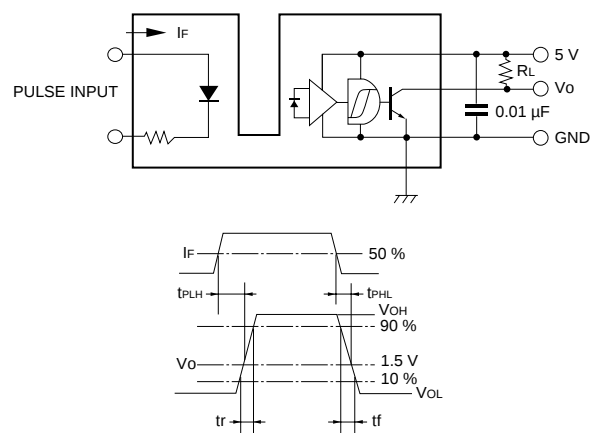

KPCA0007EA

Tolerance unless otherwise noted: ± 0.2
Values in parentheses are not guaranteed,
but for reference.

KPCA0006EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.

Cat. No. KPC1007E01
Jun. 2001 DN