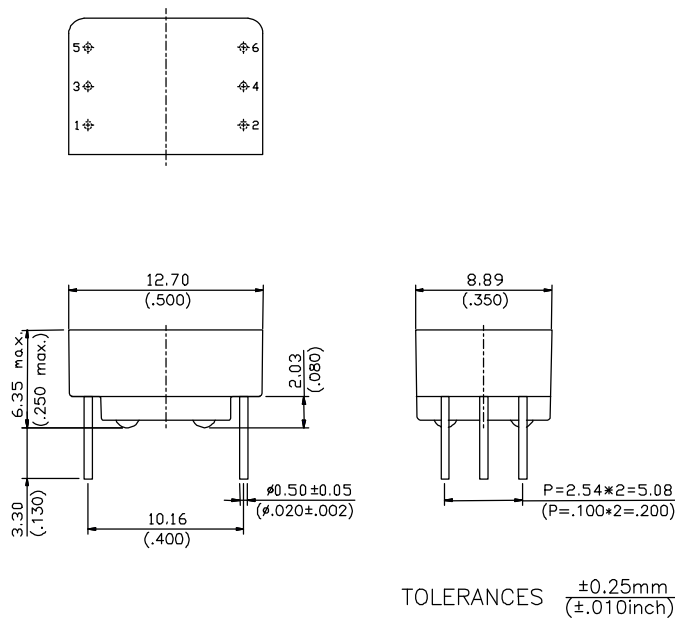


Feature

- ◆ Used in local area networks, RF circuits.
data coupling and coax isolation for IBM 3270
interface applications.
- ◆ Digital and data processing application.
- ◆ Isolated 500Vdc.
- ◆ High isolated 2KVdc version available.

Specifications

Parameter	Condition		Min.	Typ.	Max	Unit
Turn Ratio	Pin(1-5):(2-6)			2CT: 1CT±2%		
Inductance	@10KHz,100mV	Pin(1-5)	2			mH
Cww	@10KHz,100mV	Pin(1-5) to (2-6)			20	pF
Leakage Inductance	@100KHz,100mV	Pin(1-5) tie (2+6)			1.8	μH
DCR	@10KHz,100mV	Pin(1-5)			2.5	Ω
Voltage Isolation	1 second	Pin(1+3+5) to (2+4+6)	600			Vrms

Dimension

Schematic
