
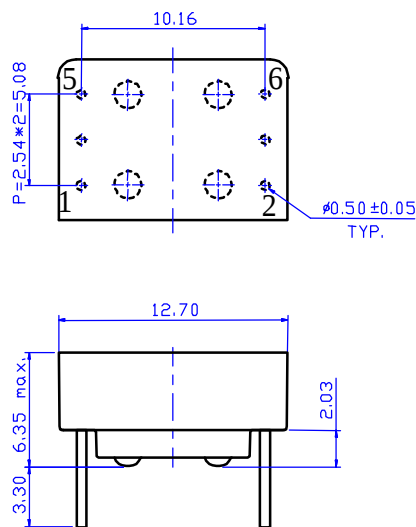


Feature

- ◆ Designed for T1/CEPT/ISDN-PRI interface. ◆ 1500Vrms isolation.

Specifications

Parameter	Condition		Min.	Typ.	Max.	Unit
Turn Ratio	Pin(1-5) : (2-6)			1 :1.36CT±5%		
Inductance	Pin(1-5)	10KHz , 100mV @25°C	0.70			mH
Leakage inductance	Pin(1-5)	10KHz , 100mV			0.70	μH
C _{ww}	Pin(1-5) to (2-6)	100KHz , 100mV			20	PF
DC Resistance	Pin(1-5)				0.50	ohms
	Pin(2-6)				0.40	ohms
Voltage Isolation	Pin(1-5) to (2-6)	1 minute	1500			Vrms

Dimension**Schematic**