

Feature






◆ Idc: 60mA

◆ Operating temperature range: 0°C to +70°C

Specifications @ 25°C

Parameter	Condition		Min.	Typ.	Max.	Unit
Turn Ratio	Pin(5-8) : (2-11) : (7-6)			0.8 : 1 : 0.8		±2%
	@10KHz,100mV with 60mADC	Pin(8-6) tie(5+7)		14.5±10%		mH
Leakage inductance	@100KHz,100 mV	Pin(8-6) tie(5+7,2+11)			90	μH
DCR		Pin(8-6) tie(5+7)		2.7		Ω
		Pin(2-11)		2.8		Ω
C _{ww}	@10KHz,100mV	Pin(2-11) to (8-5-7-6)			100	pF
Voltage Isolation	2 second	Line to Device	2000			V _{rms}
DC Current			60			mA

Dimension

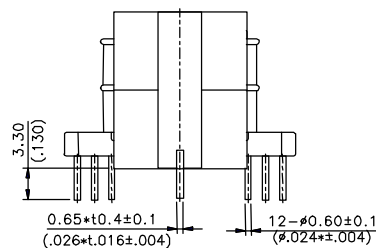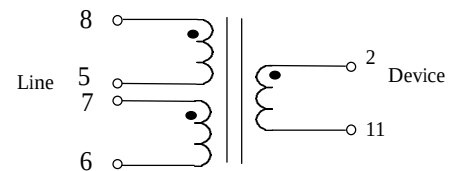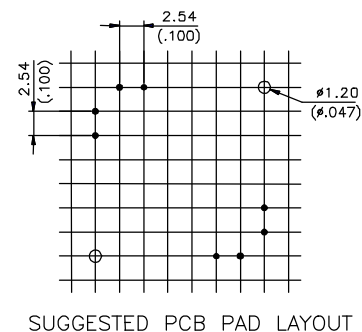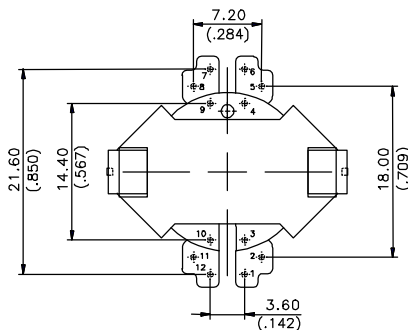

Unless otherwise specified , all tolerances are mm(inch) ± 0.25(0.01)