

Feature






- ◆ Designed for use with Alcatel's Dynamite ADSL chipset.
- ◆ For Central Office and Customer Premise Applications.

Specifications@25°C

Parameters	Condition		Min.	Typ	Max.	Unit
Turns ratio	Pin (4-6) : (1-3)			1:1±2%		
Inductance	@100KHz , 100mV	Pin (1-3)		91.0±10%		μH
DCR		Pin(4-6)			0.85	Ω
		Pin(1-3)			0.85	Ω
Hi-pot	1 sec	Pin(1-3) to Pin(4-6)	500			Vrms
Operating temperature			-40		85	°C

Dimension

Schematic

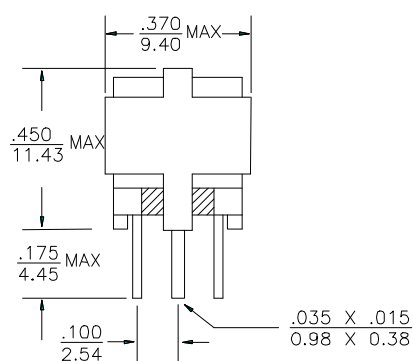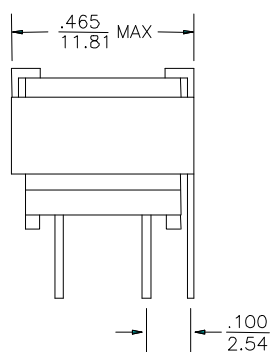

Unless otherwise specified , all tolerances are mm(inch) ± 0.25(0.01)