
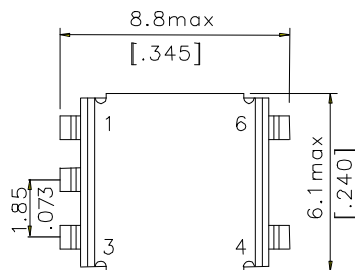



Feature :

- Matched to Globespan G7000(DMT/CAP) chipset.
- ♦ Used exclusively for frequency filtering.
- ♦ Operating temperature range: 0 to +70°C
- ♦ Excellent THD performance in a small footprint.
- ♦ Voltage Isolation :500Vrms.

Specifications: @ 25°C

Parameters	Condition		Min.	Typ	Max.	Unit
Turns ratio	Pin (1-6):Pin(2-5)			1:1 ±2%		
Inductance	@100KHz, 0.1Vrms	Pin (1-6)		340±7%		uH
DCR	@10KHz,1Vrms	Pin(1-6) , Pin(2-5)			7.5	Ω
THD	@75KHz,1.5Vrms			-60		dB
Isolation	1second	Pri. To sec.	500			Vrms

Dimension**Schematic**

Unless otherwise specified , all tolerances are mm(inch) ± 0.25(0.01)