

Feature




- ◆ Designed for use with Alcatel's Dynamite ADSL chipset.
- ◆ For Central Office Applications.

Specifications@25°C

Parameters	Condition		Min.	Typ	Max.	Unit
Turns ratio	Pin (2-6) / (3-7)			1.125		±2%
	Pin (3-7) / (4-8)			2		±2%
	Pin (1-6) / (3-7)			1.125		±2%
Inductance	@100KHz , 100mV	Pin (3-7)	844			μH
DCR		Pin(1-6)/(2-1)			0.20	Ω
		Pin(3-7)			0.19	Ω
		Pin(4-8)			0.11	Ω
Hi-pot	1 sec	Pin(2-6) to Pin(8-3)	500			Vrms
Operating temperature			-40		85	°C

Dimension

Schematic

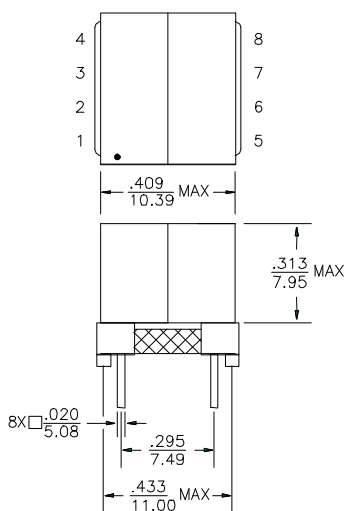

Unless otherwise specified , all tolerances are mm(inch) ± 0.25(0.01)