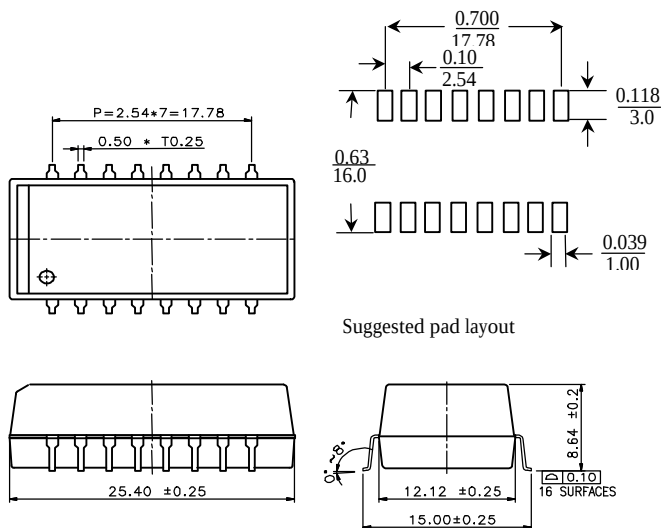


Feature

- ◆ Supports speeds up to 25.92 Mbps
- ◆ Surface mount package .
- ◆ Designed for Broadcom BCM 6010 Chip .
- ◆ Isolation Voltage : 2000Vrms

Specifications

Parameter	Condition	Min.	Typ.	Max.	Unit
Turn Ratio	Pin(1-5):(16-15)		2CS : 1		
	Pin(12-8):(11-9)		1CS : 1CT		
DCR.	Pin(16-15)			0.5	Ω
Return Loss	1MHz ~ 30MHz	20			dB
	300KHz ~ 1MHz	13.5			dB
Insertion Loss	300KHz ~ 30MHz			0.5	dB
Longitudinal Balance	300KHz	60			dB
	300KHz ~ 1MHz	50			dB
	1MHz ~ 10MHz	45			dB
	10MHz ~ 30MHz	30			dB
Transhybrid Loss	1MHz ~ 30MHz	29			dB
Isolation Voltage	Pin(1-2)-Pin(17-19)	2000			Vrms

Dimension**Schematic**