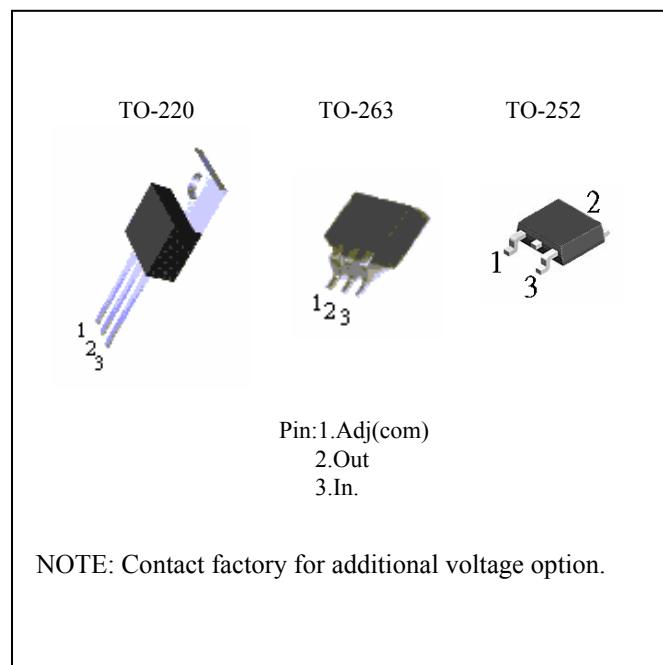
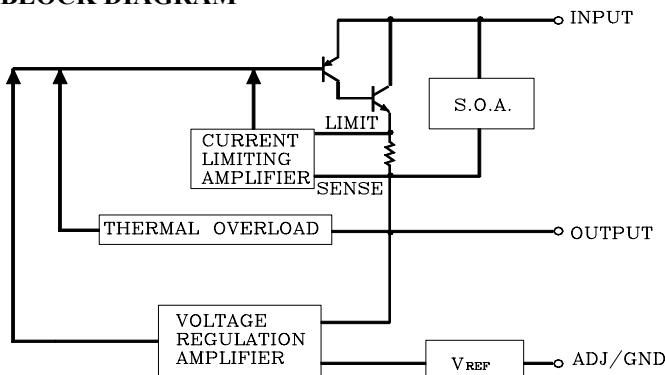


## 1.5 Amp Low Dropout Positive Voltage Regulators

The PJ1086 series of high performance positive voltage regulators designed for use in applications requiring low dropout performance at full rated current. Additionally, the PJ1086 Series provides excellent regulation over variations due to changes in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The PJ1086 Series are three terminal regulators with fixed and adjustable voltage options available in popular packages.

**FEATURES**

- Low dropout voltage 1.3V max.
- Full current rating over line and temperature
- Fast transient response
- $\pm 2\%$  Total output regulation over line, load and temperature
- Adjust pin current max  $120 \mu A$  over temperature
- Line regulation typical 0.015%.
- Load regulation typical 0.05%.
- Fixed/adjustable output voltage
- TO-220 & TO-263 ,TO-252 package

**BLOCK DIAGRAM**

NOTE: Contact factory for additional voltage option.

**ORDERING INFORMATION**

Device	Operating Temperature (Ambient)	Package
PJ1086CZ	-20°C ~ +85°C	TO-220
PJ1086CZ-2.5		TO-263
PJ1086CZ-3.3		TO-252
PJ1086CM		
PJ1086CM-2.5		
PJ1086CM-3.3		
PJ1086CP		
PJ1086CP-2.5		
PJ1086CP-3.3		

**ABSOLUTE MAXIMUM RATING**

Parameter	Symbol	Maximum	Units
Input Voltage	V <sub>IN</sub>	7	V
Power Dissipation	P <sub>D</sub>	Internally Limited	W
Thermal Resistance Junction to Case	θ <sub>JC</sub>	2.5	°C/W
Thermal Resistance Junction to Ambient		50	
Operating Junction Temperature Range	T <sub>J</sub>	0 to +125	°C
Operating Ambient Temperature Range	T <sub>A</sub>	-20 to +85	
Storage Temperature Range	T <sub>STG</sub>	-25 to 150	
Lead Temperature(Soldering) 10 Sec.	T <sub>LEAD</sub>	260	

## 1.5 Amp Low Dropout Positive Voltage Regulators

**ELECTRICAL CHARACTERISTICS**

Unless otherwise specified, Adjust VIN=2.75V to 12V and Adjust Io=10mA to 1.5A

Fixed VIN=4.75V to 12V and Fixed Io=10mA to 1.5A


Parameter	Symbol	Test Conditions			Test Limits			Units	
		V <sub>IN</sub> -V <sub>OUT</sub>	I <sub>O</sub>	T <sub>J</sub> <sup>(4)</sup>	Min	Typ	Max		
Output Voltage <sup>(1)</sup> Fixed Voltage	V <sub>O</sub>	5V	10mA	25	0.99 Vo	V <sub>O</sub>	1.01 Vo	V	
				Over Temp.	0.98 Vo		1.02 Vo		
Reference Voltage <sup>(1)</sup> Adj Voltage	V <sub>REF</sub>	5V	10mA	25	1.238	1.250	1.262	%	
				Over Temp.	1.225		1.275		
Line Regulation <sup>(1)</sup> (Vin-Vout=3V)	REG <sub>(LINE)</sub>		10mA	25		0.015	0.2	%	
				Over Temp.		0.035			
Load Regulation <sup>(1)</sup> (Vin-Vout=3V)	REG <sub>(LOAD)</sub>			25		0.05	0.3		
				Over Temp.		0.2	0.4		
Dropout Voltage $\Delta V_{REF} = 1\%$	V <sub>D</sub>			25		1		V	
				Over Temp.		1.1	1.3		
Current Limit (Vin-Vout=5V)	I <sub>C<sub>L</sub></sub>					1.6	2.5	A	
Quiescent Current Fixed Model	I <sub>Q</sub>	5V				12	14	mA	
Temperature Coefficient	T <sub>c</sub>					0.005		%/ <sup>o</sup> C	
Adjust Pin Current	I <sub>ADJ</sub>					55		$\mu$ A	
							120		
Adjust Pin Current Change	$\Delta I_{ADJ}$					0.2	5		
Temperature Stability	T <sub>s</sub>	5V	500mA			0.5		%	
Minimum Load Current Adjust Model	I <sub>O</sub>	5V				5	10	mA	
RMS Output Noise <sup>(2)</sup>	V <sub>N</sub>					0.003		%V <sub>O</sub>	
Ripple Rejection Ratio <sup>(3)</sup>	R <sub>A</sub>	5V	1.5A	Over Temp.	60	72		dB	

(1)Low duty cycle pulse testing with Kelvin connections required.


(2)Bandwidth of 10Hz to 10KHz.

(3)120Hz input ripple (C<sub>ADJ</sub> for ADJ)=25  $\mu$  F .

(4)Over Temp.-over specified operating junction temperature range.

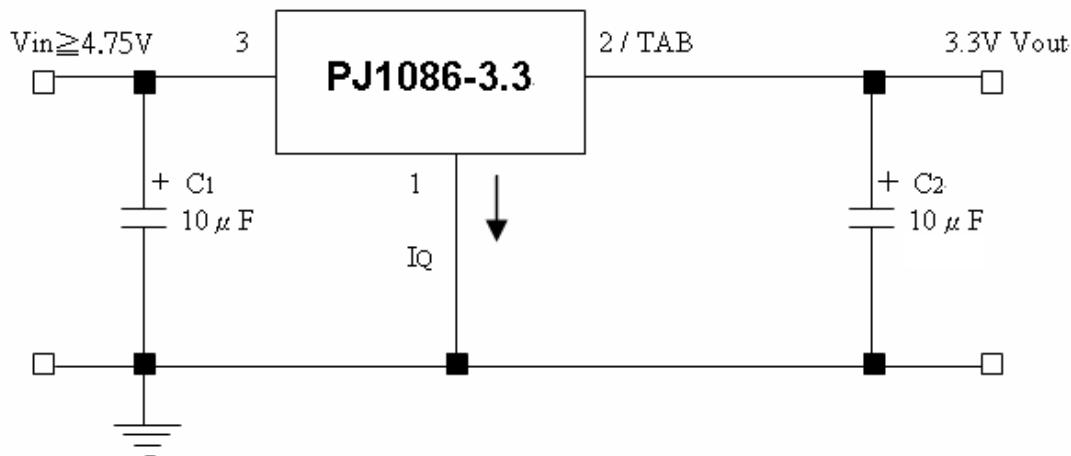
**1.5 Amp Low Dropout Positive Voltage Regulators****Typical Application Circuit****FIXED VOLTAGE REGULATOR (1)(2)**

- (1)  $C_1$  NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS  
 (2)  $C_2$  REQUIRED FOR STABILITY

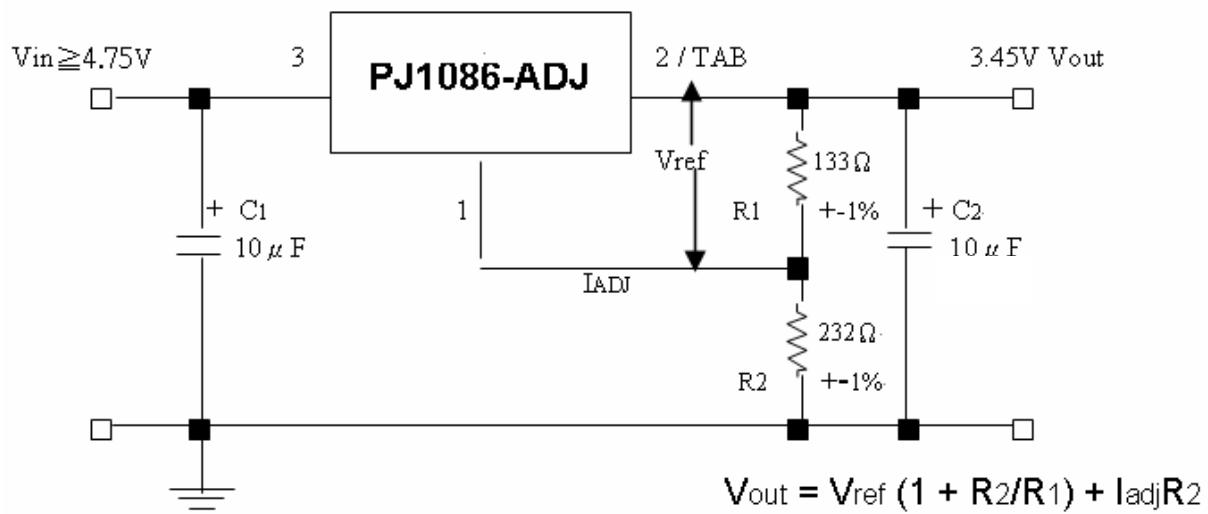
**ADJUSTABLE VOLTAGE REGULATOR (1)(2)**

- (1)  $C_1$  NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS  
 (2)  $C_2$  REQUIRED FOR STABILITY


# 1.5 Amp Low Dropout Positive Voltage Regulators

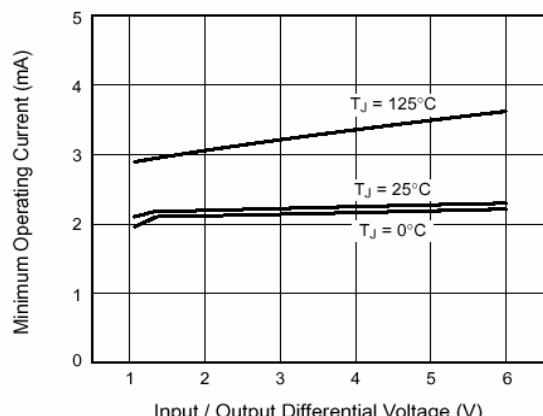


**Fig. 1 – Minimum Load Current (Adjustable Version)**

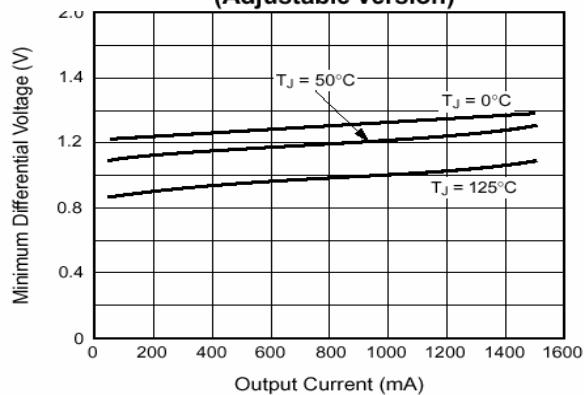


**Fig. 3 – Dropout Voltage ( $V_{OUT} = 3.3\text{V}$ )**

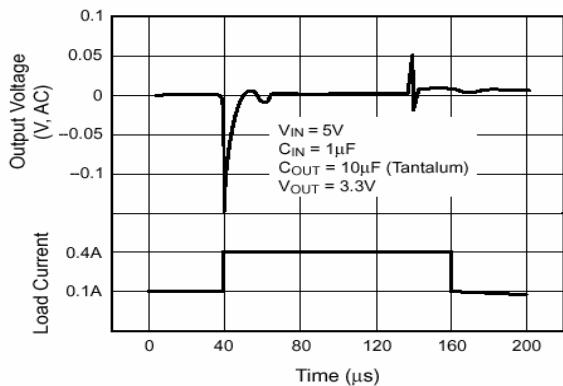


**Fig. 5 – Load Transient Response**

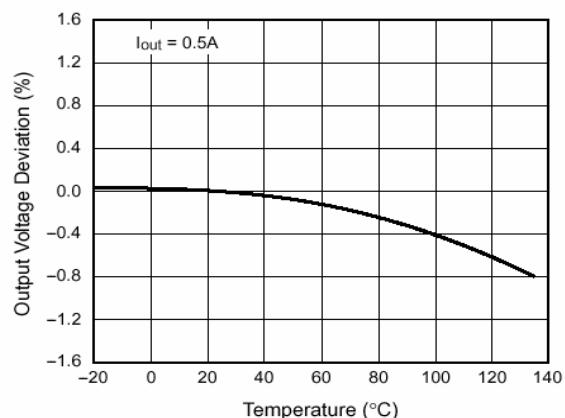


**Fig. 7 – Temperature Stability**

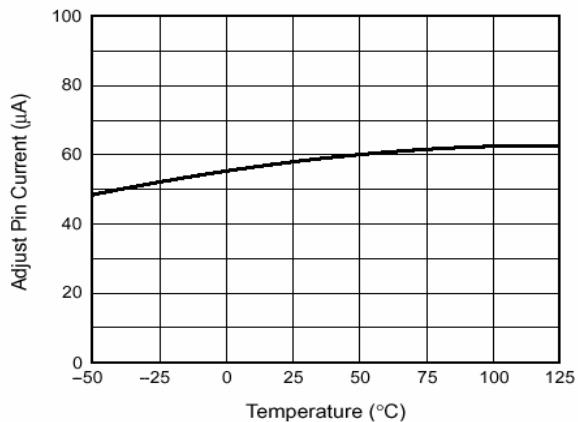


**Fig. 2 – Adjust Pin Current**

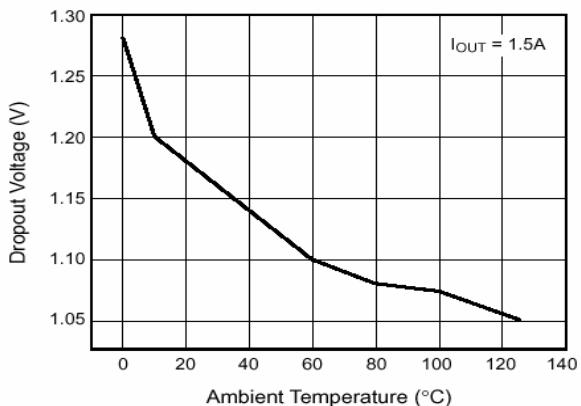



**Fig. 4 – Dropout Voltage v.s. Temperature**

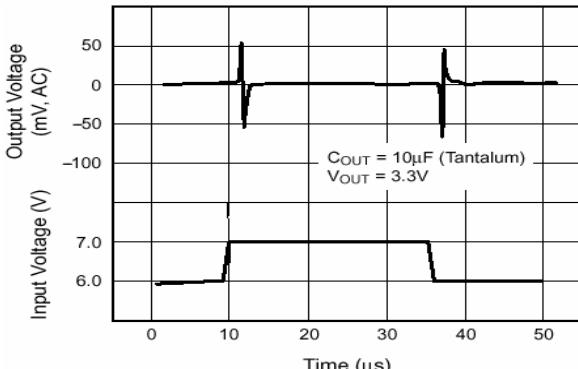



**Fig. 6 – Line Transient Response**

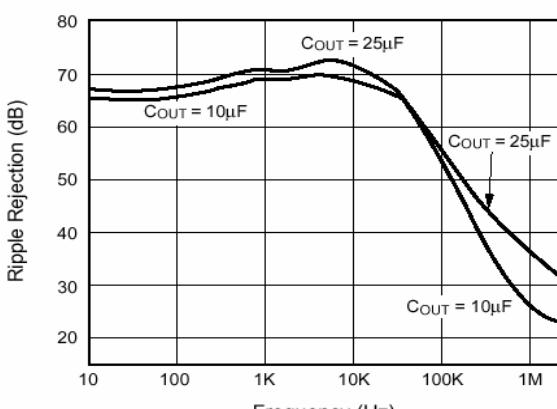

**Fig. 8 – Ripple Rejection (with  $C_{adj} 25\mu\text{F}$ )**

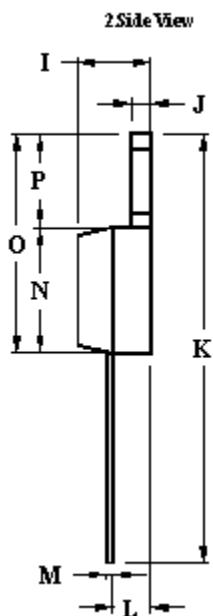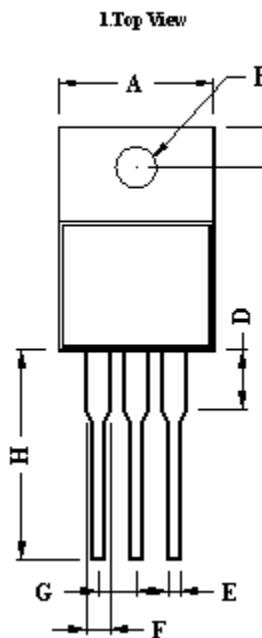**1.5 Amp Low Dropout Positive Voltage Regulators****TO-220 Mechanical drawing****TO-220 Unit:mm**

<b>TO-220 DIMENSION</b>				
DIM	<b>MILLIMETERS</b>		<b>INCHES</b>	
	MIN	MAX	MIN	MAX
A	10.00	10.50	0.394	0.413
B	3.24	4.44	0.128	0.175
C	2.44	2.94	0.096	0.116
D	3.565	4.315	0.140	0.170
E	0.68	0.92	0.027	0.036
F	1.115	1.485	0.044	0.058
G	2.345	2.715	0.092	0.107
H	13.49	14.31	0.531	0.563
I	4.475	5.225	0.176	0.206
J	1.15	1.39	0.045	0.055
K	27.78	29.62	1.094	1.166
L	2.175	2.925	0.086	0.115
M	0.297	0.477	0.012	0.019
N	8.28	8.80	0.326	0.346
O	14.29	15.31	0.563	0.603
P	6.01	6.51	0.237	0.256

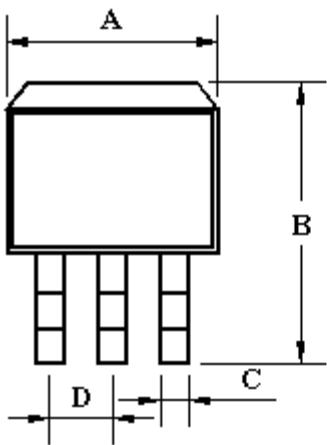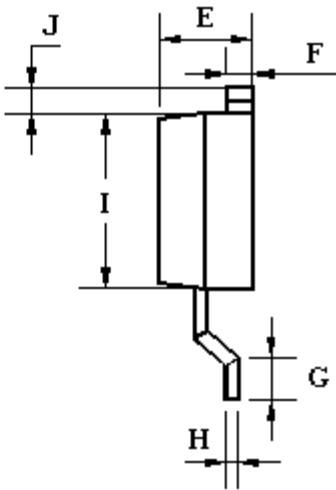
**TO-263 Mechanical drawing****TO-263 Unit:mm****1.Top View****2.Side View**

<b>TO-263 DIMENSION</b>				
DIM	<b>MILLIMETER S</b>		<b>INCHES</b>	
	MIN	MAX	MIN	MAX
A	10.00	10.50	0.394	0.413
B	14.60	15.87	0.575	0.625
C	0.68	0.92	0.027	0.036
D	2.42	2.66	0.095	0.105
E	4.31	4.83	0.170	0.190
F	1.14	1.40	0.045	0.055
G	2.28	2.79	0.090	0.110
H	0.45	0.73	0.018	0.029
I	8.28	8.80	0.326	0.346
J	1.14	1.4	0.045	0.055


**1.5 Amp Low Dropout Positive Voltage Regulators****TO-252 Mechanical drawing**

TO-252 Unit:mm

1.Top View

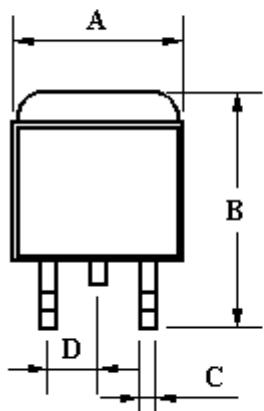

2.Side View

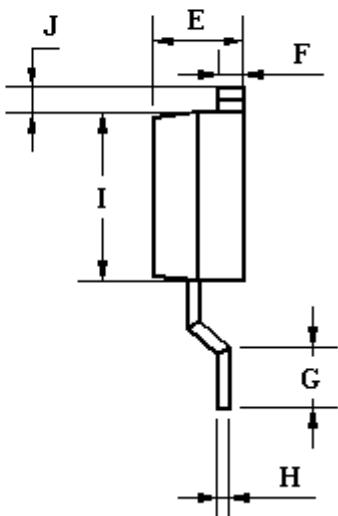

TO-252 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.57	6.84	0.259	0.269
B	9.25	10.40	0.364	0.409
C	0.62	0.76	0.024	0.030
D	2.56	2.67	0.101	0.105
E	2.30	2.39	0.090	0.094
F	0.49	0.57	0.019	0.022
G	1.46	1.58	0.057	0.062
H	0.52	0.57	0.020	0.022
I	5.34	5.55	0.210	0.219
J	1.46	1.64	0.057	0.065