

STEERING DIODE ARRAYS

APPLICATIONS

- High Frequency Data Lines
- RS-232 & RS-422 Interface Networks
- 10 Base T Networks
- LAN/ WAN
- Computer I/O Ports


FEATURES

- IEC 1000-4-2, -4 & -5 Industry Requirements
- Designed for Bus Voltage Protection
- ESD Protection > 40 kilovolts
- Low Capacitance - 5 pF
- Working Voltage > 50 Volts
- UL 94V-0 Flammability Classification
- Available in Standard SO-14 Surface Mount Package

DESCRIPTION


This series is designed with discrete diodes for complete isolation. Each diode can be individually tested according to the electrical characteristics. For transient voltage protection, two diodes are configured in series with the anode of one connected to the cathode of the other diode (See Circuit Diagram).

IEC 1000-4 COMPATIBLE



SO-14 PACKAGE


CIRCUIT DIAGRAM

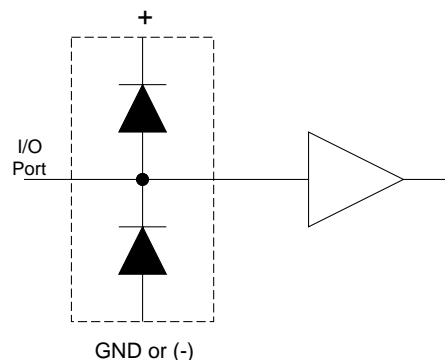

SEE DIAGRAMS ON FOLLOWING PAGE.

MAXIMUM RATINGS @ 25°C Ambient Temperature (unless specified)	
Continuous Power Dissipation	500mW
Operating & Storage Temperature	-55° to +150°C
Continuous Forward Current	400mA
MECHANICAL CHARACTERISTICS	
Package	Molded SO-14 Surface Mount Package
Packaging	Tube or 16mm Tape per EIA 481
Approximate Weight	0.15 grams
Device Markings	Logo & Part Number
Miscellaneous	Pin No. 1 Indicated by Dot on Top of Package

**FIGURE 1
PULSE WAVE FORM**

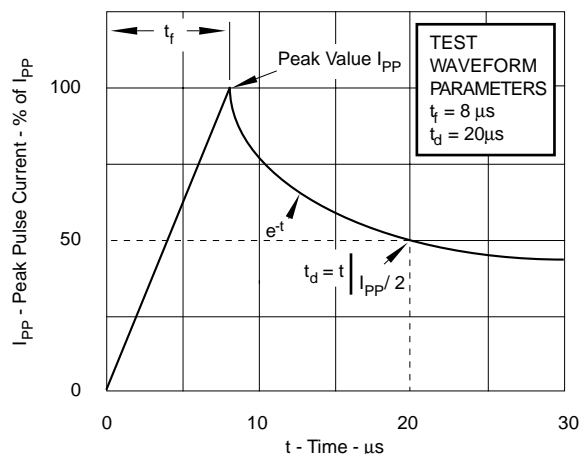


ELECTRICAL CHARACTERISTICS @ 25° C Ambient Temperature					
PROTEK PART NUMBER	REPETITIVE PEAK REVERSE VOLTAGE @ 10 μ A V_{RRM} VOLTS	REVERSE LEAKAGE CURRENT @ 40 V I_{RM} μ A	MAXIMUM FORWARD VOLTAGE @ 100 mA V_F VOLTS	FORWARD PEAK PULSE CURRENT (See Fig. 1) @ 8/20 μ s I_{FM} AMPS	MAXIMUM CAPACITANCE @ 4 V, 1 MHz C pF
See Note 1	50	0.1	1.2	40	5

Note 1: Device Types Include: PMMAD130, PMMAD1103, PMMAD1105, PMMAD1106, PMMAD1107 and PMMAD1109. Electrical characteristics applies to all device types.


CIRCUIT DIAGRAM

PMMAD130

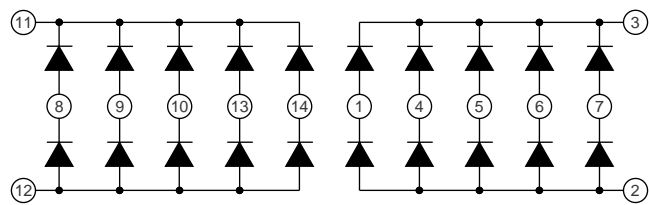


DUAL 10 DIODE ARRAY

PMMAD1106

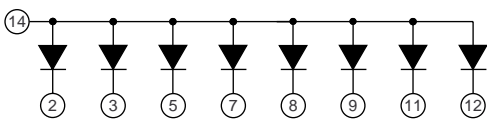


8 DIODE COMMON ANODE ARRAY
NC Pin 1, 4, 6, 10 & 13

PMMAD1103

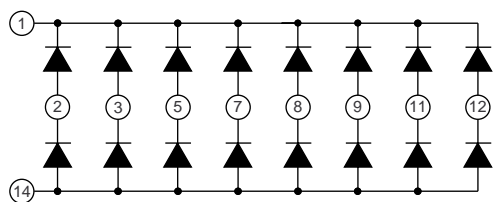


14 DIODE ARRAY
NC Pins 4, 6, 10 & 13

PMMAD1107

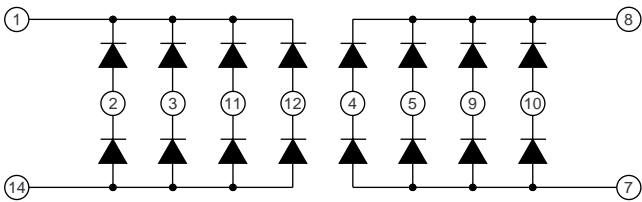


DUAL 8 DIODE ARRAY
NC Pins 6 & 13

PMMAD1105

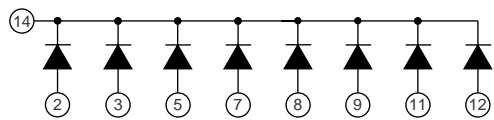

8 DIODE COMMON CATHODE ARRAY
NC Pins 1, 4, 6, 10 & 13


PMMAD1109

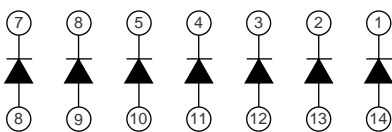

7 ISOLATED DIODE ARRAY
(Independent)




SO-14 PACKAGE OUTLINE

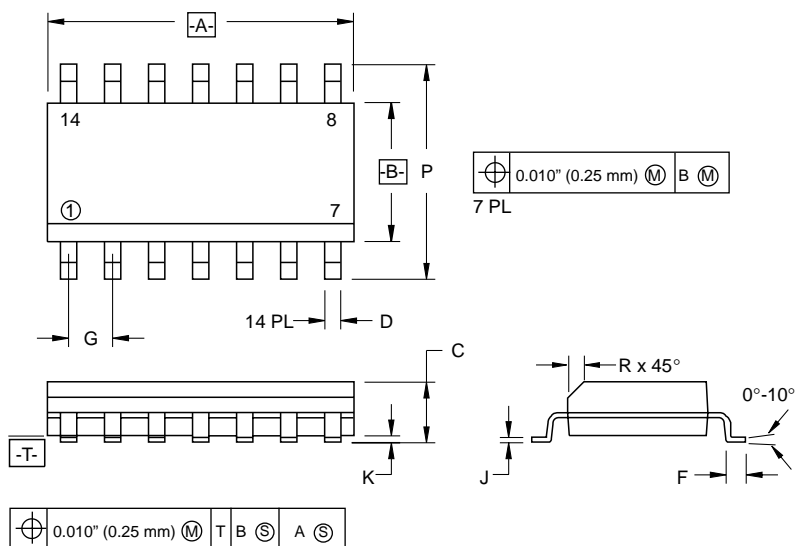

SO-14 PACKAGE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.55	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BCS	1.27 BSC	0.05 BSC	0.05 BSC
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

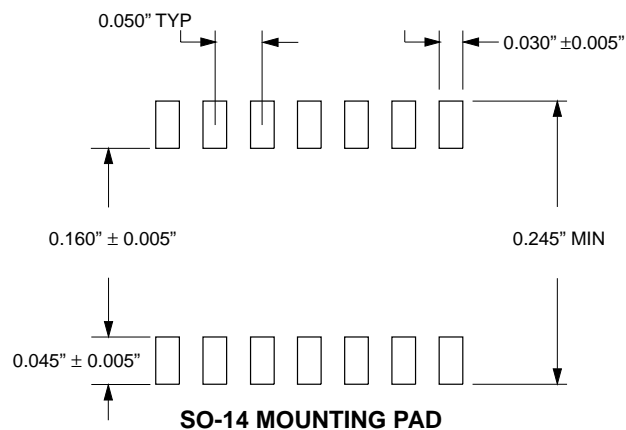

COPYRIGHT © ProTek Devices 1999

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.