**PRINCIPAL SPECIFICATIONS**

Model Number	Freq. Range, MHz	Freq. Perform., MHz	Isolation, dB,		Insertion Loss, dB,		Phase Balance,		Amplitude Balance, dB,		VSWR In/Out		Input Power* Max.
			Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	
PDM-20-10	0.05 - 20	0.05 - 20	30	33	0.5	0.3	1°	0.5°	0.2	0.1	1.3:1	1.2:1	2 W
PDM-20-50	1 - 100	1 - 100	30	35	0.5	0.3	1°	0.5°	0.2	0.1	1.3:1	1.2:1	3 W
PDM-20-250	10 - 500	10 - 400	30	32	0.5	0.4	2°	1°	0.2	0.1	1.3:1	1.2:1	3 W
		10 - 500	30	32	0.6	0.5	2°	1°	0.2	0.1	1.3:1	1.2:1	3 W
PDM-20-500	5 - 1000	5 - 1000	25	30	1.0	0.7	2°	1°	0.2	0.1	1.3:1	1.2:1	1 W
PDM-20-1100	200 - 2000	500 - 1500	23	27	1.0	0.3	4°	2°	0.3	0.1	1.4:1	1.2:1	2 W
		200 - 2000	15	20	1.5	0.8	6°	3°	0.3	0.1	2.0:1	1.5:1	2 W

*CW input power when used as divider with 1.2:1 VSWR_{Out}.**General Notes:**

1. The PDM-20 series of connectorized two way In-Phase Power Dividers/Combiners covers 50 kHz to 2 GHz using lumped element design providing very broad bandwidths.

GENERAL SPECIFICATIONS

Impedance: 50 Ω nom.

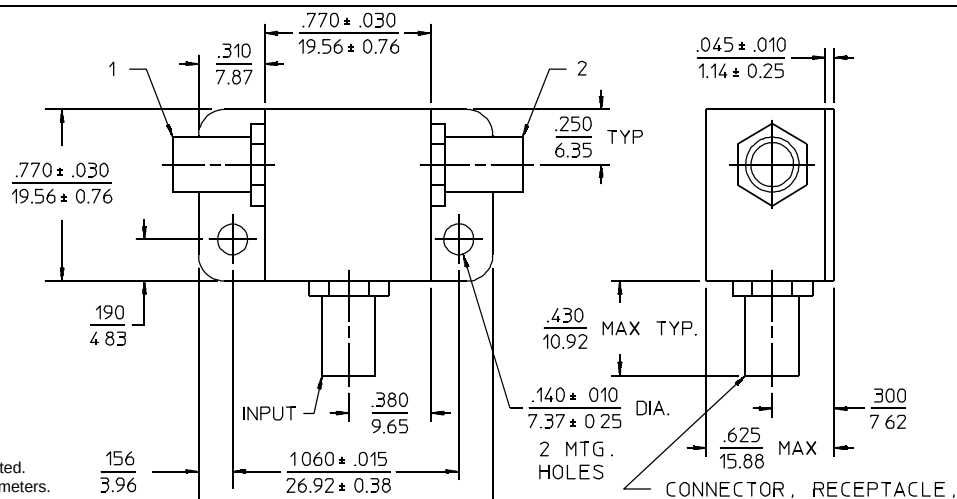
Internal Load Dissipation:

PDM-20-1100: 125 mW max.

All Others: 250 mW max.

Weight, nominal: 1 oz. (28 g)

Operating Temperature: -55° to +85°C

Package Outline

NOTES:

1. Tolerance on 3 place decimals $\pm .020$ (.51) except as noted.
2. Dimensions in inches over millimeters.

19Feb96