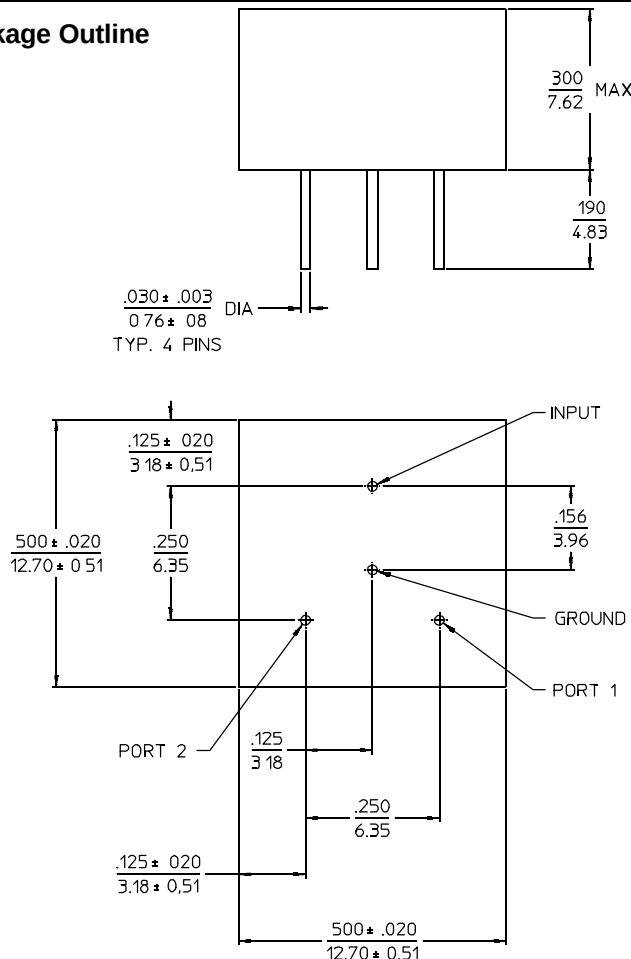
**PRINCIPAL SPECIFICATIONS**

Model Number	Frequency Range, MHz	Freq., Perform., MHz	Isolation, dB,		Insertion Loss, dB,		Phase Balance,		Amplitude Bal., dB,		VSWR, (In/Output)		Internal Load Dissip.
			Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	
PDS-20-600	50 - 1000	50 - 150	15	25	1.0	0.7	2°	1°	0.3	0.1	1.8:1	1.5:1	125 mW
		150 - 1000	25	30	1.0	0.7	2°	1°	0.3	0.1	1.4:1	1.2:1	

Package Outline

NOTES: 1. Tolerance on 3 place decimals $\pm .010(.25)$ except as noted.
 2. Dimensions in inches over millimeters.

GENERAL SPECIFICATIONS

Coupling:	- 3 dB nom.
Impedance:	50 Ω nom.
CW Input Power:	1 Watt max.
	(When used as a divider with 1.2:1 VSWR _{out})
Package Type:	Square Header
Weight:	0.32 oz. (9 g)
Operating Temperature:	- 55° to +85°C

General Notes:

1. The PDS-20-600 2-way Power Divider/Combiner covers 50 to 1,000 MHz using a special lumped element design to reduce the size making it suitable for applications requiring high performance in a small package.
2. For maximum reliability in a PC package, Merrimac recommends the use of a Meri-Pac™ equivalent PDP-2N series which is hermetically sealed with a welding process.

22Feb96