

Wireless Power Transistor, 33W 1805 - 1880 MHz

PH1819-33


V2.01

Features

- NPN Silicon Microwave Power Transistor
- Common Emitter Class AB Operation
- Internal Input and Output Impedance Matching
- Diffused Emitter Ballasting
- Gold Metallization System

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CE0}	25	V
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current	I_C	4.7	A
Power Dissipation	P_D	91	W
Storage Temperature	T_{STG}	-55 to +150	°C
Junction Temperature	T_J	200	°C
Thermal Resistance	θ_{JC}	3.0	°C/W

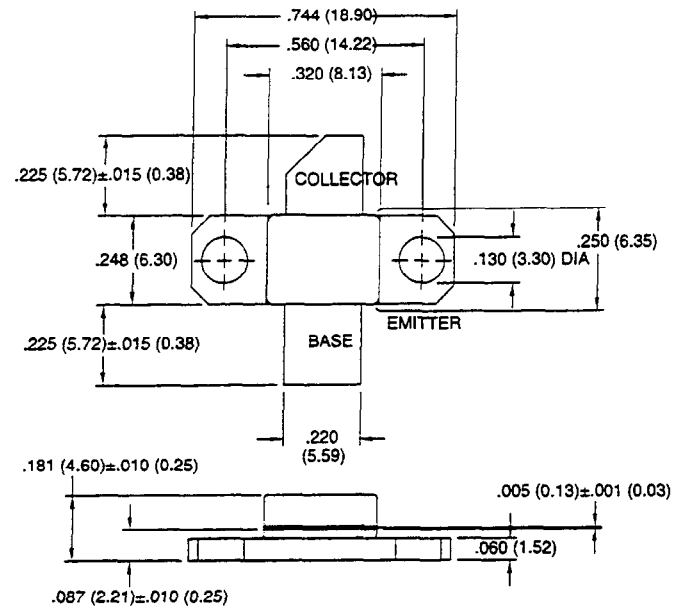


UNLESS OTHERWISE NOTED, TOLERANCES ARE
INCHES $\pm .005$ " (MILLIMETERS ± 0.13 MM)

Electrical Characteristics at 25°C


Parameter	Symbol	Min	Max	Units	Test Conditions
Power Gain	G_p	7.0	-	dB	$V_{CC}=25$ V, $I_{CC}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Collector Efficiency	η_c	40	-	%	$V_{CC}=25$ V, $I_{CC}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Input Return Loss	RL	10	-	dB	$V_{CC}=25$ V, $I_{CC}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC}=25$ V, $I_{CC}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz

Broadband Test Fixture Impedances

F(GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
1805	$1.8 - j5.5$	$4.0 - j1.4$
1850	$1.6 - j5.1$	$3.9 - j1.4$
1880	$1.7 - j4.8$	$4.0 - j0.9$

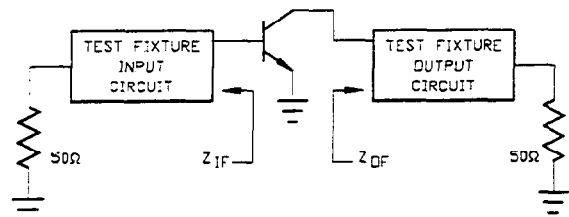

RF Test Fixture

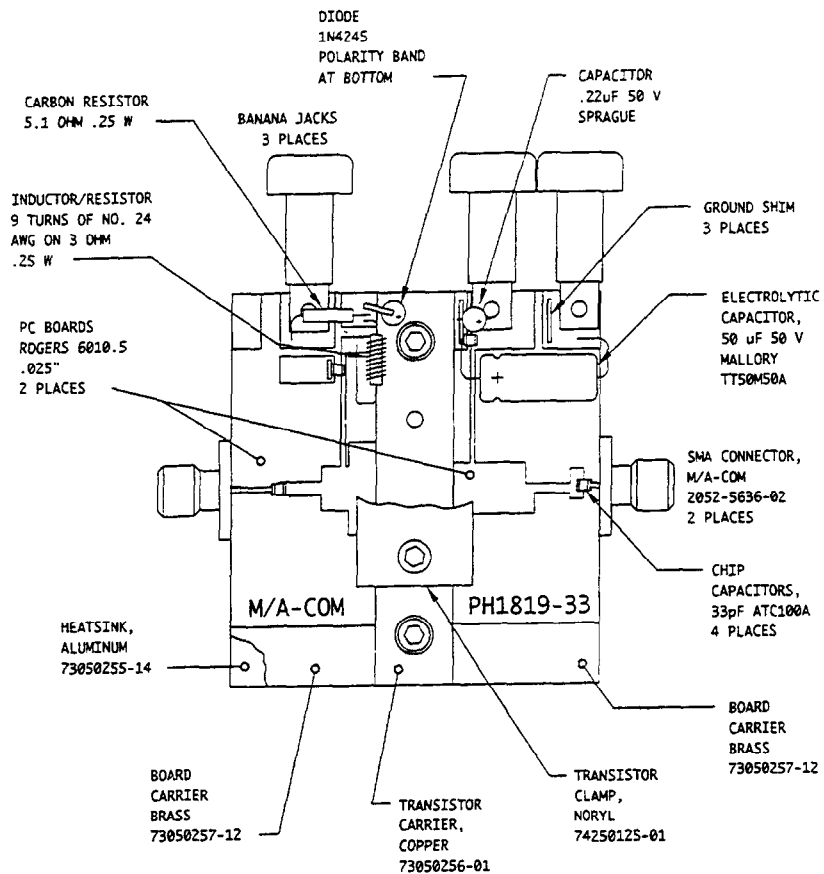

Test Fixture PC Board Dimensions

