

Radar Pulsed Power Transistor, 4W, 100μs Pulse, 10% Duty 1.2 - 1.4 GHz

PH1214-4M


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EB0}	3.0	V
Collector Current (Peak)	I_C	875	mA
Total Power Dissipation	P_{TOT}	17	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to +200	°C

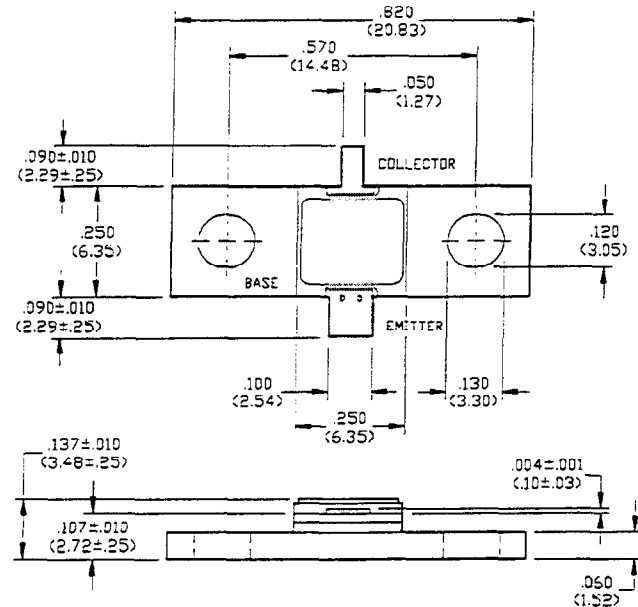


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES ±.005" (MILLIMETERS ±.13MM)

Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	65	-	V	$I_C=8$ mA
Collector-Emitter Leakage Current	I_{CES}	-	1.0	mA	$V_{CE}=40$ V
Thermal Resistance	$R_{TH(JC)}$	-	8.6	°C/W	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Output Power	P_{OUT}	4.0	-	W	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Power Gain	G_P	7.0	-	dB	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Collector Efficiency	η_C	45	-	%	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Input Return Loss	RL	6	-	dB	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Load Mismatch Tolerance	VSWR-T	-	3:1	-	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz
Load Mismatch Stability	VSWR-S	-	1.5:1	-	$V_{CC}=28$ V, $P_{IN}=800$ mW, $F=1.20, 1.30, 1.40$ GHz



Broadband Test Fixture Impedances

F(GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
1.20	$7.0 - j4.5$	$12.0 + j24$
1.30	$6.4 - j3.0$	$12.5 + j21$
1.40	$6.0 - j1.5$	$10.5 + j24$

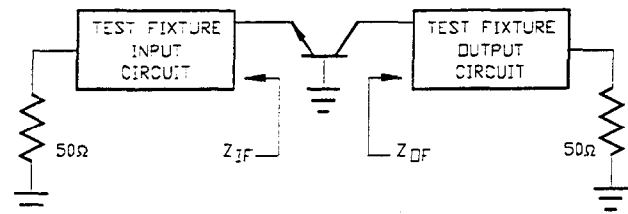

Specifications Subject to Change Without Notice.

RF Test Fixture

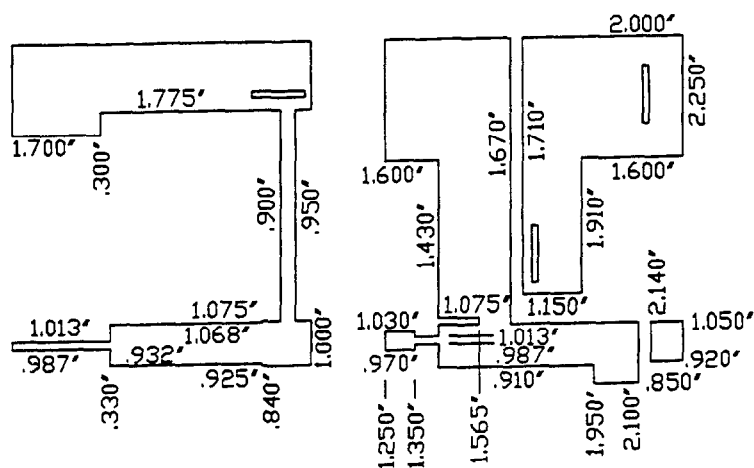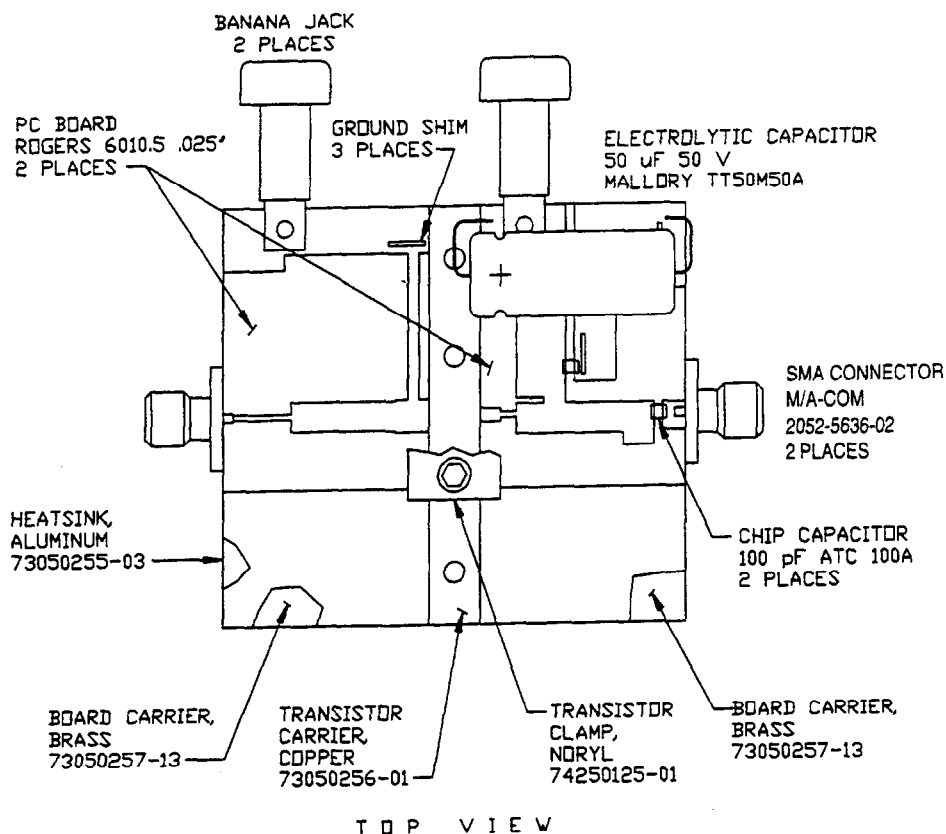

C I R C U I T D I M E N S I O N S

M/A-COM, Inc.

Specifications Subject to Change Without Notice.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

9-119