

Radar Pulsed Power Transistor, 25W, 2μs Pulse, 10% Duty

3.1 - 3.5 GHz

PH3135-25S


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	3.0	A
Total Power Dissipation	P_{TOT}	195	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to +200	°C

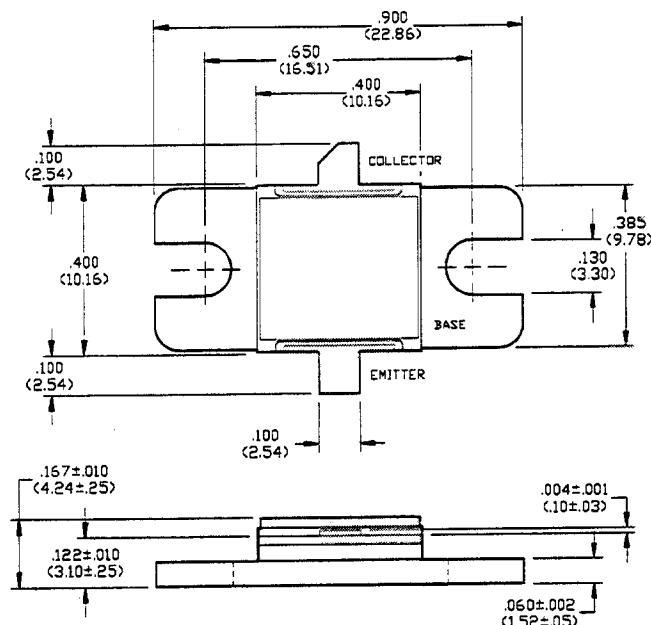


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES ±.005* (MILLIMETERS ±.13MM)

Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	65	-	V	$I_C=10\text{ mA}$
Collector-Emitter Leakage Current	I_{CES}	-	1.5	mA	$V_{CE}=40\text{ V}$
Thermal Resistance	$R_{TH(JC)}$	-	0.9	°C/W	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$
Input Power	P_{IN}	-	4.5	W	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$
Power Gain	G_p	7.5	-	dB	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$
Collector Efficiency	η_c	35	-	%	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$
Input Return Loss	RL	6	-	dB	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC}=36\text{ V}$, $P_{OUT}=25\text{ W}$, $F=3.1, 3.3, 3.5\text{ GHz}$

Broadband Test Fixture Impedances

F(GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
3.10	$16.0 + j5.5$	$19.0 + j3.4$
3.30	$14.5 + j1.6$	$14.2 - j2.8$
3.50	$11.3 + j0.0$	$10.7 - j3.3$

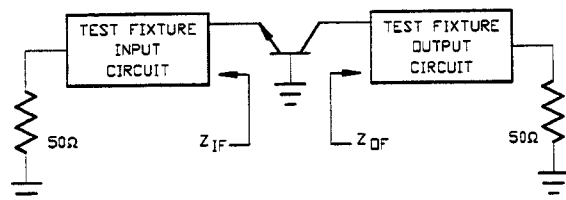

Specifications Subject to Change Without Notice.

9-254


M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883


Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

RF Test Fixture

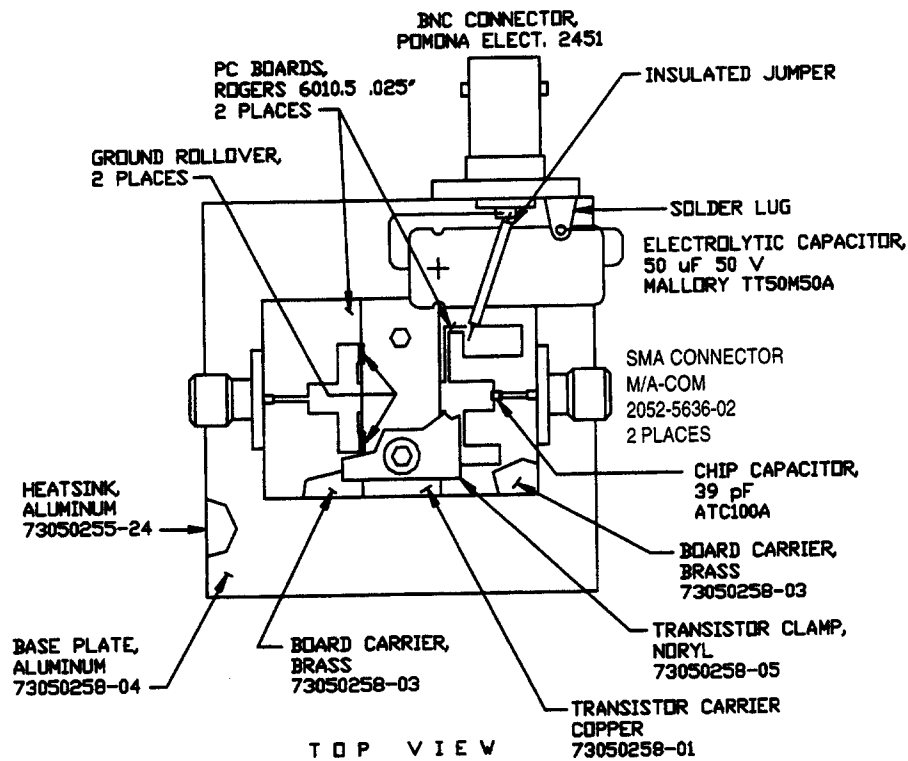

Test Fixture PC Board Dimensions

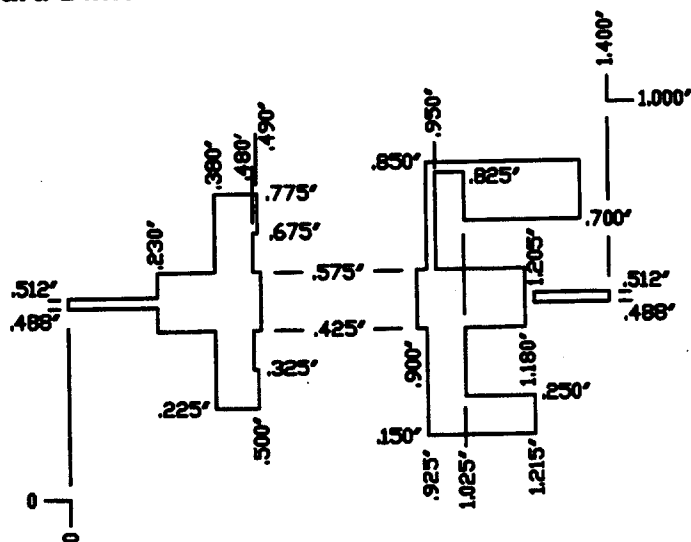

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

9-255