

FAST RECOVERY RECTIFIERS

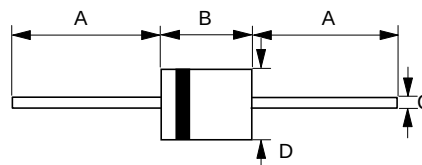
REVERSE VOLTAGE - **50 to 1000** Volts
FORWARD CURRENT - **6.0** Amperes

FEATURES

- Fast switching for high efficiency
- Low cost
- Diffused junction
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case : JEDEC R-6 molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.07 ounces, 2.1 grams
- Mounting position : Any

R-6


R-6		
Dim.	Min.	Max.
A	25.4	-
B	8.60	9.10
C	1.20 $\varnothing$	1.30 $\varnothing$
D	8.60 $\varnothing$	9.10 $\varnothing$
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	PR6001	PR6002	PR6003	PR6004	PR6005	PR6006	PR6007	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA=60 °C	I(AV)	6.0							A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	IFSM	300							A
Maximum forward Voltage at 6.0A DC	V _F	1.2							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25 °C @T _J =100 °C	I _R	10 150							uA
Maximum Reverse Recovery Time (Note 1)	T _{RR}	150				250	500		ns
Typical Junction Capacitance (Note 2)	C _J	140				70			pF
Typical Thermal Resistance (Note 3)	RθJA	32							°C/W
Operating Temperature Range	T _J	-55 to +125							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

NOTES : 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{RR}=0.25\text{A}$.
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
3. Thermal Resistance Junction to Ambient.

REV. 2, 01-Dec-2000, KDBG01

