




Main features

- Models 09, 11, 20
- Servo mounting
- Independent linearity up to $\pm 0,05\%$ (standard $\pm 0,5\%$)
- Repetibility 0,01% C.E.T.
- Rotation speed ≤ 600 r.p.m.
- Life duration: $>100 \times 10^6$ operations at 10 r.p.s. (within C.E.U.)
- Infinite resolution
- Electrical terminals: turrets
- Grade of protection IP40

TECHNICAL DATA

Model	09 - 11 - 20
Vibrations	5...2000Hz, $A_{max} = 0,75$ mm $a_{max} = 20$ g
Shock	50 g, 11ms.
Hysteresis (backlash)	$\leq 15''$ of arc
Intermediate pick-offs (TAPS)	on request (max. 4)
Electrical terminals	Gold plated turrets
Torque	$\leq 0,20$ Ncm
Rotation speed	≤ 600 r.p.m.
Life duration (within C.E.U.)	$>100 \times 10^6$ operations
Tolerance on resistance total	$\pm 20\%$ other values by request
Recommended cursor current	$< 0,1 \mu A$
Maximum cursor current	10mA
Electrical isolation	$>100 M\Omega$ at 500V=, 1bar, 2s
Dielectric strength	$< 100 \mu A$ at 500V~, 50Hz, 2s, 1bar
Dissipation at 40°C (0W at 120°C)	see table
Temp. Coeff. of the resistance	-200 ± 200 ppm/°C
Actual Temperature Coefficient of the output voltage	$< 1,5$ ppm/°C
Working temperature	$-55...+100^\circ C$
Storage temperature	$-55...+125^\circ C$
Case material	Diallylphthalate
Shaft material	AISI 316
Bearings	High precision with double (ZZ) sealed screen in stainless steel
Flange	Anodised aluminium

MECHANICAL DIMENSIONS

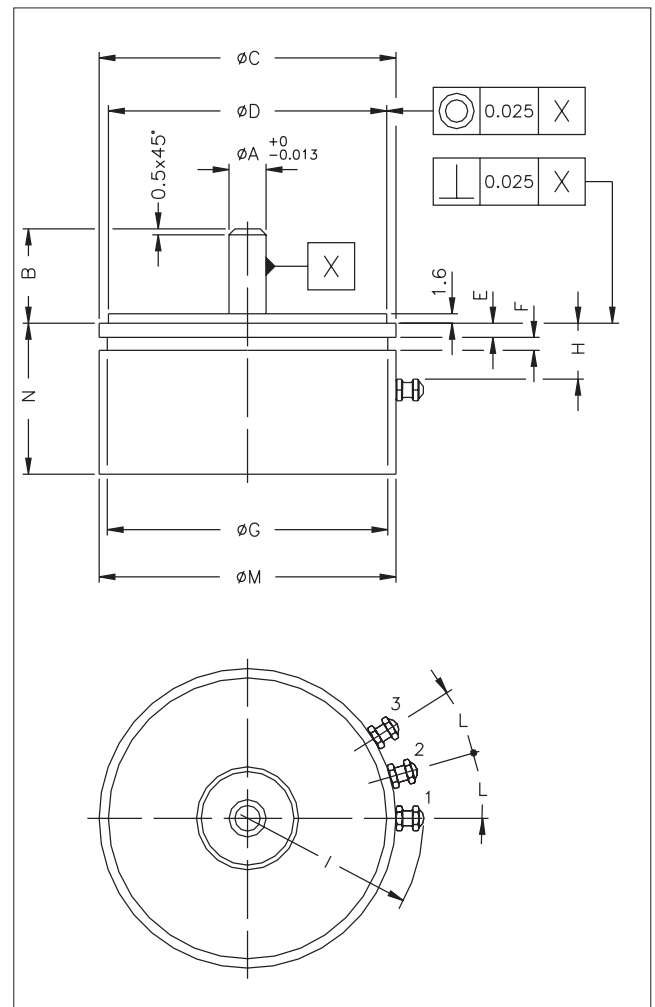


Important: all the data reported in the catalogue linearity, lifetime, temperature coefficient are valid for a sensor utilization as a ratiometric device with a max current across the cursor $I_c \leq 0.1 \mu A$.

MECHANICAL / ELECTRICAL DATA

MODEL		PS09	PS11	PS20
Theoretical electrical stroke (C.E.T.)	°	340 ± 4°	345 ± 4°	350 ± 4°
Useful electrical stroke (C.E.U.)	°	C.E.T. - 2°		
Resistance ± 20% (C.E.T.)	kΩ	1 - 4.7 - 10		
Independent linearity (within C.E.U.)	±%	A = ± 1% B = ± 0,5% C = ± 0,25% D = ± 0,1% E = ± 0,05%		
Dissipation at 40°C (0W at 120°C)	W	1	1,25	3
Mechanical rotation	°	360° continuous		
Weight	g	16	20	90

ELECTRICAL CONNECTIONS




Clockwise viewed from shaft side

DIMENSIONS

DIMENSIONS (mm)	DESCRIPTION	SIZE / MODEL 09 / PS09	SIZE / MODEL 11 / PS11	SIZE / MODEL 20 / PS20
ø A + 0/0.013	ø Stainless steel shaft	3.175	3.175	6.35
B max.	Shaft length	16	16	16
ø C max.	External ø of flange	22.25	27.05	50.8
ø D	ø flange	19.05	24.608	47.625
	Tolerance on flange	+0 -0.013	+0 -0.013	+0 -0.025
E	Shoulder	1.6	1.6	2.4
F min.	Width of groove	1.5	1.5	2.2
ø G max.	Diameter of groove	20	25	48
H min.	Locating turrets	6	6	10
I max.	Radius on turrets	16	18	30
L ± 2°	Angle between turrets	30°	25°	15°
M max.	External ø of case	22.2	27	50.8
N max.	Length for Nr. of elements = 1	21	21	24

MOUNTING DIAGRAM

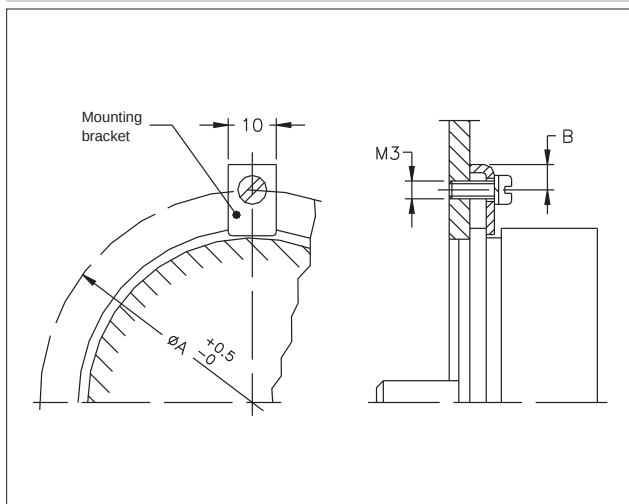

ORDER OCODE

Rotative transducer PS

Model

Linearity (std. B)	A = ± 1%
	B = ± 0,5%
	C = ± 0,25%
	D = ± 0,1%
	E = ± 0,05%

TAPS (std. 0)

0

Resistance value (std.103)	1kΩ	102
	4,7kΩ	472
	10kΩ	103

If requested, it is possible to supply models with non-standard mechanical and/or electrical features

Example: PS20 - 1 - B - 0 - 103

Rotative transducer model PS20, 1 resistive element, linearity ± 0,5%, no voltage or current intermediate pick-offs, 10kΩ resistance.

OPTIONAL ACCESSORIES

	Code
Fixing kit for PS: 3 brackets, M3x8TC screws, grower	
Rotative transducers PS09 - PS11	PKIT012
Rotative transducers PS20	PKIT013

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice



LEADER Electronic Co., Ltd
 116, Jianghuali, Jianghua Road, Jiangmen City, GD, PRC
 Tel: + 86 750 3101711, 3379183
 Fax: + 86 750 3388669
 Website: www.leadersensors.com
 E-mail: leader@leadersensors.com



cod. 84893-10/99