


PE-9

型密封压式称重传感器


材质: 合金钢

TYPE COMPRESSION LOAD CELL

Materials: Tool steel

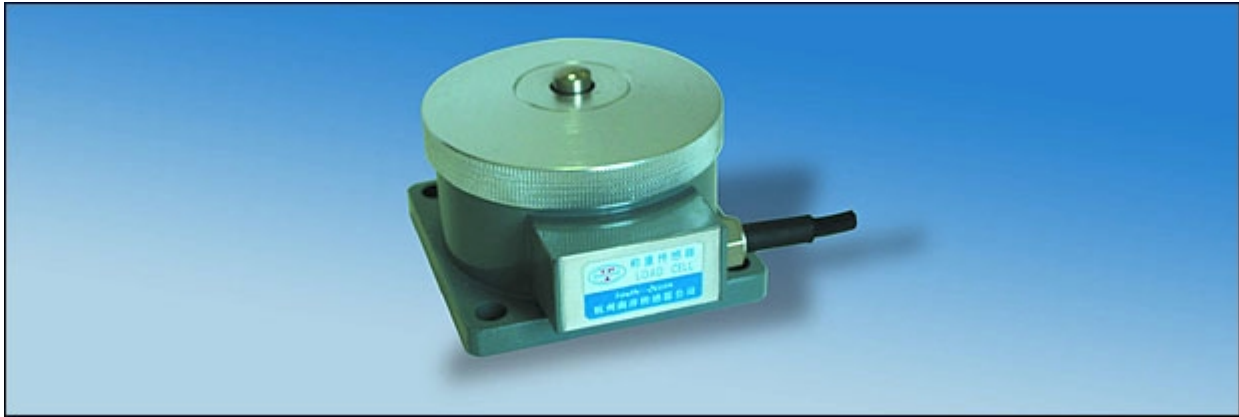

Main technical data	Unit	Technical quota
Sensitivity	mv/v	1.5±0.025
Nonlinearity	%FS	±0.03
Hysteresis	%FS	±0.03
Repeatability	%FS	0.02
Creep	%FS/30min	±0.03
Zero balance	%FS	±1
Zero temperature coefficient	%FS/10℃	±0.03
Rated output temperature coefficient	%FS/10℃	±0.03
Input resistance	Ω	385±10
Output resistance	Ω	350±3
Insulation resistance	MΩ	≥5000
Supply Voltage	V	10 (DC/AC) MAX:15 (DC/AC)
Temperature compensation range	℃	-10~+50
Safe temperature range	℃	-20~+60
Safe overload	%FS	120
Connect cable	mm	φ 5x3000
Method of connecting wire	input:Red(+)Black(-)	output:Green(+)White(-)

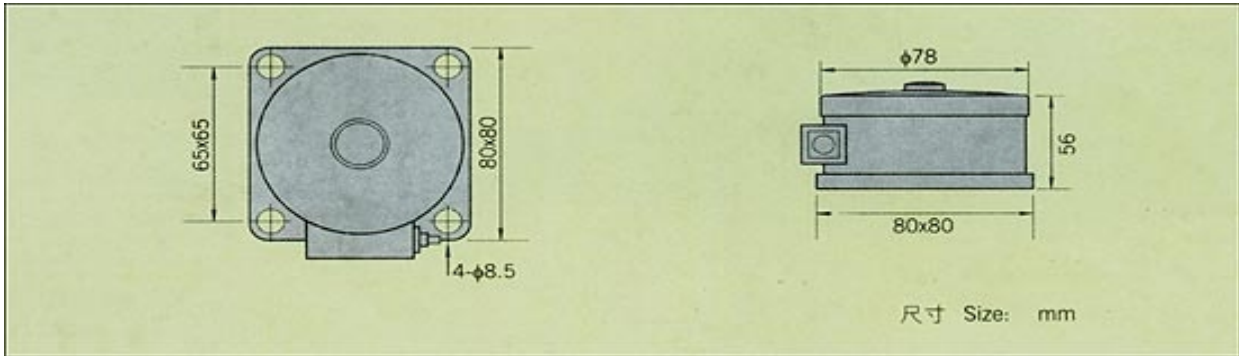

RATED LOAD:

3, 5, 10, 15, 20, 25, 30, 50, 100, 150kg