



PI74ST1G79

SOTiny™ Logic
Single Positive-Edge-Triggered
D-Type Flip-Flop

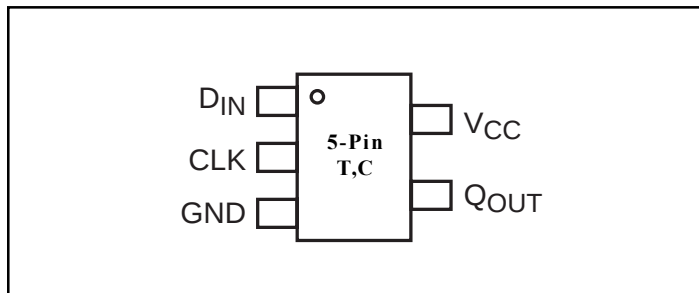
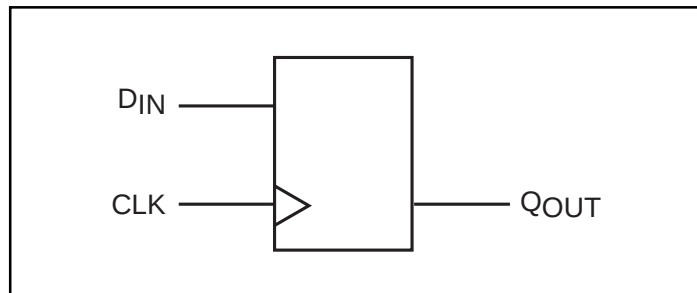
Features

- High-speed: $t_{PD} = 1.8\text{ns}$ typical
- Broad operating range: $V_{CC} = 1.8\text{V} - 3.6\text{V}$
- Power down high-impedance inputs/outputs
- High output drive: $\pm 24\text{mA}$ at $3\text{V } V_{CC}$
- Package: 5-pin space saving SOT23 and SC70

Description

The PI74ST1G79 is a Single Positive-Edge-Triggered D-Type Flip-Flop that operates over the 1.8V to $3.6\text{V } V_{CC}$ operating range.

Pericom's PI74ST series of products are produced using the Company's advanced submicron technology.

Pinout**Block Diagram****Pin Description**

Pin Names	Description
CLK	Clock
DIN	Input
QOUT	Output

Function Table

Inputs		Output
CLK	D	Q
↑	H	H
↑	L	L
L	X	Q ₀

Notes:

H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care

↑ = LOW-to-HIGH Transition

Q₀ = Level of Q before the indicated steady-state input conditions were established.

Recommended Operating Conditions⁽¹⁾

Parameter	Condition	Min.	Max.	Units
Supply Voltage (V_{CC})		1.8	3.6	V
Input Voltage (V_{IN})		0	5.5	
Output Voltage (V_{OUT})		0	V_{CC}	
Operating Temperature		-40	85	°C
Input Rise and Fall Time (t_r, t_f)	$V_{CC} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	20	ns/V
	$V_{CC} = 3.3\text{V}, \pm 0.3\text{V}$	0	10	

Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

Absolute Maximum Ratings

Supply Voltage (V_{CC})	 -0.5V to +4V
DC Input Voltage (V_{IN})	 -0.5V to +6V
DC Output Voltage (V_{OUT})	 -0.5V to +6V
DC Input Diode Current (I_{IK})	 -50mA to 20mA
DC Output Diode Current (I_{OK})	 -50mA to 20mA
DC Output Current (I_{OUT})	 ±50mA
DC V_{CC} /GND Current (I_{CC}/I_{GND})	 ±50mA
Storage Temperature (T_{STG})	 -65°C to +150°C
Junction Lead Temperature (IOS)	 200°C
Power Dissipation SOT23	 200mW
SC70	 150mW

Note:

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameter	V _{CC} (V)	Conditions		T _A = +25°C			T _A = −40°C to +85°C		Units	
					Min.	Typ.	Max.	Min.	Max.		
V _{IH}	HIGH Level Input Voltage	1.8 2.3-3.6			0.75V _{CC} 0.70V _{CC}			0.75V _{CC} 0.70V _{CC}			
V _{IL}	LOW Level Input Voltage	1.8 2.3-3.6					0.25V _{CC} 0.30V _{CC}		0.25V _{CC} 0.30V _{CC}		
V _{OH}	HIGH Level Output Voltage	1.8	V _{IN} = V _{IH}	I _{OH} = −100μA	1.7	1.79		1.7		V	
		2.3			2.2	2.29		2.2			
		3.0			2.9	2.99		2.9			
		2.3		I _{OH} = −8mA	1.9	2.13		1.9			
3.0		I _{OH} = −16mA	2.4	2.71		2.4					
3.0		I _{OH} = −24mA	2.3	2.55		2.3					
V _{OL}	LOW Level Output Voltage	1.8	V _{IN} = V _{IH}	I _{OL} = 100μA		0.01	0.1		0.1		μA
		2.3				0.01	0.1		0.1		
		3.0				0.00	0.1		0.1		
		2.3		I _{OL} = 8mA	0.10	0.3		0.3			
3.0		I _{OL} = 16mA	0.18	0.4		0.4					
3.0		I _{OL} = 24mA	0.28	0.55		0.55					
I _{IN}	Input Leakage Current	0-3.6	0 ≤V _{IN} ≤5.5V		−1		1	−1	1		
I _{OFF}	Power Off Leakage Current	0.0	V _{IN} or V _{OUT} = 5.5V		−1		1	−1	1		
I _{CC}	Quiescent Supply Current	1.8-3.6	V _{IN} = 5.5V, GND				1.0		10		

AC Electrical Characteristics

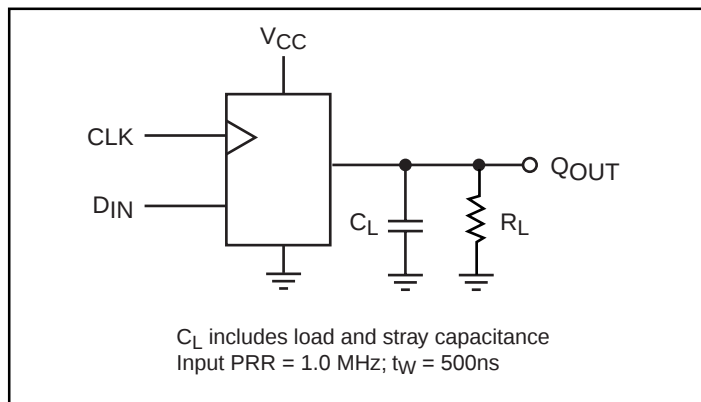
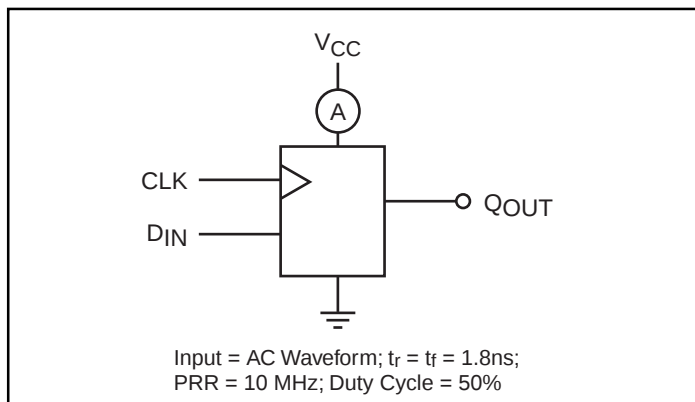
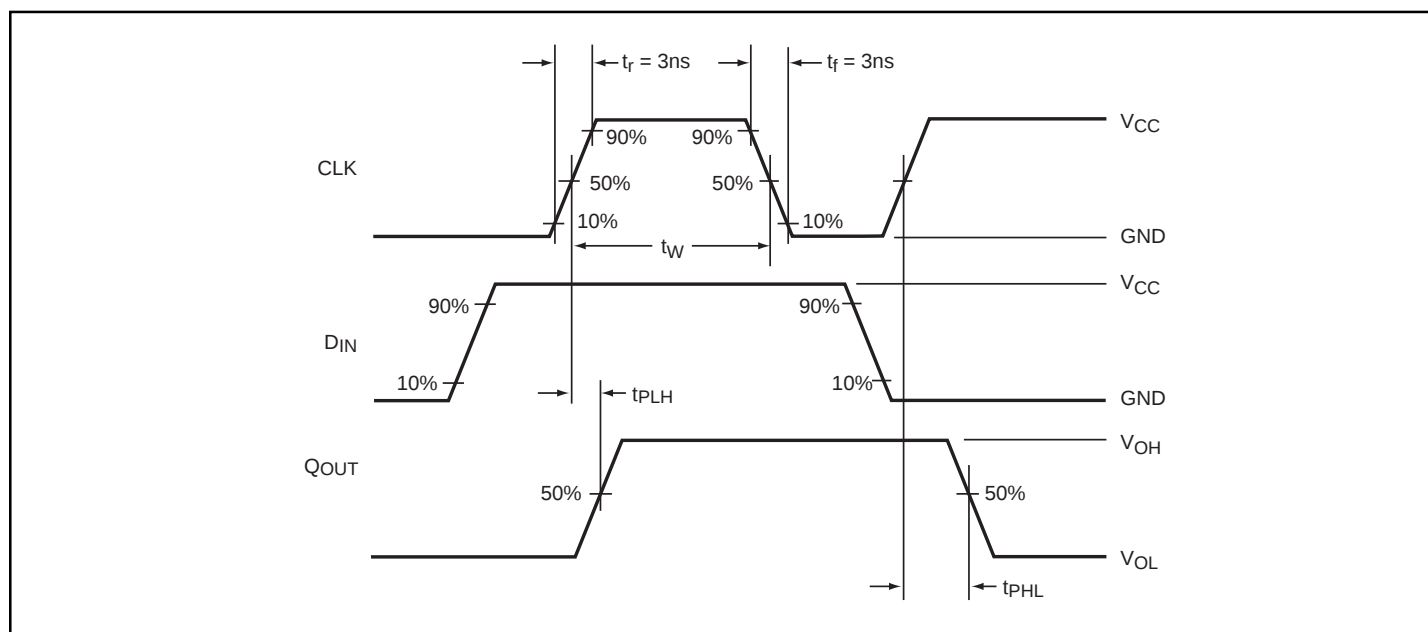
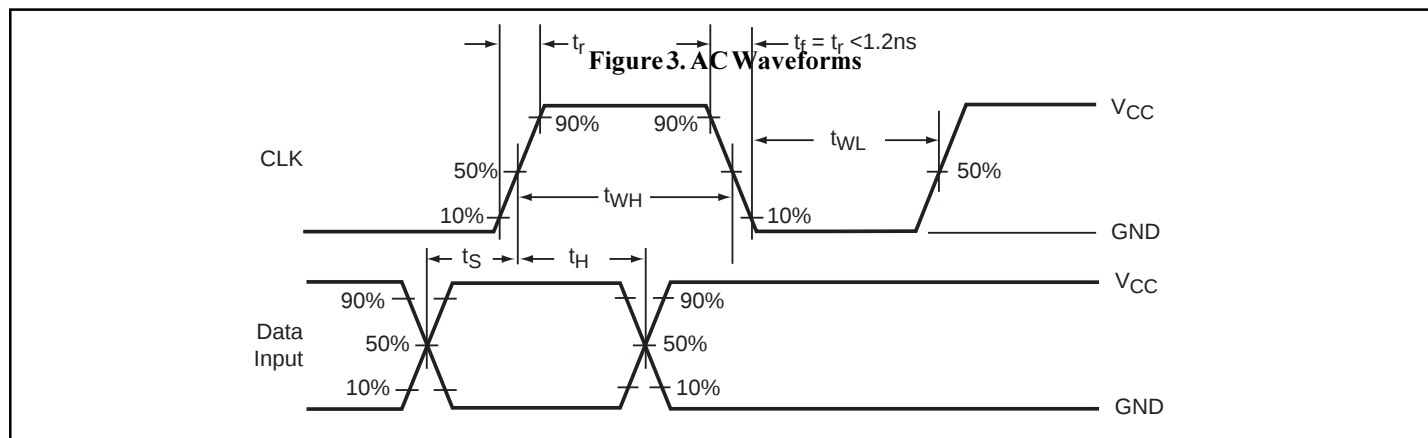
Symbol	Parameter	V _{CC} (V)	Conditions	T _A = +25°C			T _A = -40°C to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
f _{MAX}	Maximum Clock Frequency	1.8 2.5 ±0.2 3.3 ±0.3	C _L = 50pF, R _L = 500Ω				100 125 150		MHz	1 3
t _{PLH} , t _{PHL}	Propagation Delay CLK to Q _{OUT}	1.8 2.5 ±0.2 3.3 ±0.3	C _L = 15pF, R _L = 1MΩ	2.5 2.0 1.5	3.9 2.5 1.8	8.5 5.5 3.8	2.5 2.0 1.4	9.4 6.0 4.3	ns	1 3
		3.3 ±0.3	C _L = 50pF, R _L = 500Ω	2.0	3.3	5.5	1.6	6.2		1 3
t _S	Setup Time, CLK to D _{IN}	2.5 ±0.2 3.3 ±0.3	C _L = 50pF, R _L = 500Ω				2.5 2.0			1 4
t _H	Hold Time, CLK to D _{IN}	2.5 ±0.2 3.3 ±0.3	C _L = 50pF, R _L = 500Ω				1.5 1.5			1 4
t _W	Pulse Width, CLK	2.5 ±0.2 3.3 ±0.3	C _L = 50pF, R _L = 500Ω				3.0 2.8			1 4

Capacitance⁽³⁾

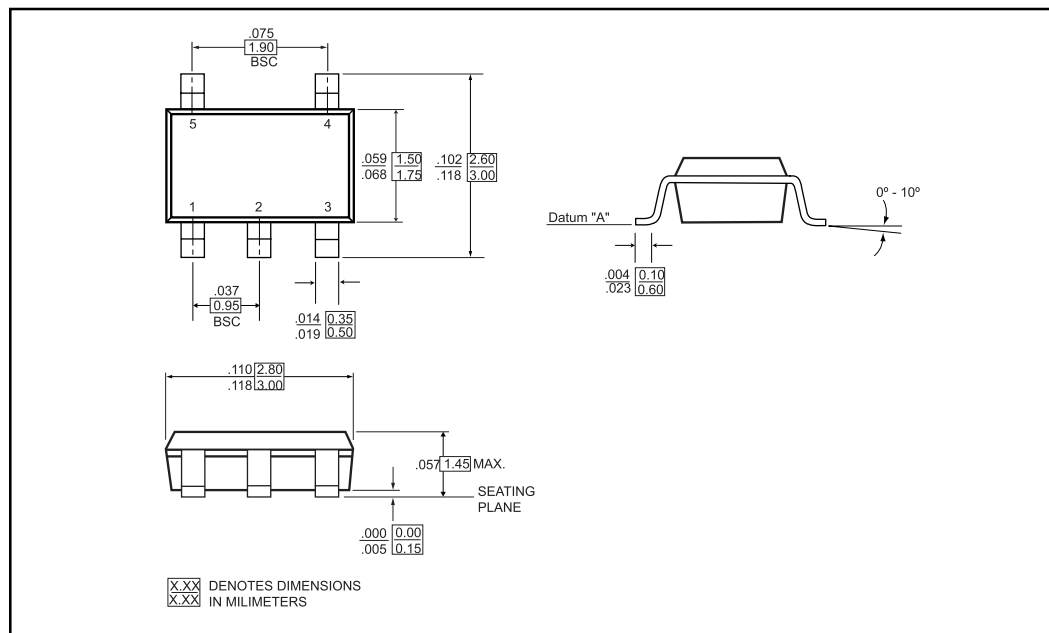
Symbol	Parameter	Typ.	Max.	Units	Conditions
C _{IN}	Input Capacitance	3		pF	V _{CC} = Open, V _{IN} = 0V or V _{CC}
C _{OUT}	Output Capacitance	4			V _{CC} = 3.3V, V _{IN} = 0V or V _{CC}
C _{PD}	Power Dissipation Capacitance ⁽⁴⁾	10 12			V _{CC} = 3.3V V _{CC} = 5.0V

Notes:

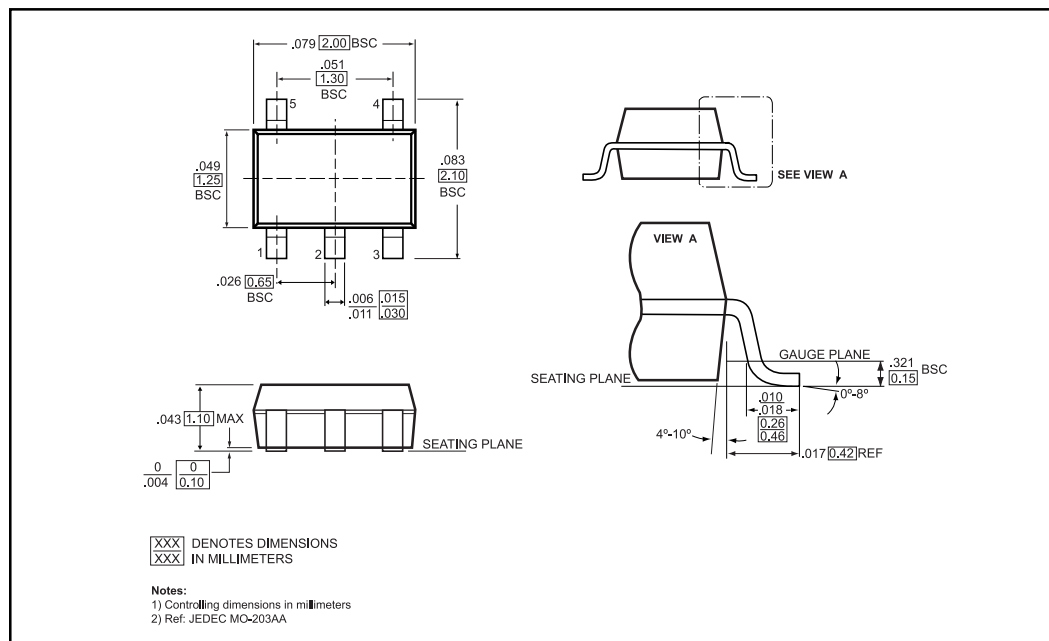
- T_A = +25°C, f = 1 MHz
- C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle (see Figure 2). C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CC} static).

AC Loading and Waveforms

Figure 1. AC Test Circuit

Figure 2. ICCD Test Circuit

Figure 3. AC Waveforms

Figure 4. AC Waveforms

5-Pin SOT23 Package (T)



5-Pin SC70 Package (C)



Ordering Information

Part	Pin-Package	Operating Range
PI74ST1G79TX	5-Pin - SOT23	-40°C to 85°C
PI74ST1G79CX	5-Pin - SC70	

Pericom Semiconductor Corporation

2380 Bering Drive • San Jose, CA 95131 • 1-800-435-2336 • Fax (408) 435-1100 • <http://www.pericom.com>