



Features



- Transmit/Receive, Link Status View at Each Port
- Two-Position Single or Bi-Color Combinations
- Arrayable Design
- Mounting Tabs for Easy PCB Placement
- High On/Off Contrast
- Each LED Shielded from Adjacent LEDs
- Co-Planar Alignment for Easy Panel Mounting
- Improves Panel Aesthetics
- High Intensity/Low Power
- Fast Turn On/Off Time I.C. Compatible


Applications

- Modems
- Status Indicators Transmit/Receive Link
- Telecommunications
- LAN Applications in Adapter Cards & Routers
- Telecom Switches, Data Comm Bridges/Routers

Options

- Super Bright LEDs
- Special Bi-Color LEDs
- Choice of Other Colors
- Clear Lens LEDs
- 5/12V Integrated LEDs
- Flashing/Blinking LEDs

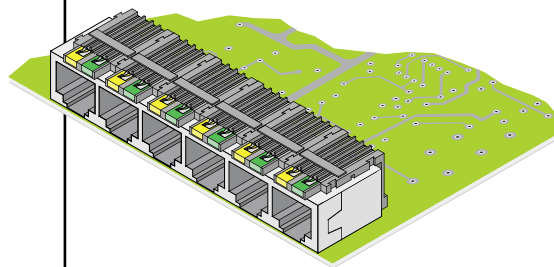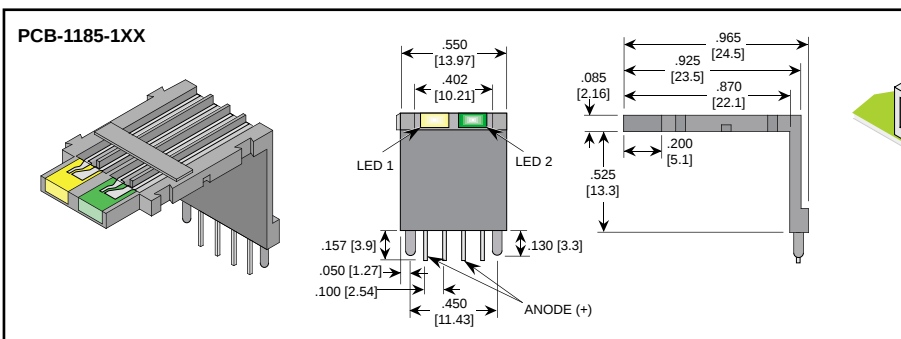

Part Number	LED Color	Lens Type/ Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
PCB-1185-122	HE RED	DIFFUSED	20	6.6	2.0/2.6	635	
PCB-1185-144	YELLOW		20	6.0	2.1/2.6	585	
PCB-1185-166	HE GREEN		20	8.0	2.2/2.6	568	
1.8 x 3.8mm Rectangular Bi-Color LED							
PCB-1185-1RG	HE RED	DIFFUSED	20	5.0	2.0/2.6	635	
	HE GREEN		20	8.0	2.2/2.6	568	
PCB-1185-1YG	YELLOW		20	7.0	2.1/2.6	585	
	HE GREEN		20	10.0	2.2/2.6	568	

Part number code for additional combinations

For units with two LEDs


PCB-1185-XXX

Number of arrayed units
Color of LED 1
Color of LED 2
Bicolor option

For units with mixed bicolor LEDs, consult LEDtronics for a part number

Color code

- UL RED
- HE RED
- ORANGE
- YELLOW
- HE GREEN
- P GREEN

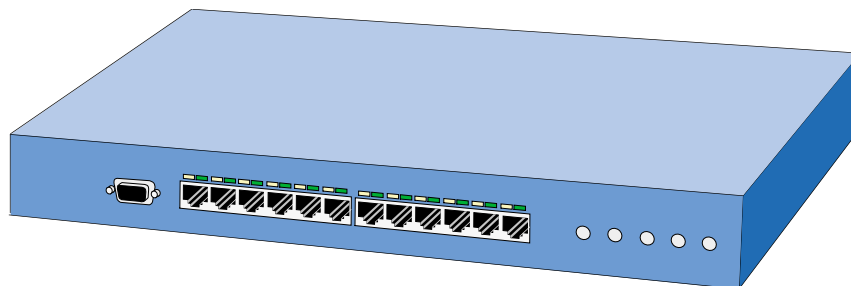

Arrayable Design

