
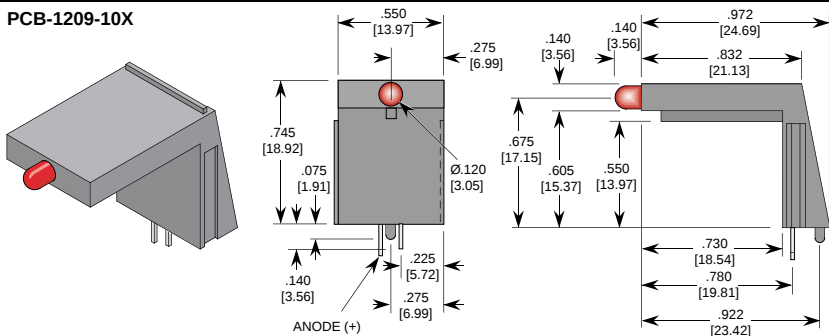


PCB-1209-10X



Part Number	LED Color	Lens Type/ Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
PCB-1209-102	HE RED 	DIFFUSED	20	32.0	2.0/2.6	635	
PCB-1209-104	YELLOW 		20	29.0	2.0/2.6	585	
PCB-1209-106	HE GREEN 		20	50.0	2.2/2.6	568	
3mm Std Dome Bi-Color LED							
PCB-1209-1RG	HE RED 	DIFFUSED	20	5.5	2.0/2.6	635	
	HE GREEN 		20	10.0	2.2/2.6	568	
PCB-1209-1YG	YELLOW 		20	4.5	2.1/2.6	585	
	HE GREEN 		20	8.0	2.2/2.6	568	

Part number code for additional combinations

For units with one LED


PCB-1209-XXX


Number of arrayed units
Color of LED
Bicolor option

Color code

- UL RED
- HE RED
- ORANGE
- YELLOW
- HE GREEN
- P GREEN

PCB-1209-10X-01

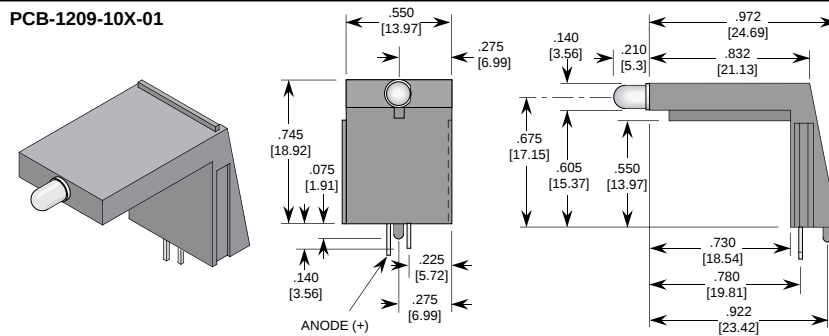

Part Number	LED Color	Lens Type/ Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
PCB-1209-102-01	HE RED	DIFFUSED	20	32.0	2.0/2.6	635	
PCB-1209-104-01	YELLOW		20	42.0	2.1/2.6	585	
PCB-1209-106-01	HE GREEN		20	45.0	2.2/2.6	568	
3mm Std Dome Bi-Color LED							
PCB-1209-1RG-01	HE RED	DIFFUSED	20	5.5	2.0/2.6	635	
	HE GREEN		20	10.0	2.2/2.6	568	
PCB-1209-1YG-01	YELLOW		20	4.5	2.1/2.6	585	
	HE GREEN		20	8.0	2.2/2.6	568	

Part number code for additional combinations

For units with one LED


PCB-1209-XXX-01

Number of arrayed units
Color of LED
Bicolor option
Narrower 40° beam option (2 θ 1/2)

Color code

- UL RED
- HE RED
- ORANGE
- YELLOW
- HE GREEN
- P GREEN

Arrayable Design



PCB-1209-20X

