
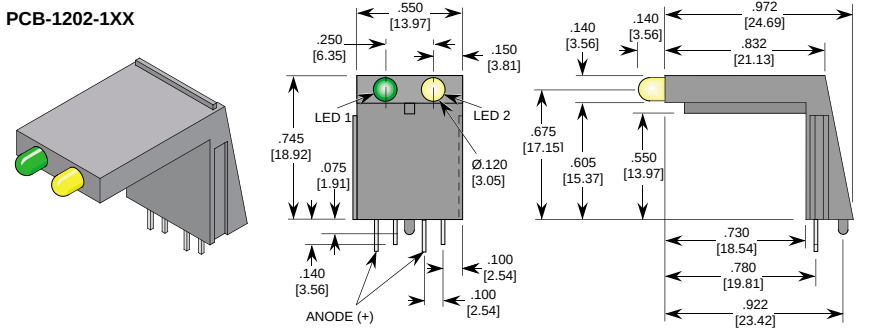


PCB-1202-1XX



Part Number	LED Color	Lens Type/ Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
PCB-1202-122	HE RED	DIFFUSED	20	32.0	2.0/2.6	635	
PCB-1202-144	YELLOW		20	29.0	2.0/2.6	585	
PCB-1202-166	HE GREEN		20	50.0	2.2/2.6	568	
3mm Std Dome Bi-Color LED							
PCB-1202-1RG	HE RED	DIFFUSED	20	5.5	2.0/2.6	635	
	HE GREEN		20	10.0	2.2/2.6	568	
PCB-1202-1YG	YELLOW		20	4.5	2.1/2.6	585	
	HE GREEN		20	8.0	2.2/2.6	568	

Part number code for additional combinations

For units with two LEDs

PCB-1202-XXX


Number of arrayed units
Color of LED 1
Color of LED 2
Bicolor option


For units with mixed bicolor LEDs, consult LEDtronics for a part number

Color code

- 1 UL RED
- 2 HE RED
- 3 ORANGE
- 4 YELLOW
- 6 HE GREEN
- 7 P GREEN

PCB-1202-1XX-01

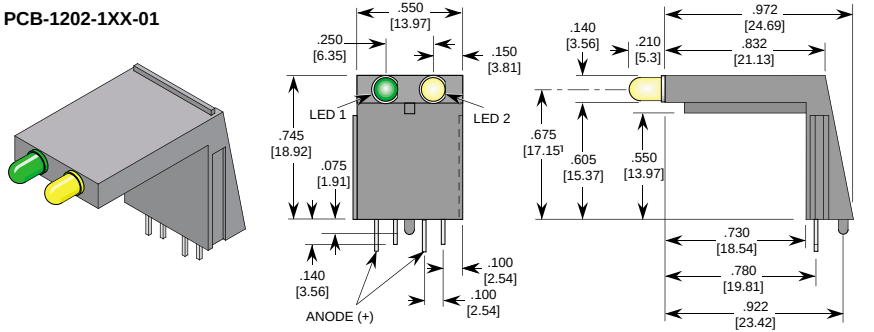

Part Number	LED Color	Lens Type/ Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
PCB-1202-122-01	HE RED	DIFFUSED	20	32.0	2.0/2.6	635	
PCB-1202-144-01	YELLOW		20	42.0	2.1/2.6	585	
PCB-1202-166-01	HE GREEN		20	45.0	2.2/2.6	565	
3mm Std Dome Bi-Color LED							
PCB-1202-1RG-01	HE RED	DIFFUSED	20	5.5	2.0/2.6	635	
	HE GREEN		20	10.0	2.2/2.6	565	
PCB-1202-1YG-01	YELLOW		20	4.5	2.1/2.6	585	
	HE GREEN		20	8.0	2.2/2.6	565	

Part number code for additional combinations

For units with two LEDs

PCB-1202-XXX-01



Number of arrayed units
Color of LED 1
Color of LED 2
Bicolor option
Narrower 40° beam option (2 6 1/2)

For units with mixed bicolor LEDs, consult LEDtronics for a part number

Color code

- 1 UL RED
- 2 HE RED
- 3 ORANGE
- 4 YELLOW
- 6 HE GREEN
- 7 P GREEN

Arrayable Design

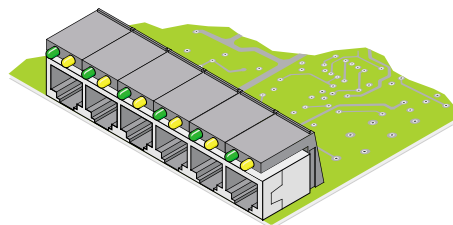

Please Contact Local Representative or Distributor