


NEW PRODUCT RELEASE

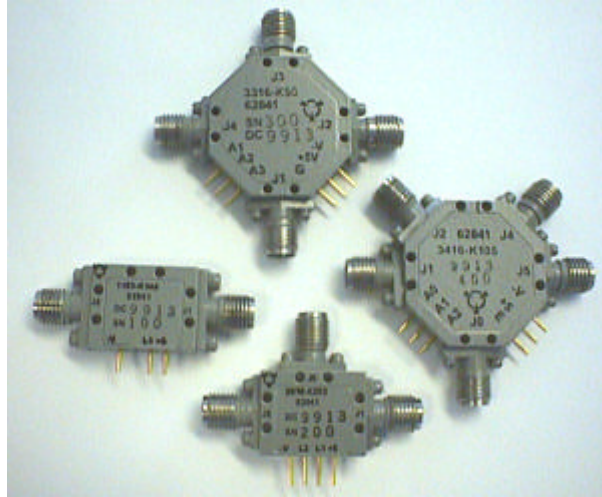

TWO WEEK DELIVERY!

PIN Diode Switches

Ultra-miniature SPST, SP2T, SP3T and SP4T Switches operate over the frequency range of 2-18 GHz with less than 100 nsec switching speed. These switches are designed to operate from -55 to +100°C and have removable connectors for drop-in applications. Customized variants of these standard switches are also readily available with slightly longer deliveries.

Please contact the factory for complete specifications:

Robinson Laboratories, Inc.
1 Tanguay Avenue
Nashua, NH 03063

Telephone: (603) 880-7880
Fax: (603) 880-4349
E-Mail: sales@roblab.com

